

GARDENLIFE 2024



NEW ENERGY FROM NATURE

Not only water, but also energy plays a leading role in our life cycle on Earth.
In what will, paradoxically, be an evolutionary step for our civilisation, research and technology will help us to rediscover and respect the strength of Nature, and to find in it clean energy to promote our well-being.
That's why protecting the environment and supporting science are the most prudent investment for a fuller, more balanced life.
A path that Claber has always followed and that has now attained new levels through the development of innovative technologies that promote the contribution of renewable energies as the only source for operating our products.
A smart transition in perfect balance with Nature which, thanks to research, will lead to a way of life that is increasingly sustainable without relinquishing convenience and well-being.
An exciting path to follow together.

claber®

INDEX

From Claber expertise comes the most extensive range of DIY irrigation products in the market. Three specific lines offering tailor-made solutions; several product families made to last and that make everyday irrigation easier.



THE NEW WELLNESS IS CALLED HOME 4



THE PROFESSIONAL LINE 170

MERCHANDISING 174

PRODUCT CODE LIST 180

PACKAGING KEY TO SYMBOLS

- Dispenser (size 20x39x13)
- Small dispenser (size 10x39x13)
- Hanging carded pack
- Roll of hose
- Box
- Pallet

ABOVE-GROUND IRRIGATION 10 - 81



TAP CONNECTORS 14

QUICK-CLICK SYSTEM AUTOMATIC COUPLINGS 20

SPRAY NOZZLES AND PISTOLS 24

ERGOGRIP SYSTEM 22

AQUAMASTER 30

METAL-JET 36

SPRINKLERS 42

PULSATING SPRINKLERS 46

HOSE REELS AND CARTS 50

ROTOROLL EVOLUTION 60

SHOWER, CARRY CART, CLEANING 64

HAPPY FRESH EVOLUTION 66

HOSES 68

TWIDDY 76

TOP-LIGHT 78

SPIRAL KIT 80

DRIP IRRIGATION 82 - 129




BATTERY WATER TIMERS 86


MYAQUASOLAR TEMPO AND DUAL TIMERS 92


POLYETHYLENE HOSES 96


TRIPLE-SOAKER HOSE 101


TAP CONNECTORS 102


BLOCK-SYSTEM 103


COUPLINGS 106


DRIPPERS 112


READY-TO-USE KIT 116


MICRO-SPRINKLERS 119


AQUA-MAGIC SYSTEM 122


IDRIS SPIKE 125


OASIS EVOLUTION 126


AQUALUX SYSTEM 127

UNDERGROUND IRRIGATION 130 - 169




COLIBRÌ SYSTEM 134


TURBO-JET 137


MULTIPLA 138


AQUA-HOME 139


HYDRO-4 140


PROGRAMMABLE SOLENOID VALVES 142


SOLENOID VALVE 143


VALVE BOXES 162


POP-UP SPRINKLERS 146


TURBINES 152


ACCESSORIES 156


PIPES 163


COMPRESSION CONNECTORS 164

REDISCOVER CONTACT WITH THE EARTH

Get close to nature and take better care of our well-being

CONTACT WITH GRASS INSTILS WELL-BEING



01

IN BARE FEET

Walking in bare feet on grass is a relaxing experience with many health benefits that instils us with a deep feeling of freedom.
It's a simple, reinvigorating pleasure to be rediscovered every day, in our own garden.

An underground irrigation system even in small gardens? Here's Colibrì® System **(page 135)**

A TOUCH OF GREEN BRIGHTENS UP YOUR TERRACE




02

NATURE AND THE CITY

Greenery in the city protects us from summer temperatures that are getting hotter and hotter, as well as improving air quality and being easy on the eye.
So why not turn your terrace into a little green oasis of flowers where you can spend the loveliest hours of the day?

To create a drip-irrigation system in places where there isn't a tap, use Aqua-Magic System **(page 123)**

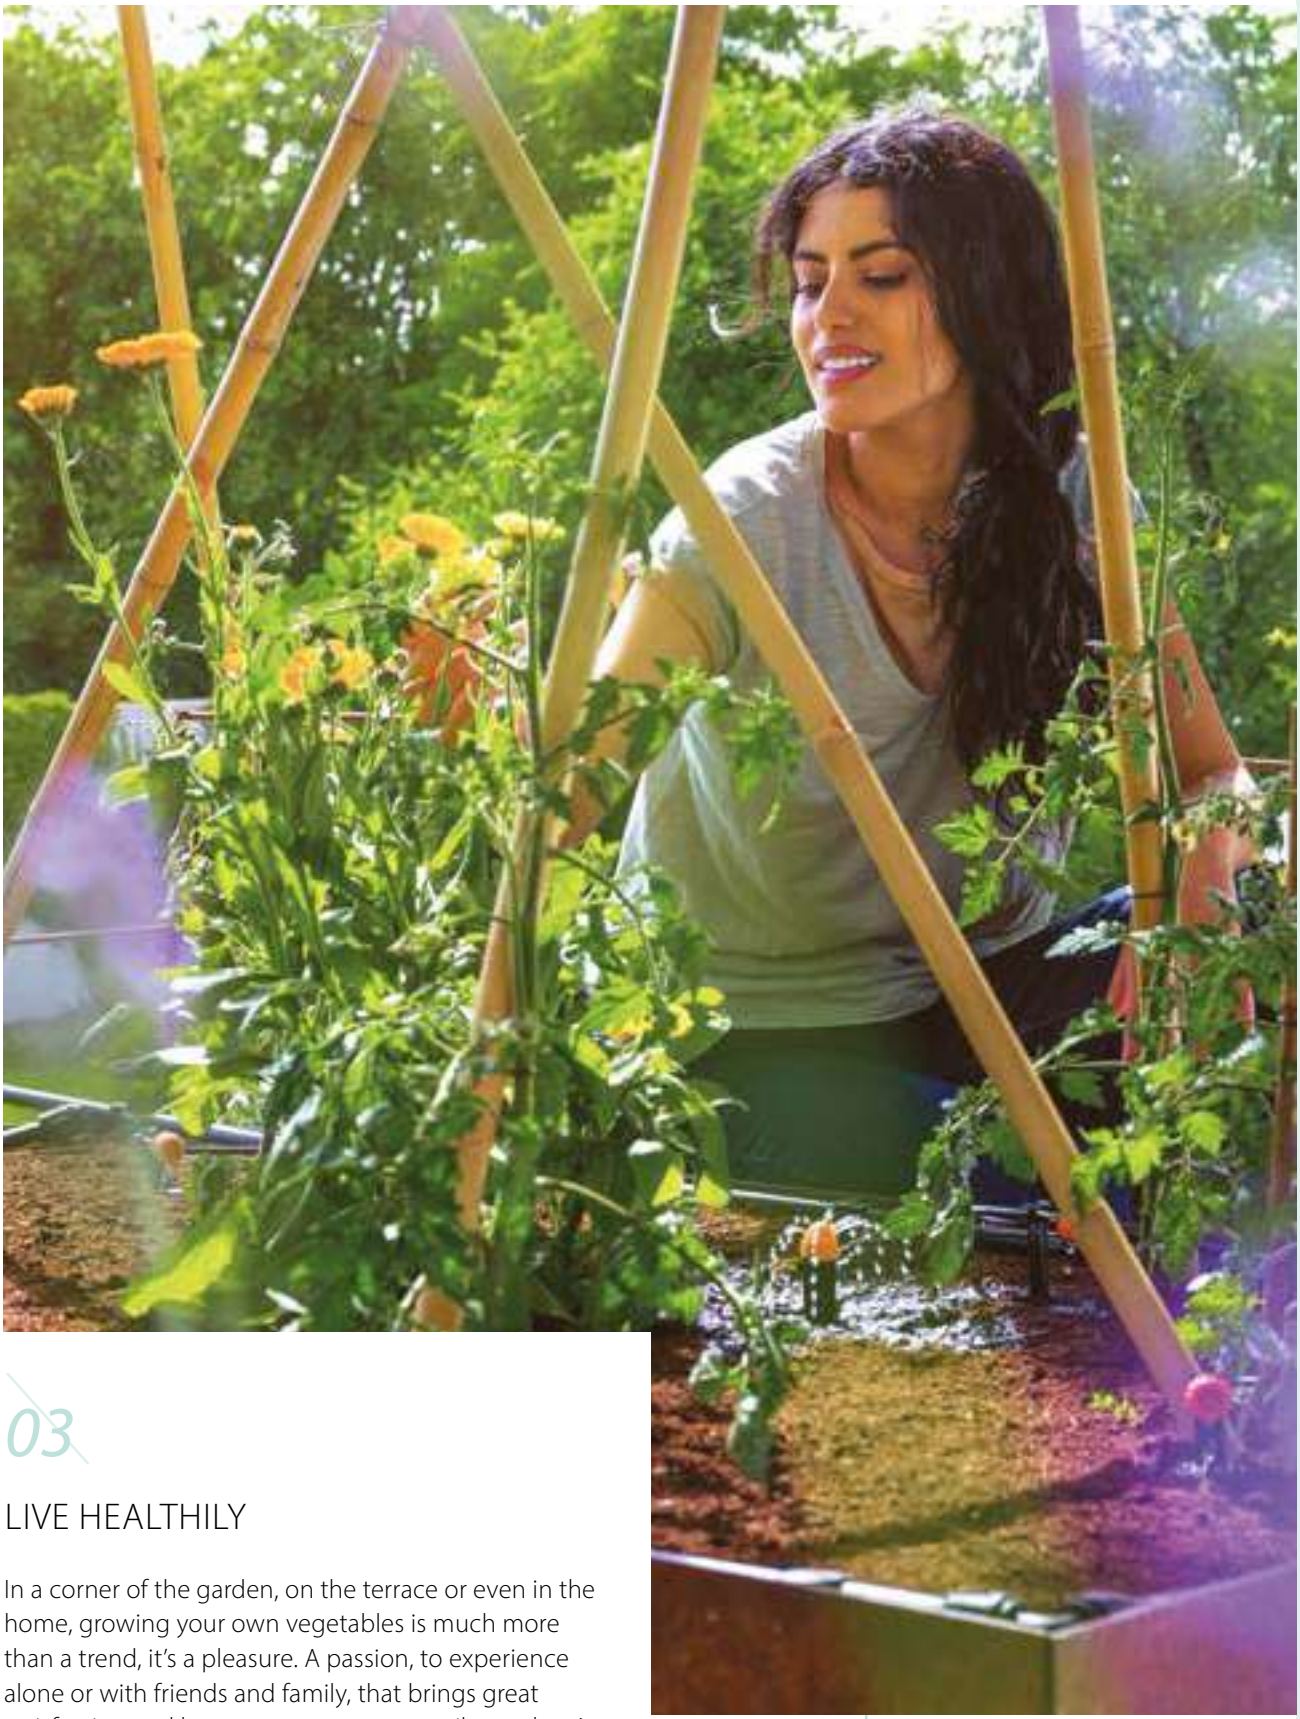

03

LIVE HEALTHILY

In a corner of the garden, on the terrace or even in the home, growing your own vegetables is much more than a trend, it's a pleasure. A passion, to experience alone or with friends and family, that brings great satisfaction and lets you taste true zero mile produce!

In the Orto Drip kit there's everything you need to create a DIY micro-irrigation system (page 116)

TOMATOES ARE AN ELIXIR FOR THE SKIN

FUNCTIONAL, ECO-SUSTAINABLE PRODUCTS, WHAT IS BEHIND THIS OBJECTIVE?

Research and new technologies to implement ethical production processes, creativity to make watering simpler and a boundless passion for Nature.
That's how Claber products are born.

Claber has always adhered to a sustainability programme, directed towards perfecting domestic irrigation and developing the industrial production cycles. A dual objective in which vision, research and investments come together to open the way to a rosy future for People and the Environment.
Science and technology are the stimuli we have chosen to come up with innovative actions and solutions, in our Company and in the world around us.
Advanced manufacturing systems, interconnected automation and management skill allow us to reduce energy consumption and emissions into the environment. Skilled professionals sharing a mutual green awareness to create a positive and proactive work environment. Research and the quality of raw materials give us the peace of mind to be able to present people with strong, durable products that are completely safe for their health.
The place that best represents our vision is Claber Lab, our hydro-pluviometric laboratory equipped with state-of-the-art technology, interconnected devices and water-recovery systems. Every day we carefully test the quality and durability of our products and the perfect calibration of the amount of water to give your plants.





IN THE LAB, PRODUCTS AND PROTOTYPES ARE SUBJECTED TO EXTREME CONDITIONS TO TEST THEIR EFFICIENCY AND RESISTANCE.

THE LAB'S WORK STATIONS ARE INTER-CONNECTED TO ANALYSE LARGE FLOWS OF DATA.



VISIT THE CLABER LAB





myAquaSolar App

WATERING AT
YOUR FINGERTIPS

Want to keep your watering under control?
It's easy with the myAquaSolar app: the smart app that works with the new myAquaSolar timers.
The intuitive interface communicates with the timer via Bluetooth®.
Once installed, it lets you programme one or more watering lines straight away, right from your smartphone with a simple tap.
myAquaSolar gives you the freedom to choose and manage the frequency and quantity of water, or to pause watering when it isn't needed.
A simple, flexible way to guarantee maximum wellbeing for your plants, respecting nature and saving precious water.



Bluetooth®



myAquaSolar

SAY GOODBYE TO BATTERIES AND HELLO TO 100% NATURAL TECHNOLOGY

With the new myAquaSolar timers, Claber marks the beginning of a new era, finding the perfect balance between innovation and sustainability.

Claber's research has given birth to a revolutionary new technology: myAquaSolar, the only timers in the world that function without needing to be connected to the mains or a battery. Powered only by natural light, the new timers benefit from a latest-generation built-in photovoltaic panel.
The performance levels of the new photovoltaic cell are so extraordinary that the timer can even be placed in partial shade, without needing prolonged direct exposure to the sun.
Say goodbye to batteries – this is the era of 100% natural irrigation.

NO BATTERY
100% SOLAR ENERGY

WORKS EVEN
IN PARTIAL SHADE

SMART PROGRAMMING WITH
THE MYAQUASOLAR APP

MYAQUASOLAR,
THE FIRST RANGE OF
SMART TIMERS USING
100% SOLAR ENERGY.
FIND OUT MORE
ON PAGE 93





ABOVE-GROUND IRRIGATION

WATERING IS A REAL PLEASURE

Everyone can find the right solution for their needs with Claber's extensive above-ground irrigation range.

The pistols and spray nozzles not only have a cutting-edge design, but they are also efficient and comfortable to hold, made of materials that guarantee perfect grip.

The sprinklers are lightweight yet sturdy, designed to last over time and handy to adjust.

This makes them perfect for any garden or green space. Our hoses are made of first choice materials and can be used with our extensive range of hose reels, helping you move freely around your garden.

Our automatic couplings, easy-to-install in a quick click, meet all the most common connection needs, ensuring no water waste.

Claber products not only look great, but are also handy and easy to use, making watering a relaxing and enjoyable experience.



Give value to the time you spend in the garden

Choose technology, without compromising on style





A MATTER OF STYLE

Convenience, the choice of different jet patterns, quality materials and a unique design: the wide range of spray nozzles and pistols perfectly represents Claber unmistakable Made in Italy style.

CONNECTING UP

Much more than just simple connectors and couplings. In addition to being the most comprehensive and universal range of products, Claber range stands out for the work that has been done on such a small yet vitally important accessory, for perfect irrigation with no wasted water.



WHEN EVERYTHING TURNS OUT RIGHT

Practical, lightweight and sturdy, Claber hose reels and carts have one sole purpose: making your life in the garden easier every day.



AN AQUATIC DELIGHT

Static, rotating, oscillating and pulsating sprinklers guarantee perfectly calibrated and even irrigation across the lawn, creating pleasant water patterns with a light rain effect.





A PRECIOUS MOMENT

Watering your flowers, lawn or vegetable patch first thing in the morning, or as the sun goes down in the evening. The smell of wet grass. Droplets of water sliding off the leaves, forming little streams on the ground. These are invaluable everyday moments that Claber helps you treasure with its range of products.

TAP CONNECTORS QUICK-CLICK® SYSTEM

Claber's answer to all of your tap connection needs: threaded with different diameters, smooth or with an aerator. The Quick-Click system is the easy way to connect up your watering hoses to all standard outdoor and indoor taps in one quick click! Claber's high quality materials guarantee resistant and long-lasting connectors. Universally compatible!

1/2" (15-21 mm) THREADED TAP CONNECTOR

8622

8623





To connect automatic Quick-Click couplings to a threaded tap by symply screwing it on.
Female 1/2" (15-21 mm) thread.
It is complete of washer.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8622		50	2,9 x 4,0 x 2,9	10 x 39 x 13	0,005	0,67	6000	8 000625 086221
8623		14	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,37	2016	8 000625 086238

3/4" (20-27 mm) THREADED TAP CONNECTOR

8626

8627





To connect automatic Quick-Click couplings to a threaded tap by symply screwing it on.
Female 3/4" (20-27 mm) thread.
It is complete of washer.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8626		100	3,5 x 4,1 x 3,5	20 x 39 x 13	0,010	1,48	7200	8 000625 086269
8627		14	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,40	2016	8 000625 086276

1" (26-34 mm) THREADED TAP CONNECTOR

8628

8629





To connect automatic Quick-Click couplings to a threaded tap by symply screwing it on.
Female 1" (26-34 mm) thread.
It is complete of washer.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8628		100	4,2 x 4,1 x 4,2	20 x 39 x 13	0,010	1,78	7200	8 000625 086283
8629		12	7,9 x 15,7 x 4,3	25 x 19 x 10	0,005	0,50	1728	8 000625 086290

MULTI THREADED TAP CONNECTOR 1/2" (15-21 mm) - 3/4" (20-27 mm)

8591

8804





To connect automatic Quick-Click couplings to a threaded tap by symply screwing it on.
Female 3/4" (20 - 27 mm) thread and 1/2" (15 - 21 mm) adaptor.
It is complete of washer.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8591		100	3,5 x 4,8 x 3,5	20 x 39 x 13	0,010	2,10	7200	8 000625 085910
8804		14	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,48	2016	8 000625 088041

MULTI THREADED TAP CONNECTOR 1" (26-34 mm) - 3/4" (20-27 mm)

8595

8803





To connect automatic Quick-Click couplings to a threaded tap by symply screwing it on.
Female 1" (26-34 mm) thread and 3/4" (20 - 27 mm) adaptor.
It is complete of washer.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8595		40	4,2 x 4,8 x 4,2	10 x 39 x 13	0,005	1,14	4800	8 000625 085958
8803		12	7,9 x 15,7 x 4,3	25 x 19 x 10	0,005	0,50	1728	8 000625 088034

DOUBLE TAP CONNECTOR

8598

8599





To connect 2 hoses at the same time to the tap.
Includes on/off valves and washer.
Easy attachment by simply screwing on.
With female 3/4" (20 - 27 mm) thread and a reducer to 1/2" (15 - 21 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8598		25	11,1 x 8,3 x 5,2	20 x 39 x 13	0,010	2,32	1800	8 000625 085989
8599		8	7,9 x 24 x 5	28 x 25 x 13	0,009	0,95	576	8 000625 085996

3/4" (20 - 27 mm) MALE THREADED TWO-WAY ADAPTER

8590

8589





For taps with 3/4" (20 - 27 mm) thread.
Includes on/off valves and washer.
Enables assembly of two water timers, pressure reducers, etc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8590		8	14,6 x 9,7 x 5,7	20 x 39 x 13	0,010	1,60	576	8 000625 085903
8589		5	15,4 x 24 x 5,3	28 x 25 x 19	0,013	1,29	240	8 000625 085897

4 OUTLETS DISTRIBUTOR

8580

8581





Converts one water tap into four outlets, each separately controlled, enabling different areas to be watered.
For taps with 3/4" (20 - 27 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8580		8	18,3 x 11 x 5,8	20 x 39 x 13	0,010	2,06	576	8 000625 085804
8581		5	15,4 x 24 x 5,3	28 x 25 x 19	0,013	1,57	240	8 000625 085811

1" F (26-34 mm) 3/4" M (20-27 mm) ADAPTER

8509





Converts the 3/4" (20 - 27 mm) female tap connector into a 1" (26 - 34 mm) female tap connector.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8509		12	7,9 x 15,7 x 3,0	25 x 19 x 10	0,005	0,40	1728	8 000625 085095



CONNECTORS

Practical connectors that last.

The Quick-Click connectors offer the best in terms of practicality and durability. They are resistant to knocks, weathering and UVA rays, as well as to high pressure. The spring inside – patented by Claber – withstands up to 1.5 million clicks without breaking. They also offer excellent compatibility as they have a standard pitch used around the world.

QUICK-CLICK® SYSTEM

JUST ONE SIMPLE CLICK

TAP CONNECTORS

Connect up in a flash



EASY TO USE

ULTRA-RESISTANT MATERIALS

FOR ALL TAP TYPES

3/4" (20-27 mm) QUICK-FIT TAP CONNECTOR

8587





3/4" (20-27 mm) indoor tap connector to attach a hose with a tap in the kitchen or bathroom.
For taps with 22 mm male or 24 mm female thread.
Connection with quick release lever clamp mechanism.
Complete with metal filter-aerator and adapter.
Quick-Click coupling. Fully watertight connection.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8587		10	7,9 x 15,7 x 4,3	25 x 19 x 10	0,005	0,75	1440

8 000625 085873

3/4" (20-27 mm) TAP CONNECTOR METAL

8597





3/4" (20-27 mm) indoor tap connector.
For taps with 22 mm male or 24 mm female thread.
Complete with adapter.
Quick-Click coupling.
Fully watertight connection.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8597		14	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	1,06	2016

8 000625 085972

SMOOTH TAP CONNECTOR

8525





For taps with round spouts (ext. Ø min. 15 max. 20 mm).
With metal clip to fasten it safely to the tap.
Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8525		10	7,9 x 15,7 x 5	25 x 19 x 10	0,005	0,85	1440

8 000625 085255

KOALA QUICK-CLICK

8583





Square and mixer taps connector ideal to bring water from indoor taps to balconies not provided with any water outlets.
Easy to install and perfectly watertight.
Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8583		8	7,9 x 24 x 5,2	28 x 25 x 13	0,009	1,08	576

8 000625 085835

1" - 3/4" ANGLED TAP CONNECTOR

8592





Tap connector with joint for 1" (26-34 mm) and 3/4" (20-27 mm) threaded taps.
The 180° swivel and 360° rotation prevent the hose from twisting and kinking.
3/4" M threaded outlet and Quick-Click male connector.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8592		8	7,9 x 24 x 4,2	28 x 25 x 13	0,009	0,84	576

8 000625 085927

MENDER 1/2" HOSE

8618

8619





Saves a damaged hose, joining the two pieces obtained once it is cut at the leaking point.
For 1/2" (12,5 mm) hoses.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8618		50	3,5 x 4,8 x 3,5	20 x 39 x 13	0,010	1,37	3600	8 000625 086184
8619		14	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,55	2016	8 000625 086191

MENDER 5/8" HOSE

8562

8563





Saves a damaged hose, joining the two pieces obtained once it is cut at the leaking point.
For 5/8" (15 mm) hoses.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8562		30	7 x 5,4 x 7	10 x 39 x 13	0,005	1,00	3600	8 000625 085620
8563		10	7,9 x 15,7 x 4,2	25 x 19 x 10	0,005	0,48	1440	8 000625 085637

MENDER 3/4" HOSE

8620

8621





Saves a damaged hose, joining the two pieces obtained once it is cut at the leaking point.
For 3/4" (19 mm) hoses.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8620		50	7 x 6 x 7	20 x 39 x 13	0,010	2,10	3600	8 000625 086207
8621		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,56	1440	8 000625 086214



TWO-WAY CONNECTOR

8612

8613





For connecting two hoses in series with Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8612		100	3 x 4 ,9 x 3	20 x 39 x 13	0,010	1,20	7200	8 000625 086122
8613		14	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,36	2016	8 000625 086139

CONNECTOR WITH SHUT-OFF VALVE

8611





Connector with shut-off valve for opening/closing and regulating the water flow.
Easy grip control knob.
Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8611		8	7,9 x 24 x 5,5	28 x 25 x 13	0,009	0,70	576	8 000625 086115

THREE-WAY CONNECTOR

8614

8615





For deviating and splitting up water lines.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8614		40	7,3 x 6,3 x 2	10 x 39 x 13	0,005	0,85	4800	8 000625 086146
8615		12	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,42	1728	8 000625 086153

SPRINKLER CONNECTOR 3/4" M

8636

8637





Connects to Quick-Click system any sprinkler or accessory with 3/4" thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8636		50	3,2 x 4 x 3,2	10 x 39 x 13	0,005	0,62	6000	8 000625 086368
8637		14	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,35	2016	8 000625 086375

O-RING AND WASHER SET

8811





O-rings, 1/2" and 3/4" washers:
- 3 pcs 1/2" washers
- 5 pcs 3/4" washers
- 5 pcs black OR 10,78 x 2,62

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8811		15	7,9 x 15,7 x 1,5	25 x 19 x 10	0,005	0,35	2160	8 000625 088119

9-13 mm AUTOMATIC COUPLING

9025





Automatic coupling for Ø 9-13 mm hose.
Compatible with:
- Spiral Kit (9034) and Spiral Kit Plus (9338)
- Mini-set Balcony (9031) and Utility (9028)
- Starter Garden-Set (9053).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
9025		10	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,50	1440	8 000625 090259

COUPLING WITH SHUT-OFF VALVE

8601





Automatic coupling with shut-off valve, for opening/closing and regulating the water flow.
Easy grip control knob.
Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8601		8	7,9 x 24 x 5,5	28 x 25 x 13	0,009	0,79	576	8 000625 086016

1/2" AUTOMATIC COUPLING

8606

8607





Automatic coupling for 1/2" hoses (Ø 12,5 mm).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8606		50	3,5 x 5,8 x 3,5	20 x 39 x 13	0,010	1,60	3600	8 000625 086061
8607		14	7,9 x 15,7 x 3,7	25 x 19 x 10	0,005	0,62	2016	8 000625 086078

5/8" AUTOMATIC COUPLING

8568

8569





Automatic coupling for 5/8" hoses (Ø 15 mm).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8568		50	3,8 x 6,0 x 3,8	20 x 39 x 13	0,010	1,77	3600	8 000625 085682
8569		12	7,9 x 15,7 x 4,2	25 x 19 x 10	0,005	0,57	1728	8 000625 085699

3/4" AUTOMATIC COUPLING

8608

8609





Automatic coupling for 3/4" hoses (Ø 19 mm).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8608		50	4,2 x 6,6 x 4,2	20 x 39 x 13	0,010	2,03	3600	8 000625 086085
8609		12	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,65	1728	8 000625 086092

9-13 mm AUTOMATIC COUPLING W / AQUASTOP

9026





Automatic coupling with aquastop for Ø 9-13 mm hose.
Compatible with:
- Spiral Kit (9034) and Spiral Kit Plus (9338)
- Mini-Set Balcony (9031) and Utility (9028)
- Starter Garden-Set (9053).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9026		10	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,60	1440

8 000625 090266

1/2" AUTOMATIC COUPLING W / AQUASTOP

8602

8603





Automatic coupling for 1/2" (Ø 12,5 mm) hoses with aquastop valve.
Inserted at the end of the hose, water flow is interrupted by disconnection of male piece.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8602		50	3,5 x 5,8 x 3,5	20 x 39 x 13	0,010	1,71	3600
8603		14	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,62	2016

8 000625 086023

8 000625 086030

5/8" AUTOMATIC COUPLING W / AQUASTOP

8566

8567





Automatic coupling for 5/8" (Ø 15 mm) hoses with aquastop valve.
Inserted at the end of the hose, water flow is interrupted by disconnection of male piece.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8566		50	3,8 x 6,0 x 3,8	20 x 39 x 13	0,010	1,83	3600
8567		12	7,9 x 15,7 x 4,2	25 x 19 x 10	0,005	0,60	1728

8 000625 085668

8 000625 085675

3/4" AUTOMATIC COUPLING W / AQUASTOP

8604

8605





Automatic coupling for 3/4" (Ø 19 mm) hoses with aquastop valve.
Inserted at the end of the hose, water flow is interrupted by disconnection of male piece.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8604		50	4,2 x 6,6 x 4,2	20 x 39 x 13	0,010	2,14	3600
8605		12	7,9 x 15,7 x 4,2	25 x 19 x 10	0,005	0,70	1728

8 000625 086047

8 000625 086054

TAP CONNECTOR AND 1/2" COUPLING SET

8813





Set with tap connector 3/4" (20-27 mm) and reducer 1/2" (15-21 mm), 1/2" automatic coupling.


code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8813		10	7,9 x 15,7 x 3,8	25 x 19 x 10	0,005	0,65	1440

8 000625 088133

1/2" HOSE CONNECTION SET

8818





For connecting two hoses in series.
It contains: two ways connector, 1/2" automatic couplings, with and without aquastop.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8818		8	15,4 x 24 x 3,8	28 x 25 x 19	0,013	1,00	384

8 000625 088188

ERGOGRIP® SYSTEM

The Ergogrip System tap connectors and automatic couplings are the result of Claber research: offering the very best when it comes to harmonious lines, ergonomics and ease of use, thanks to the rubber surface which always ensures a perfect grip. Ergogrip System meet any connection requirement for hoses with different diameters, and the standard pitch makes it compatible with tap connectors and automatic couplings used around the world. The spring inside the couplings withstands up to 1.5 million clicks without breaking, and is not damaged by water. The perfect solution for those with the most demanding needs. Ideal for use with Confort pistols.

TAP CONNECTOR 1/2" (15-21 mm) - 3/4" (20-27 mm)

8556

8557





Universal tap connector with 1/2" (15-21 mm) and 3/4" (20-27 mm) thread with gaskets for a perfectly watertight seal.
Male connector for connecting all automatic couplings.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8556		50	3,9 x 4,8 x 3,9	10 x 39 x 13	0,005	1,00	6000	8 000625 085569
8557		12	7,9 x 15,7 x 4,2	25 x 19 x 10	0,005	0,39	1728	8 000625 085576

TAP CONNECTOR 3/4" (20-27 mm) - 1" (26-34 mm)

8558

8559





Universal tap connector with 3/4" (20-27 mm) and 1" (26-34 mm) thread with gaskets for a perfectly watertight seal.
Male connector for connecting all automatic couplings.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8558		40	8 x 4,75 x 8	10 x 39 x 13	0,005	0,97	4800	8 000625 085583
8559		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,39	1440	8 000625 085590

MENDER 1/2"

8560

8561





For repairing a damaged garden hose or for connecting two coils of hose of the same diameter.
For hoses with 1/2" (12,5 mm) diameter.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8560		30	3,6 x 5,6 x 3,6	10 x 39 x 13	0,005	0,93	3600	8 000625 085606
8561		12	7,9 x 15,7 x 4,2	25 x 19 x 10	0,005	0,51	1728	8 000625 085613

UNIVERSAL MENDER 1/2" - 5/8" - 3/4"

8564

8565





For repairing a damaged garden hose or for connecting two coils of hose, even with different diameters.
For hoses with 1/2" - 5/8" - 3/4" diameter.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8564		40	7,2 x 4,3 x 8	20 x 39 x 13	0,010	2,00	2880	8 000625 085644
8565		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,62	1440	8 000625 085651

COUPLING 1/2" - 5/8"

8542

8543





Ergogrip automatic coupling for hoses with 1/2" (12,5mm) - 5/8" (15 mm) diameter.
Special rubber-covered surface for a perfect grip.
Rustproof (no metal parts) and shockproof, it is resistant to the elements, UV rays and very high pressures.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8542		50	8 x 6 x 8	20 x 39 x 13	0,010	1,82	3600	8 000625 085422
8543		12	7,9 x 15,7 x 4,2	25 x 19 x 10	0,005	0,57	1728	8 000625 085439

UNIVERSAL COUPLING 1/2" - 5/8" - 3/4"

8546

8547





Ergogrip Universal automatic coupling for hoses with 1/2" (12,5 mm) - 5/8" (15 mm) - 3/4" (19 mm) diameter.
Special rubber-covered surface for a perfect grip.
Rustproof (no metal parts) and shockproof, it is resistant to the elements, UV rays and very high pressures.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8546		40	8 x 6,8 x 8	20 x 39 x 13	0,010	1,82	2880	8 000625 085460
8547		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,57	1440	8 000625 085477

COUPLING 1/2" - 5/8" W/AQUASTOP

8544

8545





Ergogrip automatic coupling for hoses with 1/2" (12,5 mm) - 5/8" (15 mm) diameter.
Special rubber-covered surface for a perfect grip. Rustproof (no metal parts) and shockproof, it is resistant to the elements, UV rays and very high pressures.
Features automatic water shut-off valve - inserted at the end of the hose, water flow is interrupted by disconnection of the watering accessory.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8544		25	8 x 6 x 8	10 x 39 x 13	0,005	0,95	3000	8 000625 085446
8545		12	7,9 x 15,7 x 4,2	25 x 19 x 10	0,005	0,58	1728	8 000625 085453

UNIVERSAL COUPLING 1/2" - 5/8" - 3/4" W/AQUASTOP

8548

8549





Ergogrip Universal automatic coupling for hoses with 1/2" (12,5 mm) - 5/8" (15 mm) - 3/4" (19 -mm) diameter.
Special rubber-covered surface for a perfect grip. Rustproof (no metal parts) and shockproof, it is resistant to the elements, UV rays and very high pressures.
Features automatic water shut-off valve - inserted at the end of the hose, water flow is interrupted by disconnection of the watering accessory.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8548		20	8 x 6,8 x 8	10 x 39 x 13	0,005	0,98	2400	8 000625 085484
8549		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,58	1440	8 000625 085491



SPRAY NOZZLES AND PISTOLS

These Claber spray nozzles and pistols are ergonomic and practical to use, and the product line is constantly being developed. The unique design of the Pro and Plus spray nozzles means you can adjust the jet with one hand, and the ergonomic grip on the Ergo pistols is comfortable and easy to hold. The Elegant line allows you to water small green spaces consuming less water, with jets designed to prevent water or soil splashes. For those who settle for nothing but the best, there's the Confort line: a rubber grip for perfect hold, even with wet hands; a practical button for turning the water flow on or off using your finger; and a valve at the back for adjusting the flow rate. A rubber-coated cap and ring nut are also included, and there are models available in metal for the utmost sturdiness.

ELEGANT LINE

Practical is stylish





CONFORT PISTOLS

Top-class ergonomics





PRECISION CONFORT

9561





Spray pistol with anatomical rubber grip and convenient front on-off flow button.
Knob at rear adjusts strength of water jet.
Cap with rubber lining for protection against impact.
Water flow can be adjusted as required, from completely closed (jet) to completely open (fan spray).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9561		3	18 x 24,5 x 40	25 x 19 x 10	0,005	0,75	432

8 000625 095612

METAL - JET CONFORT

9567





Spray pistol with resistant, inalterable chrome metal components, anatomical rubber grip and convenient front on-off flow mechanism.
Metal knob at rear adjusts strength of water jet.
Pistol body is rubber lined for protection against impact.
Water flow can be adjusted as required, from completely closed (jet) to completely open (fan spray).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9567		3	17,7 x 24 x 4,5	25 x 19 x 10	0,005	0,82	432

8 000625 095674

BALCONY CONFORT

9565





Shower pistol with aerator, anatomical rubber grip and convenient front on-off flow button.
Knob at rear adjusts strength of water jet.
Rubber lined lock nut for protection against impact, for easy opening, inspection and cleaning of pistol. The aerator (also removable for easy cleaning) assures a gentle jet of water mixed with bubbles, ideal for watering potted plants.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9565		3	17 x 24,5 x 6,4	25 x 28 x 13	0,009	0,91	216

8 000625 095650

MULTI - JET CONFORT

9563





Multifunction pistol with anatomical rubber grip and convenient front on-off flow button.
Knob at rear adjusts strength of water jet.
Rubber lined lock nut for protection against impact, for easy opening, inspection and cleaning of pistol.
Rotate the nut for four different patterns: shower, jet, fan spray and mist.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9563		3	17 x 24,5 x 6,4	25 x 28 x 13	0,009	0,90	216

8 000625 095636





SPRAY PISTOL

8966

8756





Spray pistol with lever adjustment of water flow and blocking device for desired jet.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8966		16	10 x 16 x 2	20 x 39 x 13	0,010	1,75	1152	8 000625 089666
8756		5	14 x 21,5 x 3,5	25 x 19 x 10	0,005	0,61	720	8 000625 087563

ERGO SPRAY PISTOL

8538

8539





Spray pistol with practical ergonomic grip.
Water flow adjustment lever.
Dual pattern: from closed to open (jet or fan spray) and lock of required jet.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8538		15	15,5 x 14,2 x 4	20 x 39 x 13	0,010	2,16	1080	8 000625 085385
8539		10	15,5 x 20,5 x 4	28 x 25 x 13	0,009	1,50	720	8 000625 085392

STARTER SET 1/2"

8551





Containing:
- tap connector 3/4" (20-27 mm) and reducer 1/2" (15-21 mm),
- 1/2" automatic couplings with and without aquastop,
- Ergo spray pistol, with two spray patterns, jet or fan spray.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8551		6	16 x 24 x 5	28 x 25 x 19	0,013	1,70	288	8 000625 085514

ERGO SHOWER PISTOL

8541





Spray pistol with practical ergonomic grip.
Shower jet open and fine spray.
Water flow adjustment lever.
Jet lock device, stainless steel perforated disk.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8541		4	17,5 x 21 x 6	25 x 19 x 10	0,005	0,74	576

8 000625 085415

GARDEN SPRAY PISTOL

9373





The multifunction Garden spray pistol allows to water the garden with a wider range of flows: from jet to soft fan, wise, gentle mist, shower spray, soaker.
Fingertip pressure control water button.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9373		5	12 x 18 x 7	28 x 25 x 13	0,009	0,90	360

8 000625 093731

ERGO-GARDEN SPRAY PISTOL

9391





Multi-Jet spray pistol with practical ergonomic grip.
Rotate the pistol head for four different patterns: from jet to soft fan wise, gentle soaker, shower and aerator spray (jet mixed with air bubbles).
Very useful for watering potted plants.
Selector device and lock for required jet.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9391		8	15,5 x 21 x 7,85	28 x 25 x 13	0,009	1,60	576

8 000625 093915

FAN SPRAY

8917





Fine, soft, gentle spray.
Non slip handle grip with regulating valve on handle.
Rustproof metal shower head plate.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8917		4	7,9 x 24 x 6	28 x 25 x 13	0,009	0,56	288

8 000625 089178

LONG FAN SPRAY

8922





Fine, soft, gentle spray, non slip handle grip with regulating valve on handle.
Rustproof metal shower head plate.
With aluminium long reach handle (60 cm).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8922		2	16 x 69 x 6	20 x 77 x 10	0,012	0,74	96

8 000625 089222

ELEGANT DUAL JET PISTOL

9081





Lightweight and compact pistol with dual jet: concentrated or fan spray.
Ideal both for watering plants and for cleaning tasks.
Ergonomic grip.
Handy front-mounted push-button mechanism for controlling and shutting off the water flow.
2 flow settings.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
9081		4	15 x 19,5 x 3	25 x 19 x 10	0,005	0,50	576

8 000625 090815

ELEGANT MULTIFUNCTION NOZZLE 5 JETS

9089





Lightweight and compact multifunction spray nozzle.
Turn the head for 5 different patterns: shower, jet, mist, cone and flat (+ 1 OFF).
Quick-Click connection.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
9089		6	7,9 x 15,7 x 7,5	25 x 19 x 10	0,005	0,50	864

8 000625 090891

ELEGANT MULTIFUNCTION PISTOL

9083





Lightweight and compact multifunction pistol with aerator.
Ergonomic grip.
Handy front-mounted push-button mechanism for controlling and shutting off the water flow.
2 flow settings.
Turn the pistol head to get 4 different patterns: shower, jet, aerated, mist.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
9083		4	16 x 20 x 6	25 x 19 x 10	0,005	0,60	576

8 000625 090839

ELEGANT MULTIFUNCTION PISTOL 5 JETS

9088





Lightweight, compact multifunction pistol. Ergonomic grip.
Handy front-mounted push-button for controlling and shutting off the water flow.
2 flow settings.
Turn the pistol head for 5 different patterns: shower, jet, mist, cone and flat.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
9088		4	15,5 x 20 x 6	25 x 19 x 10	0,005	0,55	576

8 000625 090884

ELEGANT TELESCOPIC MULTIFUNCTION LANCE

9086





Multifunction spray lance with telescopic rod. Ergonomic horizontal grip with shallow-angled outlet. Rustproof aluminium telescopic long reach handle. Length: 70 - 105 cm.
Handy front-mounted push-button mechanism for controlling and shutting off the water flow.
2 flow settings.
Swivel spray head with 4 different patterns: shower, jet, aerated, mist.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
9086		2	12 x 68,5 x 6	20 x 77 x 10	0,015	1,07	96

8 000625 090860

JET SPRAY NOZZLE

8616

8617





Spray nozzle with adjustable flow pattern, from jet to wide cone spray.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8616		50	3,45 x 11,7 x 3,45	20 x 39 x 13	0,010	1,80	3600	8 000625 086160
8617		8	7,9 x 24 x 3,6	28 x 25 x 13	0,009	0,52	576	8 000625 086177

NOZZLE AND COUPLING SET

8800





Set with jet spray nozzle and 1/2" automatic coupling with aquastop.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8800		10	15,4 x 24 x 4,5	28 x 25 x 19	0,013	1,18	480	8 000625 088003

STARTER SET

8802 - Ø 1/2"

8827 - Ø 3/4"





8802 contains: tap connector 3/4" (20-27 mm) and reducer 1/2" (15-21 mm), 1/2" automatic couplings with and without aquastop, jet spray nozzle.

8827 contains: tap connector 3/4" (20-27 mm) and reducer 1/2" (15-21 mm), 3/4" automatic couplings with and without aquastop, jet spray nozzle.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8802		8	15,4 x 24 x 4,5	28 x 25 x 19	0,013	1,34	384	8 000625 088027
8827		8	15,4 x 24 x 4,5	28 x 25 x 19	0,013	1,44	384	8 000625 088270

PRO SPRAY NOZZLE

8534

8535





Nozzle with adjustable pattern: from (jet to wide cone spray), by rotating the ergonomic cap of the nozzle.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8534		15	4 x 17,5 x 4	10 x 39 x 13	0,005	1,21	1800	8 000625 085347
8535		5	7,9 x 24 x 3,7	25 x 19 x 10	0,005	0,52	720	8 000625 085354

PLUS SPRAY NOZZLE

8536

8537





Nozzle with adjustable pattern: (jet to wide cone spray).
Water flow regulation by turning the knob valve.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
8536		15	4 x 17,9 x 4	10 x 39 x 13	0,005	1,32	1800	8 000625 085361
8537		5	7,9 x 24 x 4,2	25 x 19 x 10	0,005	0,56	720	8 000625 085378

AQUAMASTER

The main feature of the new range of Aquamaster connectors and accessories is their distinctive large diameter. Designed for 3/4" and 1" hoses, they ensure that more water can pass through, supporting high pressures.
Ideal for professional applications such as agriculture and construction, the Aquamaster range is often the best solution in the garden, too: from its use with suction pumps to hoses of a longer length.
It offers a high flow rate and a tight seal, thanks to the Safety-Lock rapid coupling technology.



AQUAMASTER

High flow rate and tight seal

CREATED FOR
LARGE DIAMETER HOSES

HIGH FLOW RATE
TESTED UP TO 10 BARS



INNOVATIVE SAFETY-LOCK
TECHNOLOGY

TIGHT SEAL
AND EASY COUPLING



1" - 3/4" MAX-FLOW TAP CONNECTOR

9641





Multi-threaded tap connector to attach a line with Max-Flow couplings to the tap.
It is complete of washer. Female 1" (26 - 34 mm) thread and 3/4" (20 - 27 mm) adaptor.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9641		8	7,9 x 15,7 x 4,2	25 x 19 x 10	0,005	0,43	1152

8 000625 096411

1"1/4 - 1" MAX-FLOW TAP CONNECTOR

9655





Multi-threaded tap connector to attach a line with Max-Flow couplings to the tap.
Complete with washer.
Female 1" 1/4 (33-42 mm) thread and 1" (26-34 mm) adaptor.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9655		6	7,9 x 15,7 x 5,8	25 x 19 x 10	0,005	0,48	864

8 000625 096558

3/4" M THREADED MAX-FLOW ADAPTOR

9642





Threaded connector for fitting any accessory with a F 3/4" (20-27 mm) thread to the Max-Flow system.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9642		10	7,9 x 15,7 x 2,8	25 x 19 x 10	0,005	0,36	1140

8 000625 096428

1" M THREADED MAX-FLOW ADAPTOR

9654





Threaded connector for fitting any accessory with a F 1" (26-34 mm) thread to the Max-Flow system.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9654		10	7,9 x 15,7 x3,6	25 x 19 x 10	0,005	0,44	1440

8 000625 096541



2-WAY MAX-FLOW CONNECTOR

9643





Connector for joining together in series two hoses with Max-Flow couplings installed on the ends.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9643		10	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,41	1140	8 000625 096435

2-WAY CONNECTOR MAX-FLOW TO STANDARD

9644





Connector for joining together in series two hoses with a Max-Flow coupling and a Quick-Click automatic coupling installed respectively on the ends.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9644		10	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,37	1140	8 000625 096442

3-WAY MAX-FLOW CONNECTOR

9645





Three-way connector splitting the irrigation line and directing the water to two different points. Connect three lengths of hose with Max-Flow couplings on the ends.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9645		10	7,9 x 15,7 x 2,6	25 x 19 x 10	0,005	0,61	1140	8 000625 096459

3-WAY CONNECTOR MAX-FLOW TO STANDARD

9646





Three-way connector splitting the irrigation line and directing the water to two different points. Connect one length of hose with a Max-Flow coupling to two lengths of hose with Quick-Click automatic couplings.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9646		10	7,9 x 15,7 x 2,6	25 x 19 x 10	0,005	0,46	1140	8 000625 096466

MAX-FLOW O-RING AND WASHERS SET

9657





Spare o-rings, 1" and 3/4" washers for products in the Max-Flow range.
It includes:
- 3 Max-Flow O-rings,
- 2 standard O-rings,
- 1 x 1" (26-34 mm) washer,
- 1 x 3/4" (20-27 mm) washer.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9657		10	7,9 x 15,7 x 1,0	25 x 19 x 10	0,005	0,16	1440	8 000625 096572

3/4" MAX-FLOW COUPLING

9647





Max-Flow coupling for 3/4" (19 mm) hoses.
A perfectly watertight connection and seal with Safety Lock.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9647		8	7,9 x 15,7 x 2,6	25 x 19 x 10	0,005	0,58	1152

8 000625 096473

1" MAX-FLOW COUPLING

9650





Max-Flow coupling for 1" (25 mm) hoses.
A perfectly watertight connection and seal with Safety Lock.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9650		6	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,55	864

8 000625 096503

3/4" MAX-FLOW MENDER

9648





A mender to save a damaged hose: cut the hose at the point where the leak is and use it to join the two lengths together. For 3/4" (19 mm) hoses.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9648		8	7,9 x 15,7 x 4,3	25 x 19 x 10	0,005	0,57	1152

8 000625 096480

3/4" - 1" MAX-FLOW MENDER

9649





A mender for joining together two hoses, one with a diameter of 3/4" (19 mm) and one 1" (25 mm), without needing any other accessories.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9649		6	7,9 x 15,7 x 5,3	25 x 19 x 10	0,005	0,57	864

8 000625 096497

1" MAX-FLOW MENDER

9651





A mender to save a damaged hose: cut the hose at the point where the leak is and use it to join the two lengths together. For 1" (25 mm) hoses.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9651		6	7,9 x 15,7 x 5,3	25 x 19 x 10	0,005	0,65	864

8 000625 096510

ABOVE-GROUND

MAX-FLOW ADJUSTABLE NOZZLE

9652





Nozzle with adjustable pattern, from jet to wide cone spray.
For use with Max-Flow couplings.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9652		6	7,9 x 24 x 4,2	28 x 25 x 13	0,009	0,70	432	8 000625 096527

NEW FOR 2024

MAX-FLOW STARTER KIT 3/4" (19 mm)

9656





Max-Flow accessories kit for 3/4" (19 mm) hose.
The kit includes: 1" (26-34 mm) tap connector with 1" - 3/4" (20-27 mm) adapter, 3/4" (19 mm) couplings and spray nozzle.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9656		5	15,4 x 24 x 4,5	28 x 25 x 19	0,013	1,30	240	8 000625 096565

			
CODE	**8609**	**9647**	
DESCRIPTION	**3/4" AUTOMATIC COUPLING**	**3/4" MAX FLOW COUPLING**	
Flow rate (l/min)	1 bar	36	75
	2 bar	57	107
	3 bar	73	112
	4 bar	85	125

					
CODE	**8617**		**9652**		
DESCRIPTION	**JET SPRAY NOZZLE**		**MAX FLOW ADJUSTABLE NOZZLE**		
Pattern					
Flow rate (l/min)	1 bar	7	8	11	17
	2 bar	8	13	21	26
	3 bar	9	15	25	34
	4 bar	11	19	29	40




COMPACT AND FUNCTIONAL, IT ALLOWS YOU TO EASILY ADJUST THE JET ACCORDING TO USAGE REQUIREMENTS.

NEW FOR 2024

ABOVE-GROUND

MASTER PRO NOZZLE

9658







Multijet spray nozzle ensuring a high volume of water.
Rustproof metal shower head plate.
Turn the head for 3 different patterns: jet, shower, mist.
For use with Max-Flow couplings.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9658		3	15,4 x 24 x 9	28 x 25 x 19	0,013	1,12	144	8 000625 096589

THREE DIFFERENT JETS
FOR ALL USES:
SHOWER, MIST AND JET.





METAL-JET

This comprehensive range offers the best in quality, made from chrome-plated brass, with lots of details that really make a difference. Brass guarantees high resistance and durability and the chrome-plating preserves the shine of the products over time, avoiding oxidation. Claber's Metal-Jet range is composed of a variety of products – tap connectors, automatic couplings, connectors, flow diverters, spray nozzles and pistols – all with Quick-Click couplings, making them compatible with plastic automatic couplings too. Metal-Jet connectors also have 6 internal spheres to guarantee automatic connection and a perfect seal. The screw collar with an exclusive Claber design profile distinguishes the product and improves the grip. The adjustable multipurpose pistols combine robust metal parts with an ergonomic plastic grip, helping you to select the best jet for all of your gardening needs.





MULTIPURPOSE PISTOL

new style in the garden

NEW FOR 2024

1/2" METAL OUTDOOR TAP

9624





Chrome-plated brass outdoor tap with 1/2" M (15-21 mm) inlet.
Adjustment lever with rubber grip for easy hold even with wet hands. 3/4" M (20-27 mm) threaded outlet with removable Quick-Click fitting.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9624		5	14,5 x 12 x 3	22,5 x 15,5 x 13,3	0,005	1,45	500	8 000625 096244

NEW FOR 2024

1/2" METAL OUTDOOR TAP WITH DOUBLE OUTLET

9625





Chrome-plated brass outdoor tap with 1/2" M (15-21 mm) inlet.
Adjustment lever with rubber grip for easy hold even with wet hands. 3/4" M (20-27 mm) threaded outlet with removable Quick-Click fitting. Features a second outlet with 3/4" (20-27 mm) thread and independent adjustment knob for using a second line.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9625		5	16 x 12 x 5,3	22,5 x 15,5 x 13,3	0,005	2,14	500	8 000625 096251

3/4" M (20-27 mm) THREADED ADJUSTABLE TWO-WAY ADAPTER

9601





Adjustable two-way adapter, 3/4" (20-27 mm) thread, in chrome-plated brass.
Secure fit on taps with 3/4" (20-27 mm) thread.
Independent water flow adjustment on the two lines.
Used to install two electronic timers, pressure reducers, etc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9601		4	14,5 x 12 x 5	22,5 x 15,5 x 13,3	0,005	1,97	400	8 000625 096015

ADJUSTABLE TWO-WAY TAP CONNECTOR

9602





Two-way connector in chrome-plated brass.
Used to connect up two lines fitted with Quick-Click automatic couplings to just one water outlet.
Independent water flow adjustment on the two lines.
Secure fit on taps with 3/4" (20-27 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9602		4	14,5 x 12 x 5	22,5 x 15,5 x 13,3	0,005	1,53	400	8 000625 096022

1" (26-34 mm) TAP CONNECTOR WITH 3/4" (20-27 mm) ADAPTER

9603





Tap connector in chrome-plated brass.
For connecting automatic couplings to the tap.
Female 1" (26-34 mm) thread and 3/4" (20-27 mm) adapter.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9603		10	7 x 12 x 3	19,5 x 19,3 x 8,5	0,003	1,14	1440	8 000625 096039

3/4" (20-27 mm) TAP CONNECTOR

9604





Tap connector in chrome-plated brass.
For connecting automatic couplings to the tap.
Female 3/4" (20-27 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9604		10	7 x 12 x 3,6	19 x 16 x 9,3	0,003	0,64	1800	8 000625 096046

1/2" (15-21 mm) TAP CONNECTOR

9605





Chrome-plated brass tap connector.
For connecting automatic couplings to the tap.
Female 1/2" (15 - 21 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9605		10	7 x 12 x 2,4	19 x 12,8 x 8,5	0,002	0,54	2160	8 000625 096053

TWO-WAY CONNECTOR

9606





Two-way connector in chrome-plated brass.
Connects two hoses with automatic couplings in series.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9606		10	7 x 12 x 2	19 x 12,8 x 8,5	0,002	0,70	2160	8 000625 096060

THREE-WAY CONNECTOR

9607





Three-way connector in chrome-plated brass.
Splits the irrigation line into two different directions.
Connects three hoses with automatic couplings.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9607		8	7 x 12 x 1,9	19 x 12,8 x 8,5	0,002	1,16	1728	8 000625 096077

1/2" M (15 - 21 mm) CONNECTOR

9608





Chrome-plated brass connector with 1/2" (15 - 21 mm) male thread.
For connecting any sprinkler or accessory with 1/2" female thread to the Quick-Click system at the water inlet.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9608		10	7 x 12 x 2,6	19 x 12,8 x 8,5	0,002	0,55	2160	8 000625 096084

3/4" M (20 - 27 mm) CONNECTOR

9609





Chrome-plated brass connector with 3/4" (20 - 27 mm) male thread.
For connecting any sprinkler or accessory with 3/4" female thread to the Quick-Click system at the water inlet.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9609		10	7 x 12 x 2,8	19 x 12,8 x 8,5	0,002	0,62	2160	8 000625 096091





1/2"-5/8" AUTOMATIC COUPLING

9610





Automatic coupling for 1/2" (12,5 mm) - 5/8" (15 mm) diameter hoses in chrome-plated brass.
Equipped with 6 internal bearings to guarantee automatic connection and perfect seal.
The tightening ring nut with an exclusive Claber design profile distinguishes the product and improves grip.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9610		8	7 x 12 x 3	19 x 16 x 9,3	0,003	0,92	1440	8 000625 096107

1/2"-5/8" AUTOMATIC COUPLING W/STOP

9611





Automatic coupling for 1/2" (12,5 mm) - 5/8" (15 mm) diameter hoses in chrome-plated brass.
Provided with an automatic water stop valve. Fits onto the end of the hose.
Water flow is interrupted by disconnection of the watering accessory.
Equipped with 6 internal bearings to guarantee automatic connection and perfect seal.
The tightening ring nut with an exclusive Claber design profile distinguishes the product and improves grip.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9611		8	7 x 12 x 3	19,5 x 19,3 x 8,5	0,003	0,93	1440	8 000625 096114

3/4" AUTOMATIC COUPLING

9613





Automatic coupling for 3/4" (19 mm) diameter hoses in chrome-plated brass.
Equipped with 6 internal bearings to guarantee automatic connection and perfect seal.
The tightening ring nut with an exclusive Claber design profile distinguishes the product and improves the grip.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9613		8	7 x 12 x 4,5	19,5 x 19,3 x 8,5	0,003	1,15	1152	8 000625 096138

3/4" AUTOMATIC COUPLING W/STOP

9614





Automatic coupling for 3/4" (19 mm) diameter hoses in chrome-plated brass.
Provided with an automatic water stop valve. Fits onto the end of the hose.
Water flow is interrupted by disconnection of the watering accessory.
Equipped with 6 internal bearings to guarantee automatic connection and perfect seal.
The tightening ring nut with an exclusive Claber design profile distinguishes the product and improves the grip.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9614		8	7 x 12 x 4,5	19,5 x 19,3 x 8,5	0,003	1,18	1152	8 000625 096145

1/2"-5/8" MENDER

9612





Mender for 1/2" (12,5 mm) - 5/8" (15 mm) diameter hoses in chrome-plated brass.
Repair a damaged hose: cut the hose at the point where the leak is and use it to join the two sections together.
The tightening ring nut with an exclusive Claber design profile distinguishes the product and improves the grip.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9612		8	7 x 12 x 3,3	19 x 16 x 9,3	0,003	0,74	1440	8 000625 096121

3/4" MENDER

9615






Mender for 3/4" (19 mm) diameter hoses in chrome-plated brass.
Repair a damaged hose: cut the hose at the point where the leak is and use it to join the two hose lengths together.
The tightening ring nut with an exclusive Claber design profile distinguishes the product and improves the grip.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9615		8	7 x 12 x 4	19,5 x 19,3 x 8,5	0,003	1,16	1152	8 000625 096152

SPRAY NOZZLE WITH ADJUSTABLE JET

9620






Spray nozzle with adjustable pattern: from fully open to fully closed (mist or jet). Made from chrome-plated brass. Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9620		8	14,5 x 12 x 2,8	22,5 x 15,5 x 13,3	0,005	1,20	800

8 000625 096206

BASIC METAL PISTOL

9619





Chrome-plated metal spray pistol. Flow adjustment lever and exclusive device for selecting and fixing the desired jet. Quick-Click coupling.


code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9619		5	14,5 x 20 x 3,1	19 x 16,5 x 24,5	0,008	1,20	280

8 000625 096190

NEW FOR 2024

BASIC METAL MULTIFUNCTION PISTOL

9618






Multifunction pistol in chrome-plated metal. Flow adjustment lever and lock for desired jet. Turn the ring nut for 7 different patterns (shower, jet, mist, gentle soaker, fan, flat, cone). Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9618		4	14,5 x 21,5 x 5,7	19 x 16,5 x 24,5	0,008	1,32	224

8 000625 096183

SPRAY PISTOL

9621






Spray pistol in chrome-plated metal. Rubber ergonomic grip. Water flow adjustment lever and lock for desired jet. Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9621		4	14,5 x 18 x 3,5	19 x 16,5 x 24,5	0,008	1,40	224

8 000625 096213

8 PATTERNS MULTIFUNCTION PISTOL

9622





Multifunction pistol in chrome-plated metal. Rubber ergonomic grip. Water flow adjustment lever and lock for desired jet. Turn the ring nut for 8 different spray patterns. Quick-Click coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9622		4	14,5 x 21 x 6	19 x 16,5 x 24,5	0,008	1,5	224

8 000625 096220

NEW FOR 2024

METAL-JET TELESCOPIC MULTIFUNCTION LANCE

9626





Multijet spray nozzle with chrome metal long reach handle (length: 70 cm).
Rubber ergonomic grip.
Rustproof metal shower head plate. Water flow adjustment lever and lock for the jet.
Turn the ring nut for 4 different spray patterns: shower, jet, aerated, mist.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9626		2	14,5 x 7 x 76	77 x 10 x 20	0,012	1,45	96

8 000625 096268

IMPACT METAL-JET SPIKE

9623





Chrome-plated metal pulsating sprinkler for 0° to 350° sector irrigation or 360° continuous rotation. Mounted on a metal spike for fixing securely into the ground.
Provided with diffuser screw for uniform irrigation and deflector to lower the height of the jet if necessary.
Option to connect two sprinklers in line (using the 3/4" threaded outlet).
Operating pressure 1-3 bar.
Maximum irrigated area 500 m^2.

Bar	m^2	Ø m	l / min
1,0	255	18	8
2,0	415	23	11
3,0	500	25	16

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
9623		3	14,5 x 31 x 6	32 x 11 x 18	0,006	1,20	210

8 000625 096237



COMPLETE WITH ACCESSORIES FOR EVERY TYPE OF CONNECTION AND USE, THE METAL-JET RANGE IS THE BEST CHOICE FOR THOSE LOOKING FOR DURABILITY AND STRENGTH.



PERFECT STABILITY THANKS TO THE METAL SPIKE

OSCILLATING SPRINKLERS

The Compact line is the ideal choice for watering your lawn, as it has an adjustable jet that simulates light rain.
The elegant design of the outer casing in ABS, a sturdy turbine engine and resistant gears make this line one of Claber's most successful. Thanks to the special Aqua Control system, it could not be any easier to adjust the coverage of the area you want to water with just 2 fingers!





WIDE-REACHING, UNIFORM JET
LIKE LIGHT RAIN



COMPACT

Precise and gentle

LIGHTWEIGHT, RESISTANT AND
RUSTPROOF MATERIALS

TURBINE ENGINE
FOR HIGH PERFORMANCE

COMPACT-160 PROMO

8740





Oscillating sprinkler, 14 precision punched water holes providing uniform distribution with natural rain effect.
Control knob for selection of 4 main spray patterns with many intermediate steps.
Irrigated area max 180 m².

Bar	m²	m	l / min
1	78	11,0 x 7,0	8,0
2	133	14,0 x 10,0	11,0
3	165	16,0 x 11,0	13,0
4	181	16,0 x 11,0	15,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8740		4	41 x 10 x 15,5	46,2 x 26,2 x 17	0,021	1,66	140

8 000625 087402

COMPACT-12

8748





Oscillating arm in ABS, available with 12 holes, this model is supplied complete with hydraulic motor and self-lubrificating nonwearing acetal resin gears.
The new large-diameter turbine offers high performance even at low pressure, while the new watering selection device, comprising a pratical click-operated selector provides 5 different water settings.
A sled in aluminium sections (Ø 10 mm) ensures excellent stability and easy trailing.
Irrigated area max 190 m².

Bar	m²	m	l / min
1	98	11,5 x 8,5	9,1
2	169	14,5 x 11,5	12,4
3	192	17,5 x 11,0	14,1
4	165	16,5 x 10,0	15,7

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8748		3	32 x 8,5 x 19	20 x 30 x 33	0,019	1,86	144

8 000625 087488

COMPACT-20 AQUA CONTROL

8753





The oscillating arm in ABS complete with the exclusive "Aqua Control" system allows to vary coverage of the irrigated area as required. Available with 20 holes and 8 adjustable nozzles (complete with knurled end for secure connection), this model is supplied complete with hydraulic motor and self -lubrificating non-wearing acetal resin gears. The new large-diameter turbine offers high performance even at low pressure, while the new watering selection device, comprising a pratical click-operated selector provides 5 different water settings. A sled in aluminium sections (Ø 10 mm) ensures excellent stability and easy trailing. Irrigated area max 320 m².

Bar	m²	m	l / min
1	100	10,5 x 9,5	10,5
2	215	16,0 x 13,4	15,5
3	305	18,8 x 16,2	19,0
4	320	19,2 x 16,7	21,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8753		3	32 x 8,5 x 19	20 x 30 x 33	0,019	1,87	144

8 000625 087532

COMPACT-16 SUPER METAL

8743





The oscillating aluminium arm with 16 brass nozzles guarantees regular water jet operation.
The large sized sturdy ABS body houses the hydraulic motor which may be opened for inspection while the large-section aluminium elements (Ø 15 mm), which comprise the sled base, guarantee excellent stability and easy trailing.
Irrigated area max 290 m².

Bar	m²	m	l / min
1	83	10,1 x 8,2	11,8
2	202	16,4 x 12,3	18,0
3	269	19,2 x 14,0	21,5
4	290	19,9 x 14,6	25,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8743		3	43 x 9 x 22,5	25 x 30 x 45	0,034	2,48	72

8 000625 087433

STATIC AND ROTATING SPRINKLERS

Claber static and rotating sprinklers offer you all of this: a great look, ease of use, versatile features and a vast range of solutions to meet different needs. From compact models, easy to move across the lawn, to models on spike to be firmly anchored into the ground, without damaging your grass.
Watering is always even and just like natural rainfall, even at low water pressure.



MULTIFUNCTION SPRINKLER

8654





Made entirely in ABS.
Special round shape allows easy dragging over lawns, between flower beds and plants. Shaped upper section for easily lifting.
Flange rotates to provide 6 different patterns.
Irrigated area max 64 m².

Bar	m²	Ø m	l / min
1	36	6,0	17,5
2	64	8,0	24,7
3	64	8,0	30,3
4	64	8,0	34,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8654		3	24 x 19 x 7,7	25 x 26 x 23	0,015	1,15	135

8 000625 086542

ROLLINA

8656





New compact, contoured design for easy movement over lawns.
The new 5-blade rotor intercepts the water jets to create a fine natural rain effect.
Irrigated area max 20 m².

Bar	m²	Ø m	l / min
1	13	4,0	18,0
2	16	4,5	25,0
3	20	5,0	30,0
4	20	5,0	35,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8656		5	15,4 x 24 x 7	28 x 25 x 19	0,013	0,97	240

8 000625 086566

TURBOSPRUZZO

8658





New compact, contoured design for easy movement over lawns.
Stationary sprinkler produces a fine spray for watering circular areas.
Irrigated area max 63 m².

Bar	m²	Ø m	l / min
1	58	9,0	18,0
2	63	9,0	24,0
3	57	8,0	27,0
4	47	8,0	30,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8658		6	15,4 x 24 x 6,5	28 x 25 x 19	0,013	1,08	288

8 000625 086580

TURBOSPIKE

8660





Stationary sprinkler on plastic spike with natural rain effect in circle pattern.
Irrigated area max 40 m².

Bar	m²	Ø m	l / min
1	30	6,0	7,8
2	30	6,0	10,7
3	40	7,0	12,9
4	40	7,0	14,8

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8660		12	7,9 x 24 x 3,8	28 x 25 x 19	0,013	0,98	576

8 000625 086603





IDROSPRAY 2000

8675





Rotating 2-arm sprinkler constructed entirely in ABS. Special rounded design enables easy movement over lawn. Offset nozzle jets in fan arrangement achieve a uniform spray and magnificent water games. Adjustable nozzles optimise performance also at low pressure. Covers circular areas with light rain effect. Irrigated area max 177 m².

Bar	m²	Ø m	l / min
1	123	12,5	14,0
2	177	15,0	17,8
3	143	13,5	20,5
4	123	12,5	23,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8675		2	25,5 x 21 x 12	23 x 25 x 26	0,015	1,01	90

8 000625 086757

AQUALUX 2000

8685





Rotating 2-arm sprinkler constructed entirely in ABS. Special rounded design enables easy movement over lawn. Adjustable nozzles optimise performance also at low pressure.
Covers circular areas with light rain effect.
Irrigated area max 113 m².

Bar	m²	Ø m	l / min
1	87	10,5	4,9
2	113	12,0	7,1
3	104	11,5	8,4
4	87	10,5	9,5

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8685		4	21 x 17 x 8	23 x 25 x 26	0,015	1,07	180

8 000625 086856

IDROJET 2000

8694





Rotating 3-arm sprinkler constructed entirely in ABS. Special rounded design enables easy movement over lawn. Adjustable nozzles optimise performance also at low pressure.
Covers circular areas with light rain effect.
Irrigated area max 113 m².

Bar	m²	Ø m	l / min
1	75	9,8	7,0
2	113	12,0	9,9
3	104	11,5	11,9
4	95	10,0	13,3

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8694		4	21 x 17 x 8	23 x 25 x 26	0,015	1,11	180

8 000625 086948

SPIKE-JET

8661





Static sprinkler with a new design. It can be positioned where needed using the special shaped stake, designed to guarantee maximum stability in the ground. It evenly waters circular areas. Quick-Click standard connection.
Irrigated area max 54 m².

Bar	m²	Ø m	l / min
1	28	6,0	17,5
2	44	7,5	24,7
3	53	8,0	30,3
4	54	8,5	34,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8661		5	15,4 x 30 x 7,2	40 x 18 x 18	0,013	0,57	350

8 000625 086610

SPRAY-JET

8663





Rotating 2-arm sprinkler with adjustable nozzles and a new design.
It can be positioned where needed using the special shaped stake, designed to guarantee maximum stability in the ground.
Covers circular areas with light rain effect. Quick-Click standard connection.
Irrigated area max 64 m².

Bar	m²	Ø m	l / min
1	64	9,0	4,2
2	64	9,0	5,9
3	55	8,5	7,0
4	55	8,5	7,7

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8663		5	15,4 x 30 x 7,2	40 x 18 x 18	0,013	0,73	350

8 000625 086634

VARIO-JET

8662





Multifunction static sprinkler with a new design. It features four different jets, which can be selected by turning the head: spray, blade jet, 360°, 180°.
The stake has been designed to guarantee maximum stability.
Quick-Click standard connection.
Irrigated area max 64 m².

Bar	m²	Ø m	l / min
1	20	5,0	5,6
2	38	7,0	8,1
3	64	9,0	9,8
4	50	8,0	11,5

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8662		5	15,4 x 30 x 7,2	40 x 18 x 18	0,013	0,83	350

8 000625 086627

PULSATING SPRINKLERS

Pulsating sprinklers are the ideal solution for watering at long distances: with the Impact line, Claber takes performance and versatility to new heights.
The head design guarantees that the jet is well distributed, with no water leakage from the sides.
The reverse mechanism means you can water a targeted area between 0° and 360°.
Alternatively, you can lift up the mechanism so that the head turns freely and waters the full circular area evenly. The stainless-steel pin and wear-resistant bronze bushing guarantee maximum durability. The steel tripod with an epoxy powder coating is ultra-stable and height-adjustable (tripod kit, complete with threaded tube).



3/4" (20-27 mm) IMPACT FEMALE HEAD

8705





Pulsating sprinkler head providing 0° to 360° circle coverage or continuous rotation.
3/4" (20-27 mm) female thread.
Diffuser screw assures even water distribution.
Self-adjusting up to 4 bar, adjustment device for optimal setting at high water pressures.
Stainless steel pin and wear-resistant bronze bushing.

Bar	m²	Ø m	l / min
1	214	16,5	9,3
2	330	20,5	11,9
3	380	22,0	14,8
4	397	22,5	16,9

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8705		5	15,4 x 24 x 4,8	28 x 25 x 13	0,009	0,95	360

8 000625 087051

IMPACT ON STAKE

8707





Pulsating sprinkler head providing 0° to 360° circle coverage or continuous rotation, mounted on steady twin-point stake.
Diffuser screw assures even water distribution.
Self-adjusting up to 4 bar, adjustment device for optimal setting at high water pressures.
Stainless steel pin and wear-resistant bronze bushing.
Irrigated area max 397 m².

Bar	m²	Ø m	l / min
1	214	16,5	9,3
2	330	20,5	11,9
3	380	22,0	14,8
4	397	22,5	16,9

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8707		5	10,7 x 28 x 4,5	28 x 25 x 13	0,009	1,78	360

8 000625 087075

IMPACT PLASTIC SPIKE

8708





Pulsating sprinkler head providing 0° to 360° circular coverage or continuous rotation, mounted on twinpoint plastic stake. Diffuser screw assures even water distribution. Self-adjusting up to 4 bar, adjustment device for optimal setting at high water pressures.
Stainless steel pin and wear-resistant bronze bushing.
Irrigated area max 397 m².

Bar	m²	Ø m	l / min
1	214	16,5	9,3
2	330	20,5	11,9
3	380	22,0	14,8
4	397	22,5	16,9

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8708		5	16 x 7 x 39	20 x 39,5 x 19,5	0,016	1,26	240

8 000625 087082

IMPACT TRIPOD

8709





Pulsating sprinkler head providing 0° to 360° circle coverage or continuous rotation, mounted on steady aluminium tripod. "L" water connection at base. Diffuser screw assures even water distribution.
Self-adjusting up to 4 bar, adjustment device for optimal setting at high water pressures.
Stainless steel pin and wear-resistant bronze bushing.
Irrigated area max 491 m².

Bar	m²	Ø m	l / min
1	227	17,0	9,3
2	346	21,0	11,9
3	437	23,6	14,8
4	491	25,0	16,9

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8709		4	9,7 x 38 x 6	18 x 40 x 18	0,012	1,81	280

8 000625 087099

IMPACT TRIPOD KIT

8715





Pulsating sprinkler head providing 0° to 360° circle coverage or continuous rotation, mounted on tripod with adjustable opening and height. "L" water connection at base. Diffuser screw assures even water distribution.
Self-adjusting up to 4 bar, adjustment device for optimal setting at high water pressures. Stainless steel pin and wear-resistant bronze bushing. Steel tripod with epoxy powder paint finish, with 3/4" (20-27 mm) threaded aluminium tube for height adjustment.
Tool-free assembly, comes in practical compact package.
Irrigated area max 572 m².

Bar	m²	Ø m	l / min
1	296	19,4	9,3
2	401	22,6	11,9
3	531	26,0	14,8
4	572	27,0	16,9

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8715		2	12 x 59,5 x 8,8	60 x 26 x 10	0,016	4,27	96

8 000625 087150

										
		8740	**8748**	**8753**	**8743**	**8654**	**8656**	**8658**	**8660**	
TYPE		**OSCILLATING**				**STATIC**				
SUPPORT		sled	sled	sled	sled	sled	sled	sled	stake	
MATERIALS		Aluminium > ABS <	Aluminium > ABS <	Aluminium > ABS <	Aluminium > ABS <	> ABS <	> PP <	> PP <	> PP <	
QUICK-CLICK CONNECTION		✓	✓	✓	✓	✓	✓	✓	✓	
FUNCTIONS		4	5	5	5	6	1	1	1	
WATERING PATTERNS										
										
										
										
										
										
OPERATING PRESSURE (BAR)		1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	
IRRIGATED AREA (m^2)	min	78 m^2	98 m^2	100 m^2	83 m^2	36 m^2	13 m^2	47 m^2	28 m^2	
	max	181 m^2	192 m^2	320 m^2	290 m^2	64 m^2	20 m^2	63 m^2	39 m^2	
AREA (m)	min	11,0 x 7,0	11,5 x 8,5	10,5 x 9,5	10,1 x 8,2	6,00				
	max	16,0 x 11,0	17,5 x 11	19,2 x 16,7	19,9 x 14,6	8,00				
DIAMETER (m)	min						4,00	8,00	6,00	
	max						5,00	9,00	7,00	
FLOW RATE (l/min)	min	8,00	9,10	10,50	11,80	17,50	18,00	18,00	7,80	
	max	15,00	15,70	21,00	25,00	34,00	35,00	30,00	14,80	

												
	8661	**8662**	**8675**	**8685**	**8694**	**8663**	**8705**	**8707**	**8708**	**8709**	**8715**	**9623**
STATIC			**ROTATING**				**PULSATING**					
	stake	stake	base	base	base	stake		stake	stake	tripod	tripod	stake
	> PP <	> PP <	> ABS <	> ABS <	> ABS <	> PP < > ABS <	> ABS <	Steel > ABS <	> PP < > ABS <	Aluminium > ABS <	Steel Aluminium > ABS <	Chrome-plated metal
	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓
	1	4	1	1	1	1	2	2	2	2	2	2
	●	●	●	●	●	●	●	●	●	●	●	●
		◔					◔	◔	◔	◔	◔	◔
		▦					◔	◔	◔	◔	◔	◔
		▬					◔	◔	◔	◔	◔	◔
	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	1 to 3
	28 m²	20 m²	123 m²	87 m²	75 m²	55 m²	214 m²	214 m²	214 m²	227 m²	296 m²	255 m²
	54 m²	64 m²	177 m²	113 m²	113 m²	64 m²	397 m²	397 m²	397 m²	491 m²	572 m²	500 m²
	6,00	5,00	12,50	10,50	9,80	8,50	16,50	16,50	16,50	17,00	19,40	18
	8,50	9,00	15,00	12,00	12,00	9,00	22,50	22,50	22,50	25,00	27,00	25
	8,30	5,60	14,00	4,9	7,00	4,20	9,30	9,30	9,30	9,30	9,30	8,00
	16,00	11,50	23,00	9,50	13,30	7,70	16,90	16,90	16,90	16,90	16,90	16,00

HOSE REELS AND CARTS

Claber offers the most comprehensive range of hose reels and carts for all of your needs in the garden or on your patio or terrace. Versatile, sturdy and easy to manoeuvre, they are also available as a kit, complete with hose, spray nozzle and accessories, with a metal structure for top performance.



THE COMPACT SOLUTIONS

Thanks to their compact size, Claber hose reels are the ideal solution for small and medium-sized gardens and terraces.
Their unmistakeable design is also multi-purpose, as they can be used on the ground or mounted on the wall.
Lightweight, stable and easy to manoeuvre, they can be assembled in a flash, without any tools.
They also come in a kit complete with hose, accessories and a spray nozzle or pistol.

ECO 0

8866



Eco 0 wall hanger for garden hose.
Reinforced grooves make it extremely hard-wearing.
Easy wall mounting option.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8866		8	25 x 15,1 x 16,3	27 x 47 x 18	0,022	2,42	280	8 000625 088669

MINI-SET UTILITY

9028





Compact hose reel with accessories, ready-to-use.
Provided with retractable handle for ease of transport and placement.
Can be wall-mounted. Easy to store away tidily with places to house the pistol, couplings and connectors.
It includes: 10 metres of 9-13 mm hose, 3/4" (20-27 mm) tap connector with 1/2" (15-21 mm) reducer, 2 automatic couplings, 1 spray pistol with dual pattern (jet or fan).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9028		1	21 x 25 x 14	21 x 25 x 14	0,007	1,46	96	8 000625 090280

MINI-SET BALCONY

9031





Compact hose reel with accessories, ready-to-use.
Provided with retractable handle for ease of transport and placement.
Can be mounted. Easy-to-store, thanks to its conveniently located recesses, designed to house couplings, tap connector and pistol.
Includes: 10 metres of Ø 9-13 mm hose, 3/4" (20-27 mm) tap connector with 1/2" (15-21 mm) reducer, 2 automatic couplings, 1 multifunction pistol with aerator.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9031		1	21 x 25 x 14	21 x 25 x 14	0,007	1,51	96	8 000625 090310

AQUAPONY

8887





Compact hose reel that can be used free standing or wall mounted.
Space-saving design.
Complete with automatic coupling.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8887		1	40 x 40 x 12	40 x 40 x 12	0,019	1,60	54

8 000625 088874

AQUAPONY KIT

8884





Aquapony removable reel with:
-15 m of Ø 1/2" (12,5 mm) Silver Elegant Plus hose
- 3/4" (20-27 mm) tap connector + 1/2" (15-21 mm) reducer
- 4 automatic couplings (one with aquastop)
- spray nozzle.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8884		1	27 x 32 x 30	27 x 32 x 30	0,026	3,40	30

8 000625 088843

KIROS

8921





Removable wall-mounted hose reel in easy assembly kit without use of tools.
Supplied complete with wall brackets (2 Pcs) and automatic coupling for hose connection.
Compact pack dimensions.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8921		1	40 x 40 x 12	40 x 40 x 12	0,019	2,00	54

8 000625 089215

KIROS KIT

8945





Wall-mounted hose reel with:
- 20 m of Ø 1/2" (12,5 mm) Silver Elegant Plus hose
- 3/4" (20-27 mm) tap connector + 1/2" (15-21 mm) reducer
- 4 automatic couplings (one with aquastop)
- spray nozzle
- 2 wall brackets.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8945		1	40 x 32 x 31	40 x 31 x 32	0,039	4,40	18

8 000625 089451

WALL BRACKETS

8711





For wall mounted installations of Claber hose reels.
Includes:
- 2 wall brackets
- screws and nuts
- expansion bolts
- hose reel retainer wingnut.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8711		10	7,9 x 15,7 x 3,8	25 x 19 x 10	0,005	1,10	1440

8 000625 087112

SET AQUAPASS

8974





Aquapass, the original hose cassette with water thru-feed either with hose partially or totally wound up. Includes 15 m of round hose diam. 15 mm combining the performance of a traditional hose reel with that of a portable hose cassette.
Compact high impact, lightweight housing, it is supplied with automatic Quick-Click couplings, 1,5 m extension hose, jet spray nozzle, wall bracket.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
8974		1	40 x 40 x 12	40 x 40 x 12	0,019	4,50	54

8 000625 089741

THE ESSENTIALS

Claber's work on its carts also continues to develop, offering several benefits both in store and in the garden.
Made of sturdy plastic, these models can be easily assembled, without needing any tools.
This is thanks to the new assembly mechanism for the flanges and the reinforced drum.
The new plastic handle is ergonomic and ensures a comfortable grip; a feature that has also shrunk the size of the packaging, now even more compact and easier to transport.



ECOSEI

8980





Comes disassembled in a kit, for rapid, easy assembly without tools.
Ergonomic plastic handle. Sturdy, lightweight rust-proof aluminium frame.
New cross sections without sharp edges, with tubular strengthening structure.
Reel drum turns smoothly on delrin bearings.
Contoured, partly enclosed wheels for movement between even the tightest spaces.
Coupling supplied for hose connection; hose holding clip included.
Compact packaging to facilitate transport, storage and display in retail outlets.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8980		1	40 x 40 x 12	40 x 40 x 12	0,019	2,88	54	8 000625 089802

ECOSEI KIT

8981





The kit consists in the hose cart Ecosei disassembled, packed in a carton supplied complete with:
- 20 m of 1/2" (12,5 mm) Silver Elegant Plus hose
- 3/4" (20-27 mm) tap connector + reducer 1/2" (15-21 mm)
- 4 couplings (2 for preparing the extension)
- spray nozzle
- hose holding clip.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8981		1	60 x 40 x 13	60 x 40 x 13	0,030	5,40	32	8 000625 089819

SILVER-AL

8977





Comes disassembled in a kit, for rapid, easy assembly without tools.
Ergonomic plastic handle.
Sturdy, lightweight rustproof aluminium frame.
New cross sections without sharp edges, with tubular strengthening structure.
Reel drum turns smoothly on delrin bearings.
Contoured, partly enclosed wheels for movement between even the tightest spaces.
Coupling supplied for hose connection; hose holding clip included.
Compact packaging to facilitate transport, storage and display in retail outlets.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8977		1	40 x 40 x 12	40 x 40 x 12	0,019	2,84	54	8 000625 089772

EXTENSION

8962



1,5 m Ø 1/2" (12,5 mm) extension hose with automatic Quick-Click couplings and 3/4" - 1/2" tap connector.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8962		12	19 x 38 x 2,7	39 x 39 x 12	0,02	4,20	288	8 000625 089628





GENIUS®, NUMBER ONE FOR MEDIUM-SIZED GARDENS



Reinforced cross-bars, a special anti-twist groove and a lower centre of gravity to enhance its stability: these are the features that make Genius the ideal cart for medium-sized gardens.
Both handy and sturdy, they can be used to unwind up to 100 metres of hose, depending on the model, while still being practical to use.
The winding knob has been carefully studied to guarantee a comfortable grip and to make the hose easy to unwind and rewind.
All with the same guaranteed Claber quality.
The aluminium frame is rustproof, sturdy and quick and easy to assemble without the need of tools.





GENIUS 60

8862





Genius hose cart, ideal for medium-sized gardens.
Comes disassembled in a kit for quick and easy assembly, without tools.
Lightweight, sturdy, rustproof aluminium frame.
Reinforced plastic drum, mounted on Delrin bearings, meaning it rewinds without causing friction. Easy-grip knob to make the hose handy to rewind.
Coupling supplied for hose connection; hose holding clip included.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8862		1	40 x 40 x 49	40 x 40 x 49	0,076	3,14	24	8 000625 088621

GENIUS 100

8872





Genius hose reel cart, ideal for large gardens.
Comes disassembled in a kit for quick and easy assembly, without tools.
Lightweight, sturdy, rustproof aluminium frame.
Reinforced plastic drum, mounted on Delrin bearings, meaning it rewinds without causing friction.
Large size wheels covered in rubber giving high stability, ideal for heavier load.
Easy-grip knob to make the hose handy to rewind.
Coupling supplied for hose connection; hose holding clip included.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8872		1	38 x 38 x 58	38 x 38 x 58	0,083	4,20	22	8 000625 088720

KIT PRONTO 30

8864





Kit with Genius 60 hose cart, supplied complete with:
- 30 m of Ø 1/2" (12,5 mm) Top-Black hose
- tap connector, couplings and spray nozzle
- 1,5 m extension hose with couplings
- hose holding clip.

Ready-to-use.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8864		1	40 x 40 x 49	40 x 40 x 49	0,076	7,90	24	8 000625 088645

READY TO USE

Our top-selling carts are delivered on pallets, always ready to use: whether displayed in store on practical pallets or at home, they are preassembled and come complete with hose, spray nozzle and all the accessories you need. A solution that enhances product visibility and promotes self-service purchases.





QUBO PRONTO AQUAVIVA 20

8933



Ready-to-use hose cart with a new design, equipped with a compact drum (41 cm wide) to make it easier to use in narrow spaces.
The telescopic handle is easy to close away by pressing on the two side levers.
Aluminium structure.
Carved wheels to move easily over any surface.
Supplied with:
- 20 m of Ø 1/2" (12,5 mm) Aquaviva Plus hose
- 4 automatic couplings (one with aquastop)
- spray nozzle
- tap connector
- hose holding clip.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8933		8	41 x 86 x 40	80 x 120 x 70	0,670	45,00	8	8 000625 089338

GENIUS COMPACT PRONTO 25

8858



Ready-to-use hose cart. Stainless aluminium frame, reinforced cross bars and PP drum.
Swivel knob.
Supplied complete with:
- 25 m of Ø 5/8" (15 mm) Silver Elegant Plus hose
- 4 automatic couplings (one with aquastop)
- spray nozzle
- tap connector
- hose holding clip.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8858		12	40 x 46 x 37	80 x 120 x 110	1,060	85,00	12

8 000625 088584

GENIUS COMPACT PRONTO AQUAVIVA 20

8985



Ready-to-use hose cart. Stainless aluminium frame, reinforced crossbars and PP drum.
Swivel knob.
Supplied with:
- 20 m of Ø 5/8" (15 mm) Aquaviva Plus hose
- 4 automatic couplings (one with aquastop)
- spray nozzle
- tap connector hose
- holding clip.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8985		12	40 x 46 x 37	80 x 120 x 120	1,060	75,00	12

8 000625 089857

METAL JUNIOR PRONTO AQUAVIVA 25

8865



Preassembled, ready-to-use hose cart. Aluminium structure with telescopic handle.
Pivoting winding handle and semi-enclosed wheels.
Supplied with:
- 25 m of Ø 1/2" (12.5 mm) Aquaviva Plus hose
- 4 automatic couplings (one with aquastop)
- spray nozzle
- tap connector hose
- holding clip.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8865		12	40,5 x 53 x 44	80 x 120 x 120	1,150	70,00	12

8 000625 088652

FOR THE PROS

The most high-performing Claber carts are for the most demanding customers, ideal for those looking for professional quality and handiness.
The structure is made entirely of metal and the surface has been treated to make the product last over time.
The winding handle is handy and enables a smooth rewind of the hose. The drum is mounted on acetalic resin bearings, making it easier to rewind without causing friction.
The perfect compromise for a sturdy yet handy product.



METAL 40

8890





Removable hose reel for wall mounting, comes in a kit for easy, tool-free assembly.
The frame and drum are constructed entirely of metal.
Epoxy resin finish helps protect the metal work from the elements over time.
Supplied complete with two wall brackets, universal hose connector and hose holding clip.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8890		1	40 x 40 x 12	40 x 40 x 12	0,019	5,40	54

8 000625 088904

METAL 60

8891





The frame and drum are constructed entirely of metal. Resistant to elements thanks to its epoxy resin treatment.
Available in kit, easy to assemble without the use of tools.
Fitted with silent-block preventing the wear of metal on metal.
Large size wheels make the handling easier and guarantee stability on all type of ground surfaces.
Universal coupling supplied for hose connection, hose holding clip included.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8891		1	59 x 39 x 12	59 x 39 x 12	0,028	6,80	32

8 000625 088911

METAL GEMINI

8894





The frame and drum are constructed entirely of metal. Resistant to elements thanks to its epoxy resin treatment.
Available in kit, easy to assemble without the use of tools.
Fitted with silent-block preventing the wear of metal on metal.
Large size wheels make the handling easier and guarantee stability on all type of ground surfaces.
Equipped with 2 universal couplings and hose holding clip.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8894		1	47 x 56 x 13	47 x 56 x 13	0,034	9,20	14

8 000625 088942

METAL PROFY

8895





The frame and drum are constructed entirely of metal. Resistant to elements thanks to its epoxy resin treatment. Available in kit, easy to assemble without the use of tools.
Fitted with silent-block preventing the wear of metal on metal.
Large size wheels covered in rubber giving high stability, ideal for heavier load.
Water-thru of large diameter.
Equipped with 2 universal couplings and hose holding clip.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8895		1	57 x 57 x 13	57 x 57 x 13	0,039	10,20	12

8 000625 088959

JUMBO

8900





Hose cart with 4 wheels. The frame and drum are constructed entirely of metal.
Resistant to the elements, thanks to its epoxy resin surface treatment.
Metal parts coupled by way of Silent block mounts.
Zinc coated parts.
Drum at 90°. Large diameter wheels with anti-flat tyres.
Comes with 2 metres Ø 5/8" (15 mm) extension hose and couplings.
Supplied as kit, quick and easy to assemble.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8900		1	60 x 80 x 17	60 x 80 x 17	0,082	15,60	10

8 000625 089000

ROTOROLL® EVOLUTION

The Rotoroll Evolution makes watering your garden a joy, thanks to its innovative features and unmistakeable Claber quality. With its practical wall mount, Rotoroll is ready to use. Free 180° rotation means the hose unwinds smoothly in any direction, to ensure maximum comfort every time. Once you are done, the hose rewinds back up quickly and tidily, with no effort at all, thanks to the new automatic SLOW REWIND mechanism. High-quality materials that are resistant to knocks and exposure to sunlight make Rotoroll Evolution the perfect hose reel for any garden, large or small, as well as for your patio.





FREE ROTATION



SLOW REWIND SYSTEM



SECURITY LOCK



HIGH-QUALITY MATERIALS

OPTIONAL FLOOR STAND

INFO

ROTOROLL EVOLUTION 10 m

8692





A hose reel with an exclusive automatic rewind mechanism, "Slow Rewind", for safe and easy use. Ready to use with 10 m of special non-deformable hose with an anti-friction surface for smooth, quick rewinding.
It is made from materials resistant to impact and sunlight, to ensure maximum durability.
The reinforced resin wall support with a rustproof aluminium pin allows the hose reel to swing through 180° towards the direction of use.
This avoids the hose being bent or obstructed.
It is equipped with an extension hose to connect it to a tap (1,5 m), a 3/4" (20-27 mm) connector, automatic couplings and a spray nozzle. It comes complete with a wall support, screws and plugs for wall mounting.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8692		1	41 x 38,5 x 24	41 x 38,5 x 24	0,038	6,00	20

8 000625 086924

ROTOROLL EVOLUTION 20 m

8696





A hose reel with an exclusive automatic rewind mechanism, "Slow Rewind", for safe and easy use. Ready to use with 20 m of special non-deformable hose with an anti-friction surface for smooth, quick rewinding. It is made from materials resistant to impact and sunlight, to ensure maximum durability.
The reinforced resin wall support with a rustproof aluminium pin allows the hose reel to swing through 180° towards the direction of use.
This avoids the hose being bent or obstructed. It is equipped with an extension hose to connect it to a tap (1,5 m length), a 3/4" (20-27 mm) tap connector, automatic couplings and a spray nozzle.
It comes complete with a wall support, screws and plugs for wall mounting.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8696		1	49 x 26,5 x 38	49 x 26,5 x 38	0,050	9,50	12

8 000625 086962

ROTOROLL EVOLUTION 30 m

8697





A hose reel with an exclusive automatic rewind mechanism, "Slow Rewind", for safe and easy use. Ready to use with 30 m of special non-deformable hose with an anti-friction surface for smooth, quick rewinding.
It is made from materials resistant to impact and sunlight, to ensure maximum durability.
The reinforced resin wall support with a rustproof aluminium pin allows the hose reel to swing through 180° towards the direction of use.
This avoids the hose being bent or obstructed. It is equipped with an extension hose to connect up to a tap (2 m length), a 3/4" (20-27 mm) tap connector, automatic couplings and a spray nozzle.
It comes complete with a wall support, screws and plugs for wall mounting.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8697		1	57,5 x 28 x 51	57,5 x 28 x 51	0,080	14,00	12

8 000625 086979

ROTOROLL EVOLUTION FLOOR STAND

8690




Floor base for the Rotoroll Evolution 10, 20 m and 30 m automatic hose reels.
This allows the hose reel to be positioned anywhere in the garden, provided it is located near a tap.
It can swivel 360° and be easily fixed to a concrete slab using the screws and plugs supplied.

Size: 23 x 15,5 x 23 cm.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8690		1	24,2 x 24,2 x 15	24,2 x 24,2 x 15	0,01	1,00	63

8 000625 086900

HOSE REELS AND CARTS										
ITEM	**9031**	**9028**	**8887**	**8884**	**8921**	**8945**	**8980**	**8981**	**8977**	
FEATURES	THE COMPACT SOLUTIONS						THE ESSENTIALS			
Wheels							✓	✓	✓	
Aluminium structure			✓	✓	✓	✓	✓	✓	✓	
Plastic structure	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Steel structure										
Stainless steel structure										
Surface treatment with epoxy resin										
Assembled and ready to use	✓	✓		✓		✓				
Kit	✓	✓		✓		✓		✓		
Telescopic handle										
No tools assembly			✓		✓		✓	✓	✓	
Automatic rewind										
TECHNICAL SPECIFICATIONS										
Weight (kg)	1,5	1,33	1,42	3,42	1,8	4,26	2,88	5,4	2,84	
Size (cm)										
Width	21	21	42	42	42	42	48,2	48,2	47,2	
Height	24	24	28,6	28,6	30	30	87	87	84,5	
Depth	14	14	25,5	25,5	40	40	39	39	38	
Hose reel capacity										
9 - 13 mm	10 m	10 m								
1/2" - 12,5 mm			20 m	15 m	40 m	20 m	60 m	20 m	60 m	
5/8" - 15 mm					35 m		50 m		50 m	
3/4" - 19 mm										
IDEAL FOR										
Small gardens	✓	✓	✓	✓						
Medium-sized gardens					✓	✓	✓	✓	✓	
Large gardens										
ACCESSORIES SUPPLIED										
Hose	✓	✓		✓		✓		✓		
Automatic couplings	2	2	1	3+1 stop	1	3+1 stop	1	3+1 stop	1	
Spray nozzle/Pistol	1	1		1		1		1		
Tap connector	1	1		1		1		1		
Hose rack							1	1	1	
Universal couplings										
Extension										
Wall brackets					2	2				

																
	8862	**8872**	**8864**	**8933**	**8858**	**8985**	**8865**	**8890**	**8891**	**8894**	**8895**	**8900**	**8692**	**8696**	**8697**	**8974**
	THE N.1 FOR MEDIUM-SIZED GARDENS			READY TO USE				FOR THE PROS					ROTOROLL EVOLUTION AQUAPASS			
	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓				
	✓	✓	✓	✓	✓	✓	✓									
	✓	✓	✓	✓	✓	✓	✓						✓	✓	✓	✓
								✓	✓	✓	✓	✓				
								✓	✓	✓	✓	✓				
				✓	✓	✓	✓						✓	✓	✓	✓
			✓	✓	✓	✓	✓							✓	✓	✓
				✓		✓	✓						✓			
	✓	✓	✓					✓	✓	✓	✓	✓				
													✓	✓	✓	
	3,14	3,73	7,4	4,45	5	5	5,05	4,1	5,2	7,2	8,2	17,4		8,5	12,6	4,15
	47,4	58,3	47,4	41	45	45	49,3	51,5	52,7	64,3	72	61,5	21	25	26	34,4
	73,5	80	73,5	54	73,8	73,8	81,6	47,8	88,3	86,5	89,6	100	34	60	66	37
	44	48	44	40	44	44	54	38	43	46	46,6	88,3	37	39	46	11,5
	60 m	100 m	30 m	20 m			25 m	85 m	85 m	130 m	165 m	165 m	10 m	20 m	30 m	15 m
	50 m	90 m			25 m	20 m		60 m	60 m	100 m	130 m	130 m				
								40 m	40 m	60 m	75 m	75 m				
													✓			
	✓		✓	✓	✓	✓	✓	✓						✓		
		✓							✓	✓	✓	✓			✓	
			✓	✓	✓	✓	✓						✓	✓	✓	✓
	1	1	3+1 stop	3+1 stop	3+1 stop	3+1 stop	3+1 stop					3	1	1	1	1
			1	1	1	1	1						1	1	1	1
			1	1	1	1	1					1	1	1	1	1
	1	1	1	1	1	1	1	1	1	1	1					
								1	1	2	2					
			1,5 m 1/2"									2 m 5/8"	1,5 m	1,5 m	2 m	1,5 m
								2					1	1	1	1

LIFE OUTDOORS

Claber has really thought of everything, suggesting practical solutions for gardens and living spaces, like the Malibù Shower, which can be placed on any surface thanks to its stable tripod base, to offer a relaxing moment in the midst of the greenery or at poolside.
For collecting everything in the garden, as well as at home or in the office, there's Carry Cart, the solid, extremely light multi-purpose cart that can be taken everywhere with ease thanks to the sculpted tread of its wheels, ideal for heavy loads too, used with robust Claber bags in recyclable material. Lastly, not forgetting Claber's cleaning solutions: from pistols with dynamic jets for cleaning walls and paving stones to brushes with soft bristles for washing cars and bicycles safely and gently.



CARRY CART ECO

8934





The original cleaning up cart for the disposal of outdoor refuse (leaves, grass cutting, paper, etc.) Rust-resistant aluminium frame, it can be left outdoor as it is completely weatherproof.
Push-in connecting system of the innovative hivestructure side upright.
The ring supporting the disposal bag can be adjusted to different heights thanks to the lever clamps, overcoming any problem due to the size of the collecting bags. Resin clamps fit the bag to the ring.
New snap-fit polypropylene support base is able to withstand heavy loads.
Aluminium wheel-axle inserted into proper slots.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8934		1	59 x 44 x 16	59 x 44 x 16	0,041	3,16	16	8 000625 089345

SET OF 10 CLABER BAGS

8904



Bags made of strong recyclable material, three times thicker than the average garden bag.
Ideal for all gardening tasks.
Large holding capacity (110 l) and excellent resistance to thorns and pruned branches.
Pack of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8904		10	30 x 39 x 3	30 x 40 x 21	0,002	12	240	8 000625 089048

BAG CLAMPS

8713





Claber resin clamps for fitting bags on Carry-Carts.
4 Pcs. Blister pack.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8713		10	7,9 x 15,7 x 3,8	25 x 19 x 10	0,005	0,45	1440	8 000625 087136

WIPPY CAR

8774





Flexible wash brush for all washing tasks.
Long lasting synthetic bristles.
Water flow control valve incorporated in handle.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8774		4	7,5 x 43 x 5,5	27 x 47 x 12	0,015	1,52	196

8 000625 087747

WASHING PISTOL

8757





With frontal regulated flow.
Fan-wise opening for washing action.
Single trigger locking mechanism on/off regulator.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8757		12	15,5 x 21,5 x 3,5	28 x 25 x 13	0,009	1,41	864

8 000625 087570

MALIBÙ

8956







Disassembled shower for the garden, camping and balcony in rust-resistant aluminium.
Lever clamp for height adjustament, regulating water flow valve.
Tripod suitable for any hard surface.
Height 200 cm.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8956		3	14,5 x 75 x 6	77 x 20 x 16	0,023	2,90	90

8 000625 089567

WIPPY AUTO

8843







Handy and easy to use for every washing need.
Round profile of the bristles: utmost convenience and easy cleaning.
Sturdy brush head with synthetic bristles ensuring a good cleaning result and resistance to hot water.
Complete with 120 cm long reach handle in anodysed aluminium and water flow regulating valve.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8843		2	26 x 84 x 7	90 x 27 x 14	0,034	1,92	36

8 000625 088430

HAPPY FRESH EVOLUTION

Happy Fresh is the practical kit designed by Claber to cool down hot summer days on the patio, in the garden or on the terrace. The efficiency of the micro-mist nozzles means that the microscopic drops of water released into the atmosphere can reduce the temperature by up to 6 degrees, creating a feeling of well-being on even the hottest days. Quick to assemble, the Happy Fresh Kit can easily be hooked onto parasols, gazebos and sunshades; you just need a tap and an extension hose to enjoy only the pleasant side of summer. The system can be integrated with Aquauno Mist, the new versatile battery-powered Claber timer that allows you to set the frequency and run time of the nebulisation periods.

HAPPY FRESH KIT

Only the best of summer



UP TO 6 DEGREES LESS,
THANKS TO THE EFFICIENCY
OF THE MICRO-MIST NOZZLES



EASY ATTACHMENT
AND ANTI-DRIP BRASS NOZZLES



OPTIONAL TIMER

AQUAUNO MIST

8496





Automatic one-way timer, ideal for cyclical automation of both Happy Fresh cooling systems and watering systems on the terrace and in the garden. Easy programming with 2 rotary knobs: one to set the frequency and the other to select the run time. 27 programs can be selected for drip systems (yellow sector, run time from 2 to 90 mins every 12, 24 or 48 hours), 24 possible combinations for Happy Fresh systems (blue quadrant, run time from 5 to 45 seconds, every 1, 3, 5, 10 mins). Option of 5 min test function. Equipped with washable filter. Works with 9 V alkaline battery. Electronic part perfectly sealed.
Operating pressure from 0,5 to 10 bars. 100% checked and tested.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8496		2	7 x 14,8 x 20,5	19 x 16,5 x 16	0,005	1,05	280

8 000625 084968

HAPPY FRESH EVOLUTION KIT 7,5 m

90751





Misting kit ideal for cooling down outdoor spaces on hot summer days. The kit (made up of 7,5 m of hose, 6 micro-mist nozzles, connectors and fitting clips) can easily be hooked onto sunshades, gazebos and parasols and connected to the tap (using an extension hose fitting that is not provided). The micro-mist sprayers, with anti-drip brass nozzles, release a vapour of microscopic drops of water into the air, which allow the atmosphere to be cooled by up to 6°. The system can be automatically activated by adding the Aquauno Mist timer (not included).
Operating pressure: 3-6 bar.

CONTAINS

Hose	7,5 m	Spring clips to fasten hose	11
In-line micro-mist nozzles	5	3/4" thread male connector	1
End-of-line micro-mist nozzle	1	Connector for hose with washable filter	1
Clips + screws to fasten hose	11 + 11		

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90751		4	30 x 30,5 x 4,4	39 x 39 x 19	0,029	3,00	96

8 000625 907519

HAPPY FRESH EVOLUTION KIT 12 m

90752





Misting kit ideal for cooling down outdoor spaces on hot summer days. The kit (made up of 12 m of hose, 9 micro-mist nozzles, connectors and fitting clips) can easily be hooked onto sunshades, gazebos and parasols and connected to the tap (using an extension hose fitting that is not provided). The micro-mist sprayers, with anti-drip brass nozzles, release a vapour of microscopic drops of water into the air, which allow the atmosphere to be cooled by up to 6°. The system can be automatically activated by adding the Aquauno Mist timer (not included).
Operating pressure: 3-6 bar.

CONTAINS

Hose	12 m	Spring clips to fasten hose	17
In-line micro-mist nozzles	8	3/4" thread male connector	1
End-of-line micro-mist nozzle	1	Connector for hose with washable filter	1
Clips + screws to fasten hose	17 + 17		

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90752		1	29,5 x 30,5 x 7,5	29,5 x 30,5 x 7,5	0,007	0,97	108

8 000625 907526

KIT HAPPY FRESH EVOLUTION KIT 12 m W/TIMER

90753





Misting kit ideal for cooling down outdoor spaces on hot summer days.
The kit (made up of 12 m of hose, 9 micro-mist nozzles, connectors and fitting clips) can easily be hooked onto sunshades, gazebos and parasols. The micro-mist sprayers, with anti-drip brass nozzles, release a vapour of microscopic drops of water into the air, which allow the atmosphere to be cooled by up to 6°. The kit also includes the battery-powered Aquauno Mist timer, which automatically turns on the cooling system at regular intervals.
Operating pressure: 3-6 bar.

CONTAINS

Hose	12 m	Spring clips to fasten hose	17
In-line micro-mist nozzles	8	3/4" thread male connector	1
End-of-line micro-mist nozzle	1	Connector for hose with washable filter	1
Clips + screws to fasten hose	17 + 17	Aquauno Mist timer	1

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90753		1	29,5 x 30,5 x 7,5	29,5 x 30,5 x 7,5	0,007	1,40	108

8 000625 907533

HOSES

Claber has always been at the forefront for its above-ground irrigation hoses, offering high quality and non-toxic products.
These hoses are made of carefully selected, non-recycled materials with no heavy metals or phthalates, safeguarding your health and the environment. They are also all UV and algae resistant.
Handiness, endurance and great aesthetics are guaranteed: Claber can make a difference.

TOP BLACK®

Kink-resistant hose with a special braided reinforcement that guarantees excellent stability at high water pressure; algae-resistant and UV-resistant.
The Top-Black hoses are 100% safe, as they contain no heavy metals or phthalates.



FLEXYFORT® GREEN

Knitted hose with special kink-resistant layer: it does not twist even at high pressure.
Algae-resistant and UV-resistant.
The Flexyfort Green hoses are 100% safe, as they contain no heavy metals or phthalates.



SILVER ELEGANT® PLUS

Ultra-light braided hose that is easy to handle, flexible, algae-resistant and UV-resistant.
The Silver Elegant Plus hoses are 100% safe, as they contain no heavy metals or phthalates.



AQUAVIVA® PLUS

Easy-to-handle hose with algae-resistant, robust and flexible lining.
The Aquaviva Plus hoses are 100% safe, as they contain no heavy metals or phthalates.



TOP-BLACK Ø 1/2" (12,5 mm) m 15
9037

TOP-BLACK Ø 1/2" (12,5 mm) m 25
9064

TOP-BLACK Ø 1/2" (12,5 mm) m 50
9036

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9037		1	Ø 38 x 9	Ø 38 x 9	0,013	1,95	78	8 000625 090372
9064		1	Ø 38 x 10	Ø 38 x 10	0,025	3,20	66	8 000625 090648
9036		1	Ø 38 x 18	Ø 38 x 18	0,025	6,50	36	8 000625 090365



9037



9064



9036

TOP-BLACK Ø 5/8" (15 mm) m 15
9040

TOP-BLACK Ø 5/8" (15 mm) m 25
9065

TOP-BLACK Ø 5/8" (15 mm) m 50
9043

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9040		1	Ø 38 x 9	Ø 38 x 9	0,013	2,30	78	8 000625 090402
9065		1	Ø 38 x 11	Ø 38 x 11	0,016	3,80	60	8 000625 090655
9043		1	Ø 38 x 20	Ø 38 x 20	0,028	7,65	30	8 000625 090433



9040



9065



9043

TOP-BLACK Ø 3/4" (19 mm) m 25
9048

TOP-BLACK Ø 3/4" (19 mm) m 50
9045

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9048		1	Ø 43 x 17,5	Ø 43 x 17,5	0,032	6,92	36	8 000625 090488
9045		1	Ø 45 x 25	Ø 45 x 25	0,050	13,50	16	8 000625 090457



9048


9045

FLEXYFORT GREEN Ø 1/2" (12,5 mm) m 15
9131

FLEXYFORT GREEN Ø 1/2" (12,5 mm) m 25
9141

FLEXYFORT GREEN Ø 1/2" (12,5 mm) m 50
9133

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9131		1	Ø 38 x 9	Ø 38 x 9	0,013	2,15	78	8 000625 091317
9141		1	Ø 38 x 10	Ø 38 x 10	0,015	3,50	66	8 000625 091416
9133		1	Ø 38 x 16	Ø 38 x 16	0,023	7,80	36	8 000625 091331



9131



9141



9133

FLEXYFORT GREEN Ø 5/8" (15 mm) m 15
9142

FLEXYFORT GREEN Ø 5/8" (15 mm) m 25
9145

FLEXYFORT GREEN Ø 5/8" (15 mm) m 50
9136

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9142		1	Ø 38 x 9	Ø 38 x 9	0,013	2,50	72	8 000625 091423
9145		1	Ø 38 x 11	Ø 38 x 11	0,016	4,20	60	8 000625 091454
9136		1	Ø 38 x 22	Ø 38 x 22	0,031	8,40	30	8 000625 091362



9142



9145



9136

FLEXYFORT GREEN Ø 3/4" (19 mm) m 25
9149

FLEXYFORT GREEN Ø 3/4" (19 mm) m 50
9138

FLEXYFORT GREEN Ø 1" (25 mm) m 50
9140

LIMITED STOCK

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9149		1	Ø 40 x 17	Ø 40 x 17	0,027	6,15	36	8 000625 091492
9138		1	Ø 45 x 25	Ø 45 x 25	0,050	12,20	16	8 000625 091386
9140		1	Ø 70 x 20	Ø 70 x 20	0,098	20,50	10	8 000625 091409



9149


9138



9140

SILVER ELEGANT PLUS Ø 1/2" (12,5 mm) m 15

9123

SILVER ELEGANT PLUS Ø 1/2" (12,5 mm) m 25

9124

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9123		1	Ø 38 x 8	Ø 38 x 8	0,011	1,73	78	8 000625 091232
9124		1	Ø 38 x 11	Ø 38 x 11	0,016	2,88	66	8 000625 091249



9123



9124

SILVER ELEGANT PLUS Ø 5/8" (15 mm) m 15

9125

SILVER ELEGANT PLUS Ø 5/8" (15 mm) m 25

9126

SILVER ELEGANT PLUS Ø 5/8" (15 mm) m 50

9127

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9125		1	Ø 38 x 9	Ø 38 x 9	0,013	2,18	78	8 000625 091256
9126		1	Ø38 x 13	Ø 38 x 13	0,019	3,63	60	8 000625 091263
9127		1	Ø 38 x 20	Ø 38 x 20	0,030	7,25	30	8 000625 091270



9125



9126



9127

SILVER ELEGANT PLUS Ø 3/4" (19 mm) m 25

9128

SILVER ELEGANT PLUS Ø 3/4" (19 mm) m 50

9129

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9128		1	Ø 38 x 17	Ø 38 x 17	0,025	5,50	36	8 000625 091287
9129		1	Ø 45 x 25	Ø 45 x 25	0,050	11,00	16	8 000625 091294



9128



9129

1/2" (12,5 mm) SILVER ELEGANT PLUS HOSE KIT 15 m

8845



Hose kit complete with:
- 15 m of 1/2" (12,5 mm) Silver Elegant Plus hose
- 3/4" (20-27 mm) multithread tap connector and 1/2" (15-21 mm) reducer
- 2 automatic couplings (one with aquastop)
- spray nozzle.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8845		1	35 x 34 x 8	35 x 34 x 8	0,010	1,70	60	8 000625 088454

5/8" (15 mm) SILVER ELEGANT PLUS HOSE KIT 15 m

8856



Hose kit complete with:
- 15 m of 5/8" (15 mm) Silver Elegant Plus hose
- 3/4" (20-27 mm) multithread tap connector and 1/2" (15-21 mm) reducer
- 2 automatic couplings (one with aquastop)
- spray nozzle.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8856		1	37,5 x 38 x 10	37,5 x 38 x 10	0,014	2,05	60	8 000625 088560





AQUAVIVA PLUS Ø 1/2" (12,5 mm) m 10

9120

AQUAVIVA PLUS Ø 1/2" (12,5 mm) m 15

9003

AQUAVIVA PLUS Ø 1/2" (12,5 mm) m 25

9004

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9120		1	Ø 37 x 7	Ø 37 x 7	0,01	0,98	84	8 000625 091201
9003		1	Ø 38 x 8	Ø 38 x 8	0,011	1,45	78	8 000625 090037
9004		1	Ø 38 x 11	Ø 38 x 11	0,016	2,25	66	8 000625 090044



AQUAVIVA PLUS Ø 5/8" (15 mm) m 15

9005

AQUAVIVA PLUS Ø 5/8" (15 mm) m 25

9006

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9005		1	Ø 38 x 9	Ø 38 x 9	0,013	1,80	78	8 000625 090051
9006		1	Ø 38 x 11	Ø 38 x 11	0,016	3,00	60	8 000625 090068



AQUAVIVA PLUS Ø 3/4" (19 mm) m 25

9008

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9008		1	Ø 38 x 16	Ø 38 x 16	0,023	4,75	36	8 000625 090082



BRAIDED AND KNITTED HOSES													
ITEM	**9037**	**9064**	**9036**	**9040**	**9065**	**9043**	**9045**	**9048**	**9131**	**9141**	**9133**	**9142**	**9145**
DIAMETER (")	1/2"	1/2"	1/2"	5/8"	5/8"	5/8"	3/4"	3/4"	1/2"	1/2"	1/2"	5/8"	5/8"
DIAMETER (mm)	12,5 mm	12,5 mm	12,5 mm	15 mm	15 mm	15 mm	19 mm	19 mm	12,5 mm	12,5 mm	12,5 mm	15 mm	15 mm
LENGTH (m)	15	25	50	15	25	50	50	25	15	25	50	15	25
PRODUCT LINE	**TOP - BLACK**								**FLEXYFORT GREEN**				
QUALITY	★★★★★								★★★★★				
WARRANTY	25 years								25 years				
TYPE	braided								knitted				
HOSE CROSS-SECTION IMAGE													
NO. LAYERS	3								3				
MATERIAL	PVC + Polyester								PVC + Polyester				
MAX PRESSURE	12	12	12	12	12	12	8	8	8	8	8	8	8
BURSTING PRESSURE	36	36	36	36	36	36	25	25	24	24	24	24	24
TEMPERATURE °C	- 10° / + 60°								- 10° / + 60°				
NO PHTHALATES	✓								✓				
ALGAE-RESISTANT	✓								✓				
KINK-RESISTANT	✓								✓				
FLEXIBLE	✓								✓				
NON-TOXIC	✓								✓				

9136	9149	9138	9140	9123	9124	9125	9126	9127	9128	9129	9120	9003	9004	9005	9006	9008
5/8"	3/4"	3/4"	1"	1/2"	1/2"	5/8"	5/8"	5/8"	3/4"	3/4"	1/2"	1/2"	1/2"	5/8"	5/8"	3/4"
15 mm	19 mm	19 mm	25 mm	12,5 mm	12,5 mm	15 mm	15 mm	15 mm	19 mm	19 mm	12,5 mm	12,5 mm	12,5 mm	15 mm	15 mm	19 mm
50	25	50	50	15	25	15	25	50	25	50	10	15	25	15	25	25
FLEXYFORT GREEN				**SILVER ELEGANT PLUS**							**AQUAVIVA PLUS**					
★★★★★				★★★★							★★★					
25 years				20 years							10 years					
knitted				braided							braided					
																
3				4							5					
PVC + Poliestere				PVC + Polyester							PVC + Polyester					
8	7	7	5	10	10	10	10	10	8	8	8	8	8	8	8	7
24	21	21	16	30	30	30	30	30	24	24	24	24	24	24	24	21
- 10° / + 60°				- 10° / + 60°							- 10° / + 60°					
✓				✓							✓					
✓				✓							✓					
✓																
✓				✓							✓					
✓				✓							✓					

NEW FOR 2024

TWIDDY

Practical, light, convenient... we could go on, but it's when you turn on the tap that Twiddy outdoes itself. Because Claber's new extendable hose doubles in length when water passes through it, to reach any point you want. It can be handled without ever getting twisted, thanks to the special technology and the anti-kink fittings.
Pleasant to the touch, Twiddy exceeds all expectations.



2X EXTENDABLE

TWIDDY

Exceeding all expectations

ULTRALIGHT
AND COMPACT



QUICK-CLICK
FITTINGS WITH
ANTI-KIK END



COMES WITH MULTIJET
SPRAY NOZZLE



NEW FOR 2024

TWIDDY 15 m

9336





Extendable hose with accessories. As water flows through the hose, it extends to up to twice its length at the ideal pressure of 3 bar - max. length 15 m).
After use it shrinks back by itself to its original size.
Super-light, it's ideal for non-intensive uses like camping, sailing, gardens and terraces.
Quick-Click fittings with anti-kink flexible end for easy use in any direction.
Resistant to UV rays. Multifunction spray nozzle featuring 5 patterns: shower, jet, mist, cone and flat (+ 1 OFF).
Working temperature from -10 to + 50°C.
Max. working pressure: 5 bar.

code	pack	q.ty	(cm) dim. pack	(cm) dim. box	(m^3) volume	weight (kg)	pcs/pallet	
9336		6	27 x 19 x 13	57 x 20,5 x 17	0,046	6,75	96	8 000625 093366

NEW FOR 2024

TWIDDY 25 m

9337





Extendable hose with accessories. As water flows through the hose, it extends to up to twice its length at the ideal pressure of 3 bar - max. length 25 m).
After use it shrinks back by itself to its original size.
Super-light, it's ideal for non-intensive uses like camping, sailing, gardens and terraces.
Quick-Click fittings with anti-kink flexible end for easy use in any direction.
Resistant to UV rays. Multifunction spray nozzle featuring 5 patterns: shower, jet, mist, cone and flat (+ 1 OFF).
Working temperature from -10 to + 50°C.
Max. working pressure: 5 bar.

code	pack	q.ty	(cm) dim. pack	(cm) dim. box	(m^3) volume	weight (kg)	pcs/pallet	
9337		4	27 x 19 x 18	57 x 20,5 x 17	0,046	6,61	64	8 000625 093373

TOP-LIGHT HOSES

Top-Light is Claber's new incredibly light garden hose.
Thanks to the innovative material it is made of, Top-Light does not bend or become blocked, therefore ensuring the constant and continuous passage of water in any situation. Top-Light is non-toxic, free from phthalates, BPA and heavy metals, and is 100% recyclable. The first garden hose of its type.




TOP-LIGHT


The lightest garden hose ever

INCREDIBLY LIGHT

WATER NON-STOP

SPECIAL ANTI-KINK STRUCTURE

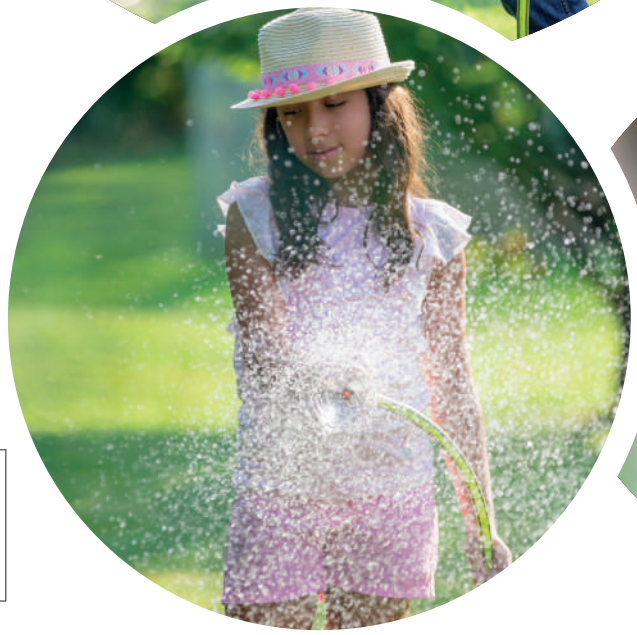

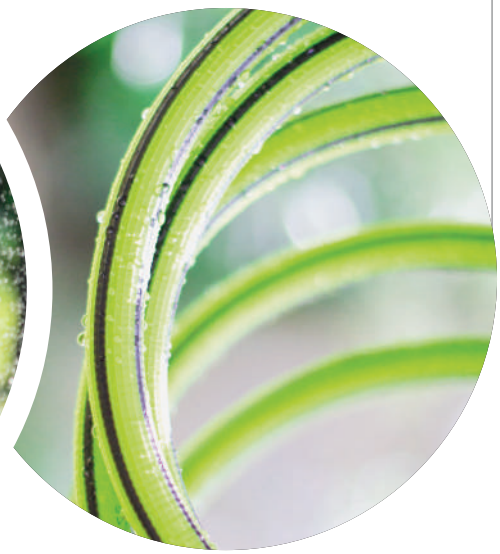

TOP-LIGHT Ø 1/2" 10 m

9340

LIMITED STOCK





Lightweight hose, easy to handle and resistant to kinks, torsion and UV rays. Ideal to ensure an easy and convenient watering on terraces and gardens. Non-toxic (free from phthaltes, BPA and heavy metals), Top-Light is made from high quality materials and is fully recyclable. Working pressure 0-4 bar. Diameter: int. 12,5 mm, external 17,4 mm.
Supplied with two automatic couplings, included in the pack.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9340		1	24 x 24 x 11	24 x 24 x 11	0,006	0,78	150	8 000625 093403

TOP-LIGHT Ø 1/2" 15 m

9341

LIMITED STOCK





Lightweight hose, easy to handle and resistant to kinks, torsion and UV rays. Ideal to ensure an easy and convenient watering on terraces and gardens. Non-toxic (free from phthaltes, BPA and heavy metals), Top-Light is made from high quality materials and is fully recyclable. Working pressure 0-4 bar. Diameter: int. 12,5 mm, external 17,4 mm.
Supplied with two automatic couplings, included in the pack.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9341		1	24 x 24 x 14	24 x 24 x 14	0,008	1,30	108	8 000625 093410

TOP-LIGHT Ø 1/2" 25 m

9342

LIMITED STOCK





Lightweight hose, easy to handle and resistant to kinks, torsion and UV rays. Ideal to ensure an easy and convenient watering on terraces and gardens. Non-toxic (free from phthaltes, BPA and heavy metals), Top-Light is made from high quality materials and is fully recyclable. Working pressure 0-4 bar. Diameter: int. 12,5 mm, external 17,4 mm.
Supplied with two automatic couplings, included in the pack.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9342		1	24 x 24 x 21	24 x 24 x 21	0,012	1,80	75	8 000625 093427

TOP-LIGHT Ø 3/4" 15 m

9357

LIMITED STOCK





Lightweight hose, easy to handle and resistant to kinks, torsion and UV rays. Ideal to ensure an easy and convenient watering on terraces and gardens. Non-toxic (free from phthaltes, BPA and heavy metals), Top-Light is made from high quality materials and is fully recyclable. Working pressure 0-4 bar. Diameter: int. 18 mm, external 23 mm.
Supplied with two automatic couplings, included in the pack.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9357		1	27 x 27 x 19	27 x 27 x 19	0,013	1,70	60	8 000625 093571

TOP-LIGHT Ø 3/4" 25 m

9358

LIMITED STOCK





Lightweight hose, easy to handle and resistant to kinks, torsion and UV rays. Ideal to ensure an easy and convenient watering on terraces and gardens. Non-toxic (free from phthaltes, BPA and heavy metals), Top-Light is made from high quality materials and is fully recyclable. Working pressure 0-4 bar. Diameter: int. 18 mm, external 23 mm.
Supplied with two automatic couplings, included in the pack.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9358		1	27 x 27 x 25	27 x 27 x 25	0,018	2,78	48	8 000625 093588

SPIRAL KIT

Spiral hose, tap connector and multifunction head or spray nozzle with adjustable jet: all in one package! Keep it close to hand whether in your garden, out on the terrace, at your holiday home, in your campervan or on your boat.
All Spiral Kit components have been designed to work perfectly and last.
The hose undergoes a special treatment during production, meaning it always returns to its compact spiral shape, making it easy to store away tidily in its wall bracket.





FLEXIBLE
IRRIGATION

Spiral Kit is a simple, practical and efficient solution for all gardening and washing tasks taking up minimal space.





		9034 10 m	9338 15 m
Flow rate (l/min)	2 bar	9,9 l/min	8,70 l/min
	3 bar	12,30 l/min	11,00 l/min
	4 bar	14,50 l/min	12,90 l/min
	6 bar	18,45 l/min	16,60 l/min

SPIRAL KIT BASIC 10 m

9034





Spiral hose ideal for use on balconies, terraces, small gardens, boats and camp sites.
Thanks to the quality of the materials and the spiral memory, the hose will always regain its original shape after use.
The kit comprises: 10 metres spiral hose, 3/4" (20-27 mm) threaded tap connector, automatic coupling, automatic coupling with Aquastop, spray nozzle,wall bracket with screws and plugs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9034		6	10,5 x 59 x 10,5	39 x 59 x 26	0,060	6,20	72	8 000625 090341

SPIRAL KIT PLUS 15 m

9338





Spiral hose ideal for use on balconies, terraces, small gardens, boats and camp sites.
Thanks to the quality of the materials and the spiral memory, the hose will always regain its original shape after use.
The kit comprises 15 metres spiral hose, 3/4" (20-27 mm) threaded tap connector, automatic coupling, automatic coupling with Aquastop, multifunction spray lance with 4 different jets (shower, concentrated, aerated, mist + 1 position OFF), wall bracket with screws and plugs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9338		3	23 x 53 x 11,5	39 x 59 x 26	0,060	4,60	36	8 000625 093380

STARTER GARDEN-SET

9053



Kit including:
- 20 mt 9-13 mm hose
- 3/4" (20-27 mm) tap connector and 1/2" (15-21 mm) adaptor
- 1 pc 9-13 mm automatic coupling
- 1 pc 9-13 mm automatic coupling w/stop
- 1 pc multifunction pistol.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9053		1	35 x 35 x 8,5	35 x 35 x 8,5	0,010	2,16	64	8 000625 090532

9-13 mm COUPLING

9025





Automatic coupling for Ø 9-13 mm hose.
Compatible with:
- Spiral Kit (9034) and Spiral Kit Plus (9338)
- Mini-set Balcony (9031) and Utility (9028)
- Starter Garden-Set (9053).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9025		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,50	1440	8 000625 090259

9-13 mm COUPLING W/AQUASTOP

9026





Automatic coupling with aquastop for Ø 9-13 mm hose.
Compatible with:
- Spiral Kit (9034) and Spiral Kit Plus (9338)
- Mini-Set Balcony (9031) and Utility (9028)
- Starter Garden-Set (9053).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
9026		10	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,60	1440	8 000625 090266



DRIP IRRIGATION

THE MICRO-IRRIGATION EVOLUTION

Claber has designed a series of impressive solutions to help you set up an easy, made-to-measure micro-irrigation system.

Claber has taken inspiration from nature and natural rainfall, to create irrigation systems which provide each plant with the right amount of water, without wasting a drop.

The core of a micro-irrigation system is the wide range of battery-operated timers, flexible and easy to use like no other, distributing the amount of water each plant needs, when it needs it.

Claber has covered all the requirements, with independent systems that can run for long periods without needing any taps or an electrical power supply – a real revolution that sets you free! Whether on your balcony or terrace, in your garden or vegetable patch, even at home or at work, Claber is always the right choice.



Never compromise on your passion for green.

Water your plants in the best possible way.



CAREFREE IRRIGATION

As the technological core of Claber systems, the easy-to-use and reliable timers allow you to manage your system according to an accurate, well-calibrated irrigation schedule. From the simplest models with preset programmes, to those with customisable features, there is the perfect timer model for everybody.



DROP BY DROP

Claber drippers provide constant, accurate and gentle watering. The drops are distributed near the roots of each plant, keeping them happy and healthy, without wasting water.




SPRING RAIN

RainJet micro-sprinklers can be used to distribute a water spray or delicate jet over a specific area with a great level of accuracy.



THERE FOR YOU, EVEN WHEN YOU'RE NOT

Aqualux System is the solution for watering your house plants while you are away for short or long periods.
This discrete, efficient drip irrigation system lets you travel carefree.

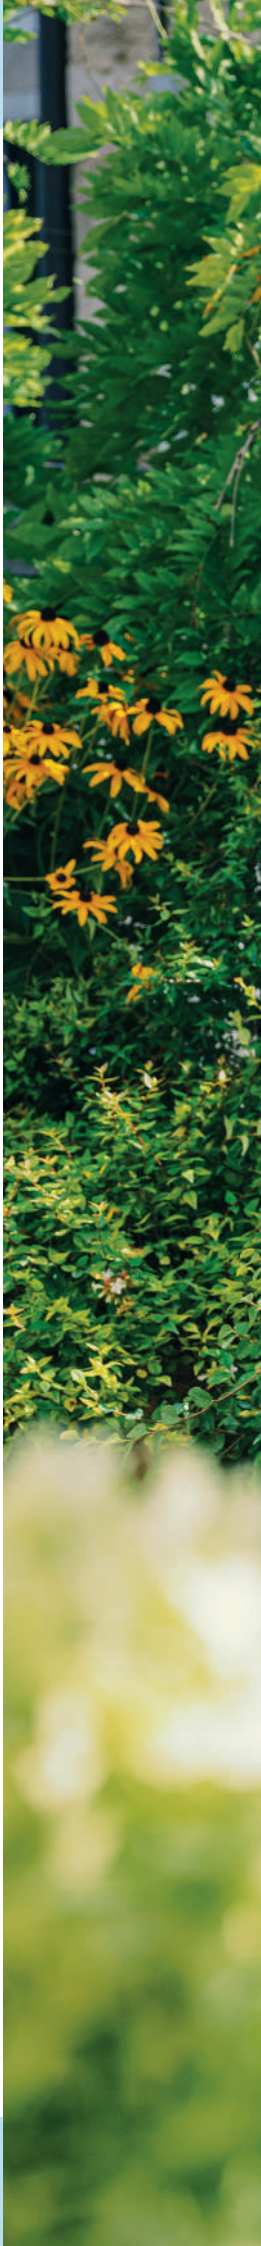



IRRIGATION THAT HITS THE SPOT

As the most delicate form of irrigation, this system provides delicate drops or a water spray for the plants you love. The most innovative solutions, making sure you don't have to give up on greenery, even when you are away. No matter where you are now or where you are going, Claber will take care of your green space.

AQUAUNO® TIMERS

Efficient and versatile, Aquauno timers provide the simplest solution to manage watering requirements at the best time and with just the right amount of water. Suitable for your patio, garden or vegetable patch, they are connected directly to the tap and are battery operated, hence no plumbing or electrical connections are needed. The protective cover, perfectly sealed electronic circuits and certified quality guarantee the utmost reliability.
Thanks to their compact size, they can also be installed in narrow spaces.



AQUAUNO PRATICO

8425





It's easy to use. Simply press the green button to start the program, then the red button when watering is sufficient.
Pratico memorises the time that has elapsed between the two operations and repeats the program (maximum duration 60 minutes) at the same time every day.
A led indicates all programming phases and can display the times you have set at any moment.
You can also set the watering times with a simple pulse code using the same two buttons and the led.
The unit is fitted with a washable stainless steel filter. 3/4" (20-27 mm) tap connector.
It runs off a single 9 V alkaline battery which lasts the entire season.
The electronic components are perfectly sealed.
Operating water pressure from 0,5 to 10 bar.
100% checked and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	14	19	27	30	33	38	42

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8425		2	7 x 14,8 x 20,5	19 x 16,5 x 16	0,005	1,09	280	8 000625 084258

AQUAUNO LOGICA

8422





An automatic one-line water timer containing 15 preset cycles, selected using an exclusive control rotary knob.
Simply by turning the knob to any one of the 15 numbered notches you can set the program required in a matter of seconds.
All the programs available are summarized in a diagram printed on the cover.
The unit is fitted with a washable stainless steel filter. 3/4" (20-27 mm) tap connector.
One 9 V alkaline battery can power the unit for an entire season.
The electronic components are perfectly sealed.
With an operating pressure range of 0,5 to 10 bar, Aquauno Logica is 100% quality controlled and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	14	19	27	30	33	38	42

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8422		2	7 x 14,8 x 20,5	19 x 16,5 x 16	0,005	1,00	280	8 000625 084227

AQUAUNO SELECT

8423





One-way automatic timer. 63 preset programmes (+ off and 5-minute test).
Easy programming by way of 2 knobs: one with 7 frequencies, the other with 9 watering times; simply turn the knobs for the required setting.
Equipped with washable filter. 3/4" (20-27 mm) tap connector.
Powered by a 9V alkaline battery, which will last an entire season.
Electronic components are perfectly sealed.
Operating pressure from 0,5 to 10 bar.
100% checked and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	14	19	27	30	33	38	42

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8423		2	7 x 14,8 x 20,5	19 x 16,5 x 16	0,005	1,10	280

8 000625 084234

AQUAUNO VIDEO-2

8428





Using this automatic one-line water timer you can set 2 watering cycles a day.
Featuring just three buttons for easy programming, the large display clearly communicates to the user all the information required by means of easy-to-understand symbols and numbers.
2 Water cycle times vary from 1 min to 23 hours and 59 min.
Weekly watering cycles may also be programmed with the exception of the days you wish to omit. It is also possible to display the cycles programmed and delete those cycles no longer required.
The unit is fitted with a washable stainless steel filter. 3/4" (20-27 mm) tap connector.
One 9 V alkaline battery can power the unit for an entire season (complete with digital battery status indicator).
The electronic components are perfectly sealed.
With an operating pressure range of 0,5 to 10 bar, Aquauno Video-2 is 100% quality controlled and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	14	19	27	30	33	38	42

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8428		2	7 x 14,8 x 20,5	19 x 16,5 x 16	0,005	1,03	280

8 000625 084289

AQUAUNO MIST

8496





Automatic one-way timer, ideal for cyclical automation of both Happy Fresh cooling systems and watering systems on the terrace and in the garden.
Easy programming with 2 rotary knobs: one to set the frequency and the other to select the run time. 27 programs can be selected for drip systems (yellow sector, run time from 2 to 90 mins every 12, 24 or 48 hours), 24 possible combinations for Happy Fresh systems (blue quadrant, run time from 5 to 45 seconds, every 1, 3, 5, 10 mins).
Option of 5 min test function.
Equipped with washable filter. Works with 9 V alkaline battery.
Electronic part perfectly sealed.
Operating pressure from 0,5 to 10 bars.
100% checked and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	14	19	27	30	33	38	42

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8496		2	7 x 14,8 x 20,5	19 x 16,5 x 16	0,005	1,10	280

8 000625 084968

AQUAUNO LOGICA PLUS

8419





An automatic one-line water timer containing 15 preset cycles, selected using an exclusive control rotary knob.
Simply by turning the knob to any one of the 15 numbered notches you can set the program required in a matter of seconds.
All the programs available are summarized in a diagram printed on the cover.
A led lights up when the timer is in operation.
The unit is fitted with a washable stainless steel filter. 3/4" (20-27 mm) tap connector.
One 9 V alkaline battery can power the unit for an entire season.
The electronic components are perfectly sealed.
With an operating pressure range of 0,5 to 10 bar, Aquauno Logica Plus is 100% quality controlled and tested.
Designed for direct connection to the Rain Sensor (90915).

Bar	0,5	1	2	2,5	3	4	5
l/min	17	22	31	34	37	38	46

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8419		2	8,2 x 12,8 x 23,5	27 x 25 x 9,5	0,006	1,27	192	8 000625 084197

AQUAUNO VIDEO-2 PLUS

8412





Using this automatic one-line water timer you can set 2 watering cycles a day.
Featuring just three buttons for easy programming, the large display clearly communicates to the user all the information required by means of easy-to understand symbols and numbers.
2 Water cycle times vary from 1 min to 23 hours and 59 min.
Weekly watering cycles may also be programmed with the exception of the days you wish to omit. It is also possible to display the cycles programmed and delete those cycles no longer required.
The unit is fitted with a washable stainless steel filter. 3/4" (20-27 mm) tap connector.
One 9 V alkaline battery can power the unit for an entire season (complete with digital battery status indicator) the electronic components are perfectly sealed.
With an operating pressure range of 0,5 to 10 bar, Aquauno Video-2 Plus is 100% quality controlled and tested.
Designed for direct connection to the Rain Sensor (90915).

Bar	0,5	1	2	2,5	3	4	5
l/min	17	22	31	34	37	38	46

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8412		2	8,2 x 12,8 x 23,5	27 x 25 x 9,5	0,006	1,34	192	8 000625 084128

AQUAUNO VIDEO-6 PLUS

8413





Using this automatic one-line water timer you can set 6 watering cycles a day.
Featuring just three buttons for easy programming, the large display clearly communicates to the user all the information required by means of easy-to understand symbols and numbers.
6 Water cycle times vary from 1 min to 23 hours and 59 min.
Weekly watering cycles may also be programmed with the exception of the days you wish to omit. It is also possible to display thecycles programmed and delete those cycles no longer required.
The unit is fitted with a washable stainless steel filter. 3/4" (20-27 mm) tap connector.
One 9 V alkaline battery can power the unit for an entire season (complete with digital battery status indicator) the electronic components are perfectly sealed.
With an operating pressure range of 0,5 to 10 bar, Aquauno Video-6 Plus is 100% quality controlled and tested.
Designed for direct connection to the Rain Sensor (90915).

Bar	0,5	1	2	2,5	3	4	5
l/min	17	22	31	34	37	38	46

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8413		2	8,2 x 12,8 x 23,5	27 x 25 x 9,5	0,006	1,32	192	8 000625 084135

AQUADUE DUPLO EVOLUTION

8410





Automatic two-way water timer.
Provides up to three irrigations a day for each line.
Featuring just three buttons for easy programming, the large display clearly communicates to the user all the information required by means of easy-to-understand symbols and numbers.
Water cycle times vary from 1 min to 23 hours and 59 min.
Weekly watering cycles may also be programmed with the exception of the days you wish to omit. It is also possible to display the cycles programmed and delete those cycles no longer required. The unit is fitted with a stainless steel filter. 3/4" (20-27 mm) tap connector.
Manual control function, selectable duration 15-60 min. Setting of current day.
One 9 V alkaline battery can power the unit for an entire season (complete with digital battery status indicator). The electronic components are perfectly sealed.
Designed for direct connection to the Rain Sensor (90915).
With an operating pressure range of 0,5 to 10 bar, Aquadue Duplo is 100% quality controlled and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	14	19	27	30	33	38	42

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8410		2	10 x 12,7 x 24	28 x 25 x 13	0,008	1,80	144

8 000625 084104

RAIN SENSOR

90915





Suitable for all watering systems, the rain sensor avoids unnecessary wastage of water by turning the sprinklers off when it is raining.
When the internal flow reaches a level of 5 mm of rain per square metre, the system shuts down.
Programmed watering automatically resumes when the water in the sensor evaporates.
The rain sensor should be installed in an outdoor area exposed to rain using the stainless steel bracket provided.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90915		2	8,5 x 11 x 20,5	25 x 19 x 10	0,005	0,64	288

8 000625 909155

SPARE 3/4" (20-27 mm) F CONNECTOR

91006





Replacement tap connector for Aquauno and Aquadue water timers.
Comprises:
- 3/4" (20-27 mm) female tap connector
- washable filter
- ring nut
- o.ring.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
91006		10	7,9 x 15,7 x 3,0	25 x 19 x 10	0,005	0,55	1440

8 000625 910069





TEMPO TIMERS AND DUAL

A backlit LCD display, better protection against weather, immediate or delayed start and connection to the Rain Sensor (with or without wires) are just some of the strengths of this innovative family of digital timers. Tempo and Dual featuring 1 or 2 irrigation lines meet every requirement, thanks to the wide range of programming options in the Select range and the choice of preset solutions in the Logic range. The Tempo Hybrid timer completes the range and is equipped with a photovoltaic panel that makes use of the inexhaustible supply of clean solar energy.



TEMPO HYBRID

LIMITED STOCK

8487





One-way automatic timer. Equipped with a built-in photovoltaic panel, this timer is powered by solar energy even without the panel being exposed directly to sunlight. Watering times from 5 seconds to 1 minute and 1 minute to 90 minutes. Up to 4 watering cycles per day. Backlit LCD screen ensuring high visibility under all conditions. Manual on/off button (variable 15-minute test). Electronic components fully insulated, no wires exposed to view. 3/4" (20-27 mm) tap connector with pivoting ring nut. Washable filter. 1.5V AA alkaline battery guarantees continued operation in the event of prolonged light deficiency. Operating pressure 0,5 - 10 bar. Can be connected to standard Rain Sensor (90915) or to RF Rain Sensor (90831) by way of optional interface (8480). 100% checked and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	12	17	23	25	27	30	33

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8487		2	9 x 12 x 23	38 x 17 x 13	0,008	1,40	160	8 000625 084876

TEMPO LOGIC

8483





One-way automatic water timer. Powered by 2 x 1.5 V AA alkaline batteries, fitted in a rainproof socket. Easy programming with a single digital button. 19 preset programmes (+ off), listed on the front cover. Backlit LCD screen displaying the different functions. Start button allowing immediate or delayed (up to 23 hours) start. On/off button for manual function (5-minute test). Electronic components fully insulated, no wires exposed to view. 3/4" (20-27 mm) tap connector with pivoting ring nut. Washable filter.
Operating pressure 0,5 - 10 bar. Can be connected to standard Rain Sensor (90915) or to wireless RF Rain Sensor (90831) - with optional interface (8480). 100% checked and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	12	17	23	25	27	30	33

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8483		2	9 x 12 x 23	25 x 19 x 10	0,005	1,40	252	8 000625 084838

TEMPO SELECT

8486





One-way automatic water timer. Powered by 2 x 1.5 V AA alkaline batteries, fitted in a rainproof socket. Easy programming with two digital buttons, one selecting 14 watering times, the other 7 frequencies for each line. 98 possible programmes (+ off). Backlit LCD screen displaying the different functions. Start button allowing immediate or delayed (up to 23 hours) start. On/off button for manual function (5-minute test). Electronic components fully insulated, no wires exposed to view. 3/4" (20-27 mm) tap connector with pivoting ring nut. Washable filter.
Operating pressure 0,5 - 10 bar.
Can be connected to standard Rain Sensor (90915) or to wireless RF Rain Sensor (90831) - with optional interface (8480). 100% checked and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	12	17	23	25	27	30	33

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8486		2	9 x 12 x 23	25 x 19 x 10	0,005	1,40	252	8 000625 084869

DUAL LOGIC

8485





Two-way automatic water timer, with watering on two independent lines.
Powered by 2 x 1.5 V AA alkaline batteries, fitted in a rainproof socket.
Easy programming with a single digital button. 19 preset programmes (+ off) for each line, listed on the front cover.
Backlit LCD screen displaying the different functions. Start button allowing immediate or delayed (up to 23 hours) start, on both lines.
On/off button for manual function (5-minute test).
Electronic components fully insulated, no wires exposed to view.
3/4" (20-27 mm) tap connector with pivoting ring nut. Washable filter.
Operating pressure 0,5 - 10 bar. Can be connected to standard Rain Sensor (90915) or to wireless RF Rain Sensor (90831) - with optional interface (8480). 100% checked and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	16	20	28	30	32	38	42

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8485		2	16 x 12 x 23	38 x 17 x 13	0,008	2,00	160	8 000625 084852

DUAL SELECT

8488





Two-way automatic water timer, with watering on two independent lines.
Powered by 2 x 1.5 V AA alkaline batteries, fitted in a rainproof socket.
Easy programming with two digital buttons: one selecting 14 watering times, the other 7 frequencies for each line. 98 possible programmes (+ off) for each line. Backlit LCD screen showing the different functions.
Start button allowing immediate or delayed (up to 23 hours) start on both lines.
On/off button for manual function (5-minute test). Electronic components fully insulated, no wires exposed to view. 3/4" (20-27 mm) tap connector with pivoting ring nut. Washable filter.
Operating pressure 0,5 - 10 bar. Can be connected to standard Rain Sensor (90915) or to wireless RF Rain Sensor (90831) - with optional interface (8480). 100% checked and tested.

Bar	0,5	1	2	2,5	3	4	5
l/min	16	20	28	30	32	38	42

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8488		2	16 x 12 x 23	38 x 17 x 13	0,008	2,00	160	8 000625 084883

RAIN SENSOR RF

90831





Rain sensor operating on radio frequency. Suspends watering in case of rainfall.
Dialogues with Tempo and Dual timers, the radio frequency system and Hydro-4.
The RF Rain Sensor is designed for open air installation, exposed to rainfall, using a special stainless steel bracket supplied with the product.
No electrical connections are required: RF coverage up to 30 m.
Powered by 2 x 1.5 V AA alkaline batteries.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90831		1	8,5 x 11 x 20,5	8,5 x 11 x 20,5	0,002	0,26	288	8 000625 908318

RF RAIN SENSOR INTERFACE

8480





Connection interface for RF Rain Sensor (90831), used with Dual and Tempo water timers.
In case of rainfall, watering is suspended by radio control, without any use of electrical connections. RF coverage up to 30 m.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8480		2	8 x 15 x 15	13 x 19 x 10	0,001	0,08	648	8 000625 084807

NEW FOR 2024

MYAQUASOLAR TEMPO AND DUAL TIMERS

myAquaSolar is the first and only smart timer that, thanks to its latest-generation photovoltaic panel, works without batteries and without needing direct, constant exposure to the sun. Indirect light is enough to power the timer perfectly. myAquaSolar is available in versions with one or two irrigation lines and can be conveniently programmed right from your smartphone via Bluetooth®, using the intuitive myAquaSolar app.



MYAQUASOLAR

Naturally innovative

NO BATTERY
100% SOLAR ENERGY

Bluetooth®





SMART PROGRAMMING WITH THE MYAQUASOLAR APP

GET IT ON Google Play

DOWNLOAD ON THE Apple Store

myAquaSolar

FREE DOWNLOAD WITH NO SUBSCRIPTION COSTS, AVAILABLE FOR SMARTPHONES.

NEW FOR 2024

TEMPO MYAQUASOLAR

8497





One-way automatic water timer. Equipped with a built-in photovoltaic panel, this timer is powered by solar energy even without the panel being exposed directly to sunlight. No batteries required. Easy programming with Bluetooth® technology and Claber myAquaSolar app. 2 fully customisable programmes. Button to turn off the timer and start manual function (that can also be activated from app). Weekly watering cycles may also be programmed with the exception of the days you wish to omit. Electronic components fully insulated.
3/4" (20-27 mm) tap connector with pivoting ring nut. Washable filter.
Operating pressure 0,5 - 10 bar. Can be connected to standard Rain Sensor (90915).
100% checked and tested.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8497		2	11,8 x 21 x 11,5	28 x 25 x 13	0,009	1,25	144	8 000625 084975

NEW FOR 2024

DUAL MYAQUASOLAR

8498





Two-way automatic water timer, with watering on two independent lines. Equipped with a built-in photovoltaic panel, this timer is powered by solar energy even without the panel being exposed directly to sunlight. No batteries required. Easy programming with Bluetooth® technology and Claber myAquaSolar app. 2 fully customisable programmes per line.
Button to turn off the timer and start manual function (that can also be activated from app). Weekly watering cycles may also be programmed with the exception of the days you wish to omit. Electronic components fully insulated.
3/4" (20-27 mm) tap connector with pivoting ring nut. Washable filter.
Operating pressure 0,5 - 10 bar. Can be connected to standard Rain Sensor (90915).
100% checked and tested.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8498		2	15 x 21 x 11,5	38 x 17 x 13	0,008	1,70	160	8 000625 084982



TIMERS	AQUAUNO					AQUAUNO PLUS
						
CODE	**8422**	**8423**	**8425**	**8428**	**8496**	**8419**
DESCRIPTION	**AQUAUNO LOGICA**	**AQUAUNO SELECT**	**AQUAUNO PRATICO**	**AQUAUNO VIDEO-2**	**AQUAUNO MIST**	**AQUAUNO LOGICA PLUS**
Power supply	**1 x** 9V 9V ALKALINE	**1 x** 9V 9V ALKALINE	**1 x** 9V 9V ALKALINE	**1 x** 9V 9V ALKALINE	**1 x** 9V 9V ALKALINE	**1 x** 9V 9V ALKALINE
Inlet thread	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)
Outlet thread	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)
No. of ways	1	1	1	1	1	1
Display	NO	NO	NO	YES	NO	NO
Backlighting	NO	NO	NO	NO	NO	NO
Min./max. pressure	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar
Operating temperature	3°C - 50°C	3°C - 50°C	3°C - 50°C	3°C - 50°C	3°C - 50°C	3°C - 50°C
Controls	Rotary knob	2 rotary knobs	2 buttons	3 buttons	2 rotary knobs	Rotary knob
No. of programmes	15, preset	63 settable programmes (combining times and frequencies)	1	2	51 settable programmes (combining times and frequencies)	15, preset
Irrigation duration	1 - 60 mins	1 - 60 mins	1 - 60 mins	1min - 23 h 59 mins	2-90 min (watering) 5-45 sec (cooling)	1 - 60 mins
Watering frequency	from 2 per day to 1 per week	from 3 per day to 1 per week	1 per day	up to 2 per day	12-24-48 h (watering) 1-3-5-10 min (cooling)	from 2 per day to 1 per week
Weekly programming	NO	NO	NO	YES	NO	NO
Manual mode	NO	YES	NO	YES	SI	NO
Duration of manual irrigation	NO	15 mins (early stop possible)	NO	15 mins (early stop possible)	5 mins (early stop possible)	NO
Delayed start	NO	NO	NO	You set the start time	NO	NO
Watering in progress indicator	NO	LED	NO	YES	LED	LED
Power supply disconnected	NO	NO	LED	YES (set programme number flashes)	NO	NO (flashes once every 2 secs to indicate watering under way or waiting to start)
Rain Sensor connection	NO	NO	NO	NO	NO	YES, with wired rain sensor (90915)
Warranty	3 years	3 years	3 years	3 years	3 anni	3 years

	AQUAUNO PLUS		AQUADUE	TEMPO			DUAL		MYAQUASOLAR	
										
	8412	8413	8410	8483	8486	8487	8485	8488	8497	8498
	AQUAUNO VIDEO-2 PLUS	AQUAUNO VIDEO-6 PLUS	AQUADUE DUPLO EVOLUTION	TEMPO LOGIC	TEMPO SELECT	TEMPO HYBRID	DUAL LOGIC	DUAL SELECT	TEMPO MYAQUASOLAR	DUAL MYAQUASOLAR
	1 x 9V ALKALINE	1 x 9V ALKALINE	1 x 9V ALKALINE	2 x AA 1,5V ALKALINE	2 x AA 1,5V ALKALINE	photovoltaic panel +1 x AA 1,5V ALKALINE	2 x AA 1,5V ALKALINE	2 x AA 1,5V ALKALINE	photovoltaic panel	photovoltaic panel
	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm) Swivel ring nut	3/4" (20 x 27 mm) Swivel ring nut	3/4" (20 x 27 mm) Swivel ring nut	3/4" (20 x 27 mm) Swivel ring nut	3/4" (20 x 27 mm) Swivel ring nut	3/4" (20 x 27 mm) Swivel ring nut	3/4" (20 x 27 mm) Swivel ring nut
	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	1/2" (15 x 21 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)	3/4" (20 x 27 mm)
	1	1	2	1	1	1	2	2	1	2
	YES	YES	YES	YES	YES	YES	YES	YES	NO	NO
	NO	NO	NO	YES	YES	YES	YES	YES	NO	NO
	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar	0,5 - 10 bar
	3°C - 50°C	3°C - 50°C	3°C - 50°C	3°C - 50°C	3°C - 50°C	3°C - 50°C	3°C - 50°C	3°C - 50°C	3°C - 50°C	3°C - 50°C
	3 buttons	3 buttons	3 buttons	3 buttons	4 buttons	6 buttons	3 buttons	4 buttons	myAquaSolar app	myAquaSolar app
	2	6	up to 3 irrigation cycles per line	19 preset (+ off)	98 settable programmes per line (combining times and frequencies)	4	19 preset (+ off) per line	98 settable programmes per line (combining times and frequencies)	2	2 per line
	1min - 23 h 59 mins	1min - 23 h 59 mins	1min - 23 h 59 mins	1 -90 mins	1 - 90 mins	5 sec - 90 mins	1 - 90 mins	1 - 90 mins	1 min - 3h 59 min	1 min - 3h 59 min
	up to 2 per day	up to 6 per day	up to 3 per day per line	from 3 per day to 1 per week	from 3 per day to 1 per week	up to 4 per day	from 3 per day to 1 per week	from 3 per day to 1 per week	from 2 per day to 1 per week	up to 2 per day per line, to 1 per week
	YES	YES	YES	NO	NO	YES	NO	NO	YES	YES
	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
	15 mins (early stop possible)	15 mins (early stop possible)	min. 15 mins - max. 60 mins (early stop possible)	5 mins (early stop possible)	5 mins (early stop possible)	settable 5 secs-90 mins (early stop possible)	5 mins (early stop possible)	5 mins (early stop possible)	settable 1 min - 3h 59 min	settable 1 min - 3h 59 min
	You set the start time	You set the start time	You set the start time	YES, up to 23 hours	YES, up to 23 hours	You set the start time	YES, up to 23 hours	YES, up to 23 hours	You set the start time	You set the start time
	YES	YES	YES	YES	YES	YES	YES	YES	YES, from the app	YES, from the app
	YES (set programme number flash)	YES (set programme number flash)	YES (set programme number flash)	YES	YES	YES	YES	YES	YES, from the app	YES, from the app
	YES, with wired rain sensor (90915)	YES, with wired rain sensor (90915)	YES, with wired rain sensor (90915)	YES, with wired rain sensor (90915) or radio frequency (90831) with optional interface (8480)	YES, with wired rain sensor (90915) or radio frequency (90831) with optional interface (8480)	Yes, with wired rain sensor (90915) or radio frequency (90831) with optional interface (8480)	Yes, with wired rain sensor (90915) or radio frequency (90831) with optional interface (8480)	Yes, with wired rain sensor (90915) or radio frequency (90831) with optional interface (8480)	YES, with wired rain sensor (90915)	YES, with wired rain sensor (90915)
	3 years	3 years	3 years	3 years	3 years	3 years	3 years	3 years	3 years	3 years

FEEDING, MAIN AND DRIPPER TUBES



Sturdy, algae- and UV-resistant: with Claber's main and feeding hoses, you can easily create any drip irrigation or micro-irrigation system. To help you water hedges, borders and flowerbeds easily and uniformly, Claber offers dripper and soaker hoses.
Simply connect up the hose to the tap and start saving time and precious water right away! Alternatively, why not use them with a Claber battery-operated timer to water your plants at the ideal time with just the right amount of water?

FEEDING TUBE 5 m

90371



1/4" (4 - 6 mm) tube for branching off the main tube.
Supplies the in-line and end-of-line drippers.
Flexible and resistant to algae formation, low temperatures and solar radiation.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90371		14	14 x 3,5 x 14	28 x 25 x 19	0,013	1,48	672	8 000625 903719

FEEDING TUBE 20 m

90370



1/4" (4 - 6 mm) tube for branching off the main tube.
Supplies the in-line and end-of-line drippers.
Flexible and resistant to algae formation, low temperatures and solar radiation.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90370		5	18 x 5,5 x 18	28 x 25 x 19	0,013	1,85	240	8 000625 903702

FEEDING TUBE 20 m GREEN

90375



1/4" (4 - 6 mm) tube for branching off the main tube.
Supplies the in-line and end-of-line drippers.
Flexible and resistant to algae formation, low temperatures and solar radiation.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90375		5	18 x 5,5 x 18	28 x 25 x 19	0,013	1,85	240	8 000625 903757

MAIN TUBE 15 m

90362



1/2" (13 - 16 mm) polyethylene tube for the main line.
Flexible and resistant to algae formation, low temperatures and solar radiation.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90362		1	Ø 40 x 8	Ø 40 x 8	0,010	1,00	72

8 000625 903627

MAIN TUBE 25 m

90365



1/2" (13 - 16 mm) polyethylene tube for the main line.
Flexible and resistant to algae formation, low temperatures and solar radiation.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90365		1	Ø 42 x 10	Ø 42 x 10	0,014	1,65	60

8 000625 903658

MAIN TUBE 25 m WHITE

90368



1/2" (13 - 16 mm) polyethylene tube for the main line.
Flexible and resistant to algae formation, low temperatures and solar radiation.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90368		1	Ø 42 x 10	Ø 42 x 10	0,014	1,65	60

8 000625 903689

MAIN TUBE 50 m

90366



1/2" (13 - 16 mm) polyethylene tube for the main line.
Flexible and resistant to algae formation, low temperatures and solar radiation.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90366		1	Ø 44 x 15	Ø 44 x 15	0,023	3,07	28

8 000625 903665



1/4" DRIPPER TUBE 15 m

90353



1/4" (4-6 mm) polyethylene tube.
Fitted with internal 1,2 l/h labyrinth drippers at 30 cm intervals which ensure even irrigation over the entire cultivated area.
Reduced water consumption: operating 0,5 - 1 bar.

Bar	0,5	1,0	1,5	2,0
L/H	2,4	2,8	3,2	3,5



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90353		5	23 x 5 x 21,5	23 x 25 x 26	0,015	1,51	225	8 000625 903535

DRIPPER TUBE 25 m

90355



1/2" (13-16 mm) polyethylene tube.
Fitted with internal 2 l/h labyrinth drippers at 33 cm intervals which ensure even irrigation over the entire cultivated area.
Reduced water consumption: operating 0,5 - 2 bar.

Bar	0,5	1,0	1,5	2,0
L/H	1,8	2,3	2,7	3,1



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90355		1	Ø 50 x 9,5	Ø 50 x 9,5	0,023	1,61	32	8 000625 903559

DRIPPER TUBE 25 m BROWN

90356



1/2" (13-16 mm) polyethylene tube.
Fitted with internal 2 l/h labyrinth drippers at 33 cm intervals which ensure even irrigation over the entire cultivated area.
Reduced water consumption: operating 0,5 - 2 bar.

Bar	0,5	1,0	1,5	2,0
L/H	1,8	2,3	2,7	3,1



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90356		1	Ø 50 x 9,5	Ø 50 x 9,5	0,023	1,60	32	8 000625 903566

DRIPPER TUBE 50 m

90357



1/2" (13-16 mm) polyethylene tube.
Fitted with internal 2 l/h labyrinth drippers at 33 cm intervals which ensure even irrigation over the entire cultivated area.
Reduced water consumption: operating 0,5 - 2 bar.

Bar	0,5	1,0	1,5	2,0
L/H	1,8	2,3	2,7	3,1



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90357		1	Ø 60 x 12	Ø 60 x 12	0,033	2,88	12	8 000625 903573

2,1 L/H SELF-REGULATING DRIPPER TUBE 25 m

90354



1/2" (13-16 mm) polyethylene tube.
Fitted with internal labyrinth of 2,1 l/h self-regulating drippers at 33 cm intervals which ensure even irrigation over the entire cultivated area.
Reduced water consumption: operating 0,5 - 4 bar.

Bar	0,5	1,0	1,5	2,0	2,5
L/H	2,1	2,1	2,1	2,1	2,1



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90354		1	Ø 50 x 9,5	Ø 50 x 9,5	0,023	1,61	32	8 000625 903542



CLABER DRIPPER HOSES HAVE SMALL DRIPPERS POSITIONED AT REGULAR INTERVALS.



1/2" SOAKER HOSE 15 m

90350





Slowly diffuses the water through its capillary walls. Strong but flexible, designed to be laid around plants or with covering of soil. Continuous drainage even in freezing conditions. Suitable for low flow rates: operating pressure 0,5 - 2 bar.

Bar	0,5	1,0	1,5	2,0
L/Hxm	14	22	28	32

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90350		1	Ø 35 x 11	Ø 35 x 11	0,010	1,52	54

8 000625 903504

1/2" SOAKER HOSE 25 m

90351





Slowly diffuses the water through its capillary walls. Strong but flexible, designed to be laid around plants or with covering of soil. Continuous drainage even in freezing conditions. Suitable for low flow rates: operating pressure 0,5 - 2 bar.

Bar	0,5	1,0	1,5	2,0
L/Hxm	9	14	18	22

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90351		1	Ø 38 x 13	Ø 38 x 13	0,015	2,08	42

8 000625 903511

SOAKER HOSES ARE IDEAL FOR WATERING YOUR VEGETABLE PATCH EVENLY.





TRIPLE-SOAKER HOSES


For a practical and versatile irrigation experience, Claber presents Triply, a range of triple-soaker hoses equipped with regular micro-punctures and a double-sided core. Thanks to its triple line, the triple-soaker hose releases countless jets of water and can be used to spread a gentle, calibrated rain (with the holes facing up), or to ensure the right humidity of the earth (with the holes facing down). The Quick-Click socket ensures fast installation, making it the ideal partner for watering borders, flowerbeds and small vegetable patches or gardens.





THE IDEAL PARTNER

for watering borders, flowerbeds and small vegetable patches.

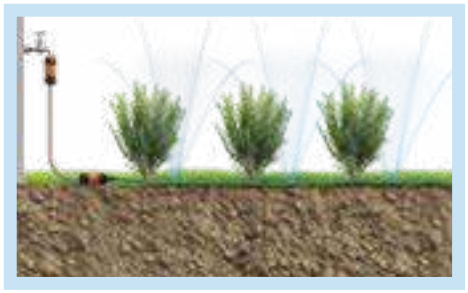



TRIPLY 7,5 m

90376





Triple-soaker hose with regular micro-punctures on one side. Laid out with the holes facing up, it releases countless jets. With the holes facing down it waters the ground by saturation.
Equipped with a Quick-Click socket to connect to the water outlet.
Operating pressure from 1 to 3 bar. Water flow rate: from 3 l/min to 8 l/min.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90376		3	31 x 4 x 29	40 x 13 x 40	0,02	2,43	108	8 000625 903764

TRIPLY 15 m

90377





Triple-soaker hose with regular micro-punctures on one side. Laid out with the holes facing up, it releases countless jets. With the holes facing down it waters the ground by saturation.
Equipped with a Quick-Click socket to connect to the water outlet.
Operating pressure from 1 to 3 bar. Water flow rate: from 5 l/min to 13 l/min.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90377		3	38 x 4 x 38	40 x 13 x 40	0,02	4,20	108	8 000625 903771

BLOCK-SYSTEM RAINJET®

BLOCK-SYSTEM CONNECTORS AND COUPLINGS: RAINJET EVOLUTION

A complete family of compression connectors and couplings for 1/2" hoses, bringing innovative features to the extensive range of RainJet drippers and accessories.
The special locking system with the characteristic Block-System ring nut has been designed to guarantee a perfect seal that lasts, with no water leakage and no risk of impurities entering the system. It helps to make any DIY system, like Colibrì micro-irrigation, even easier to set up.

PRESSURE REDUCER

91040





Automatically reduces and maintains inlet water pressure at a constant pressure of 1 bar (max. 10 bar).
Connects to 3/4" (20-27 mm) or 1/2" (15-21 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91040		4	10,2 x 20,6 x 4	25 x 19 x 10	0,005	0,40	576	8 000625 910403

DOUBLE TAP CONNECTOR

91045





Tap connectors with double independent adjustment, for connecting two lines to a single water tap.
Screwed onto taps with 3/4" (20-27 mm) or 1/2" (15-21 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91045		8	7,9 x 24 x 5	28 x 25 x 13	0,009	0,95	576	8 000625 910458

3/4" (20-27 mm) MALE THREADED TWO-WAY ADAPTER

91589





Two-way adapter with double independent adjustment.
For taps with 3/4" (20-27 mm) thread; enables assembly of two electronic timers, pressure reducers, etc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91589		5	15,4 x 24 x 5,3	28 x 25 x 19	0,013	1,29	240	8 000625 915897

3/4" (20-27 mm) - 1/2" (15-21 mm) MULTI-THREAD TAP CONNECTOR

91002





To connect automatic Quick-Click tap fittings; female 3/4" (20-27 mm) thread and 1/2" (15-21 mm) adaptor.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91002		14	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,49	2016	8 000625 910021

3/4" (20-27 mm) AUTOMATIC ADAPTOR

91494





Used to connect the pressure reducer, 1/2" (13-16 mm) main hose adaptor, 1/4" (4-6 mm) threaded hose adaptor, and other accessories with 3/4" (20-27 mm) female thread to electronic timers.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
91494		10	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,39	1440

8 000625 914944

AUTOMATIC COUPLING

99009

91009





To connect 1/2" (13-16 mm) main tube to an outlet with automatic tap fitting.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
99009		25	3,5 x 7 x 3,5	10 x 39 x 13	0,005	0,86	3000
91009		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,55	1440

8 000625 990092

8 000625 910090

IN-LINE FILTER FOR 1/2" (13-16 mm) HOSE

91011





For water filtering in drip or microirrigation systems.
Installed in-line, directly on the 1/2" (13-16 mm) main hose.
Easy-to-clean mesh filter.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
91011		4	10,2 x 20,6 x 3,4	25 x 19 x 10	0,005	0,35	576

8 000625 910113

1/2" (13-16 mm) HOSE THREADED ADAPTOR

99013

91013





For direct connection of 1/2" (13-16 mm) tubes to taps with 3/4" (20-27 mm) or 1/2" (15-21 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
99013		25	3,5 x 5,5 x 3,5	10 x 39 x 13	0,005	0,74	3000
91013		14	7,9 x 15,7 x 4	25 x 19 x 10	0,005	0,55	2016

8 000625 990139

8 000625 910137

3/4" (20-27 mm) 1" (26-34 mm) THREADED COUPLING FOR 1/2" (13-16 mm) HOSE

99015

91015





To connect 1/2" (13-16 mm) main tube to an outlet with 3/4" (20-27 mm) or 1" (26-34 mm) female thread (e.g. solenoid valves).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
99015		25	4,2 x 5,75 x 4,2	10 x 39 x 13	0,005	0,75	3000
91015		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,42	1440

8 000625 990153

8 000625 910151

1/2" (15-21 mm) THREADED 3-WAY CONNECTOR

99017

91017





Used for connecting underground Colibrì micro-sprinklers in series (cod. 90210 - 90220 - 90230) with 1/2" (13-16 mm) main hose.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
99017		25	10 x 4,9 x 2,8	10 x 39 x 13	0,005	0,81	3000	8 000625 990177
91017		10	10 x 20,6 x 3,4	28 x 25 x 13	0,009	0,61	720	8 000625 910175

1/2" (15-21 mm) THREADED ELBOW

99019

91019





Used for end line connection of Colibrì underground micro-sprinklers (cod. 90210 - 90220 - 90230) with 1/2" (13-16 mm) main hose.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
99019		25	6,3 x 4,8 x 2,8	10 x 39 x 13	0,005	0,60	3000	8 000625 990191
91019		12	7,9 x 15,7 x 3,0	25 x 19 x 10	0,005	0,40	1728	8 000625 910199

1/2" (15-21 mm) THREAD ELBOW CONNECTOR

99021

91021





For elbow connection of Colibrì micro-sprinklers (cod. 90210 - 90220 - 90230) with 1/2" (13-16 mm) main hose.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
99021		25	6,55 x 5,65 x 6,55	10 x 39 x 13	0,005	1,05	3000	8 000625 990214
91021		6	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,37	864	8 000625 910212

1/2" (13-16 mm) COUPLING

99023

91023





Enables coupling of two 1/2" (13-16 mm) main tube sections.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
99023		25	3 x 8 x 3	10 x 39 x 13	0,005	0,66	3000	8 000625 990238
91023		12	7,9 x 15,7 x 3,0	25 x 19 x 10	0,005	0,45	1728	8 000625 910236

1/2" (13-16 mm) ELBOW COUPLING

99025

91025





Enables coupling of two 1/2" (13-16 mm) main tube sections.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
99025		25	6,45 x 6,45 x 2,8	10 x 39 x 13	0,005	0,70	3000	8 000625 990252
91025		12	7,9 x 15,7 x 3,0	25 x 19 x 10	0,005	0,47	1728	8 000625 910250

1/2" (13-16 mm) CONNECTOR WITH 4 1/4" (4-6 mm) OUTLETS

99027

91027





Useful for allowing up to four drippers inside pots or large flower containers.
Ideal for flower-beds or border micro irrigation systems, branching the lines from a single water tap.
Plugs supplied for closing any outlets not used.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
99027		25	2,8 x 10 x 2,8	10 x 39 x 13	0,005	0,80	3000	8 000625 990276
91027		4	10 x 20,6 x 3,4	25 x 19 x 10	0,005	0,27	576	8 000625 910274

1/2" (13-16 mm) TEE

99029

91029





Enables coupling of three 1/2" (13-16 mm) main tube sections.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
99029		25	10 x 6,5 x 2,8	10 x 39 x 13	0,005	0,94	3000	8 000625 990290
91029		10	10 x 20,6 x 3,5	28 x 25 x 13	0,009	0,65	720	8 000625 910298

SHUT-OFF VALVE

99033

91033





For water flow supply, shut-off and adjustment.
For installation between two 1/2" (13-16 mm) main tube sections.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
99033		25	10 x 4,6 x 2,8	10 x 39 x 13	0,005	0,92	3000	8 000625 990337
91033		10	10 x 20,6 x 3,3	28 x 25 x 13	0,009	0,64	720	8 000625 910335

END STOPPER

99035

91035





To shut off water flow at the end of 1/2" (13-16 mm) main tube.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
99035		25	2,8 x 4 x 2,8	10 x 39 x 13	0,005	0,46	3000	8 000625 990351
91035		12	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,36	1728	8 000625 910359

THREADED DRAINAGE VALVE

91037





Used for automatic drainage of the hose circuit.
Recommended for zones subject to cold winters.
With connector for 1/2" (13-16 mm) hose.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91037		5	10 x 20,6 x 4	25 x 19 x 10	0,005	0,34	720	8 000625 910373

RAINJET® CONNECTORS AND ACCESSORIES

Couplings, tap connectors, spikes and drainage valve. The RainJet accessories can be used to create any drip or micro-irrigation system stress-free, as well as helping you to make any changes to the system over time, should your needs or plants change.
All couplings and accessories are connected simply using pressure, with no need for any tool.
They are perfectly watertight. Using linear, elbow or tee connectors, you can create any layout you like. The RainJet accessories are ideal for creating any type of drip irrigation system, with a wide range of RainJet drippers to choose from. They can also be used to set an easy underground micro-irrigation circuit with Colibrì System. A must-have to meet the needs of a constantly evolving sector!

IN-LINE FILTER FOR 1/2" (13-16 mm) HOSE

91031





For water filtering in drip or micro irrigation systems.
Installed in-line, directly on the 1/2" (13-16 mm) main hose.
Easy-to-clean mesh filter.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91031		5	10 x 20,6 x 3,4	25 x 19 x 10	0,005	0,28	720	8 000625 910311



RAINJET BLOCK-SYSTEM

With the innovative Block-System compression connectors installation could not be any easier.



RAINJET CONNECTORS AND ACCESSORIES

RainJet couplings and accessories are connected easily using pressure, with no need for any tools, and they are watertight.

1/2" (13-16 mm) HOSE THREADED ADAPTOR

91347





For direct connection of 1/2" (13-16 mm) tubes to taps with 3/4" (20-27 mm) or 1/2" (15-21 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91347		10	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,37	1440	8 000625 913473

1/2" (13-16 mm) - 1/4" (4-6 mm) HOSE THREADED ADAPTOR

91345





For direct connection of 1/2" (13-16 mm) and 1/4" (4-6 mm) tubes to taps with 3/4" (20-27 mm) or 1/2" (15-21 mm) thread.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91345		10	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,37	1440	8 000625 913459

3/4" (20-27 mm) 1" (26-34 mm) THREADED COUPLING FOR 1/2" (13-16 mm) HOSE

91066





To connect 1/2" (13-16 mm) main tube to an outlet with 3/4" (20-27 mm) or 1" (26-34 mm) female thread (e.g. solenoid valves).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91066		10	7,9 x 15,7 x 4,2	25 x 19 x 10	0,005	0,36	1440	8 000625 910663

1/2" (15 - 21 mm) THREADED 3-WAY CONNECTOR

91072





Used for connecting underground Colibrì micro-sprinklers in series (cod. 90210 - 90220 - 90230) with 1/2" (13-16 mm) main hose.
Blister of 2 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91072		10	7,9 x 15,7 x 3,7	25 x 19 x 10	0,005	0,38	1440	8 000625 910724

1/2" (15-21 mm) THREADED ELBOW

91082





Used for end line connection of Colibrì underground micro-sprinklers (cod. 90210 - 90220 - 90230) with 1/2" (13-16 mm) to main hose.
Blister of 2 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91082		10	7,9 x 15,7 x 2,8	25 x 19 x 10	0,005	0,32	1440	8 000625 910823

NEW FOR 2024

QUICK-CLICK CONNECTOR FOR 1/2"(13-16 mm) HOSE

91070





Connector for joining two hoses in series: one for drip irrigation 1/2" (13-16 mm) and one hose with a Quick-Click automatic coupling on the end.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91070		15	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,40	2160	8 000625 910700

1/2" (13-16 mm) COUPLING

99076

91076







Enables coupling of two 1/2" (13-16 mm) main tube sections.
Blister of 4 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99076		6 x 20	15 x 15 x 3	10 x 39 x 13	0,005	0,81	720	8 000625 990764
91076		15	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,53	2160	8 000625 910762

1/2" (13-16 mm) ELBOW COUPLING

99081

91081







Enables coupling of two 1/2" (13-16 mm) main tube sections.
Blister of 2 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99081		6 x 20	15 x 15 x 3	10 x 39 x 13	0,005	0,78	720	8 000625 990818
91081		15	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,36	2160	8 000625 910816

1/2" (13-16 mm) - 1/4" (4-6 mm) 2 - WAY COUPLING

91073





Used to branch off 1/4" (4-6 mm) feeding tube sections from 1/2" (13-16 mm) main tube.
Blister of 2 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91073		10	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,30	1440	8 000625 910731

1/2" (13-16 mm) TEE

99071

91071







Enables coupling of three 1/2" (13-16 mm) main tube sections.
Blister of 2 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99071		4 x 20	14 x 22 x 3	10 x 39 x 13	0,005	0,80	480	8 000625 990719
91071		15	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,48	2160	8 000625 910717

1/2" (13-16 mm) END STOPPER

91086





To shut off water flow at the end of 1/2" (13-16 mm) main tube.
Blister of 4 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
91086		15	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,44	2160	8 000625 910861

1/2" (13-16 mm) SHUT-OFF VALVE

91280





For water flow supply, shut-off and adjustment.
For installation between two 1/2" (13-16 mm) main tube sections.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
91280		10	7,9 x 15,7 x 4	25 x 19 x 10	0,005	0,32	1440

8 000625 912803

TUBE CLAMP

91096





For use when pressure in the 1/2" (13-16 mm) main tube exceeds 1,5 bar.
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
91096		10	7,9 x 15,7 x 2,8	25 x 19 x 10	0,005	0,39	1440

8 000625 910960

1/2" (13-16 mm) SUPPORT STAKE

99090

91090







Enables secure ground fixture of the 1/2" (13-16 mm) main tube.
Blister of 8 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
99090		4 x 20	13 x 22 x 7	20 x 39 x 13	0,010	1,40	288
91090		10	15,4 x 24 x 3	28 x 25 x 19	0,013	1,72	480

8 000625 990900

8 000625 910908

THREADED DRAINAGE VALVE

90920





Used for automatic drainage of the hose circuit.
Recommended for zones subject to cold winters.
With connector for 1/2" (13-16 mm) hose.
Blister of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90920		4	7,9 x 15,7 x 3,5	12 x 19 x 10	0,002	0,16	1152

8 000625 909209

WALL HOSE CLAMPS

91097





Allows the 1/2" (13-16 mm) main hose to be firmly attached to a vertical surface (e.g. a wall).
Blister pack of 5 pcs with screws and plugs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
91097		10	7,9 x 15,7 x 3,7	25 x 19 x 10	0,005	0,70	1440

8 000625 910977

1/4" 2-WAY COUPLING

99155

91155





Used to branch off 1/4" (4-6 mm) feeding tube sections from 1/2" (13-16 mm) main tube or to join two feeding tube sections. Easy grip and watertight seal, guaranteeing no leakage.
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
99155		20 x 20	7,5 x 13 x 10	10 x 39 x 13	0,010	0,75	2400	8 000625 991556
91155		13	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,39	1872	8 000625 911554

1/4" ELBOW

91143





For connecting two pieces of 1/4" (4-6 mm) feeding hose at right angle.
Easy grip and watertight seal, guaranteeing no leakage.
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91143		13	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,40	1872	8 000625 911431

1/4" 3-WAY COUPLING

91141





Enables coupling of three 1/4" (4-6 mm) feeding tube sections.
Easy grip and watertight seal, guaranteeing no leakage.
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91141		13	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,42	1872	8 000625 911417

1/4" 4-WAY COUPLING

91145





Enables coupling of four 1/4" (4-6 mm) feeding tube sections.
Easy grip and watertight seal, guaranteeing no leakage.
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91145		13	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,39	1872	8 000625 911455

HOLE PLUGS

91170





For sealing holes on 1/2" (13-16 mm) main tube or ends of 1/4" (4-6 mm) feeding tube.
Easy grip and watertight seal, guaranteeing no leakage.
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91170		13	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,40	1872	8 000625 911707

1/4" SHUT-OFF VALVE

91270





For 1/4" (4-6 mm) feeding tube.
Enables water flow adjustment and shut-off.
Blister of 5 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
91270		10	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,35	1440

8 000625 912704

HOLE PUNCHER/SPANNER

91185





Used to punch holes in 1/2" (13-16 mm) main tube.
Also enables tightening and adjustment of micro-sprinklers.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
91185		10	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,26	1440

8 000625 911851

1/4" SUPPORT STAKE

99190

91190







Ideal to secure ground fixture of the 1/4" (4-6 mm) feeding tube or installation in plant pots.
Blister of 15 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
99190		10 x 40	14 x 19 x 3	20 x 39 x 13	0,010	2,61	720
91190		10	15,4 x 24 x 2,5	28 x 25 x 19	0,013	1,45	480

8 000625 991907

8 000625 911905





RAINJET® DRIPPERS

Claber drippers accurately distribute the ideal amount of water, always ensuring the best wellbeing of your plants.
Drippers, shrubblers and micro-mist sprayers let you create an efficient, completely autonomous irrigation line on any terrace, balcony, flowerbed or vegetable patch, distributing the quantity calibrated for each plant around its roots.
The wide range of Claber drippers comes with accessories and ready-to-use kits, to meet any irrigation need, without wasting a single drop of water. Smart irrigation that respects the environment, by Claber.

END-OF-LINE DRIPPER

Complete and precise



ADJUSTABLE FLOW RATE
AND PERFECTLY WATERTIGHT







CALIBRATED WATERING
WITH NO WASTE

0-6 L/H END-OF-LINE DRIPPER

99209

91209

91211

91213





End-of-line dripper for localized watering.
Adjustable from 0 to 6 litres for calibrated irrigation, to plants' different needs and soil type.
Direct connection to the end of the feeding tube, with easy coupling and watertight seal.
Readily inspectable for easy cleaning.
Blister pack:
91209 – 10 pcs
91211 – 20 pcs
91213 – 40 pcs

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
99209		6 x 50	15 x 30 x 3	20 x 39 x 13	0,010	1,90	432	8 000625 992096
91209		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,74	1440	8 000625 912094
91211		10	10 x 20,6 x 4	28 x 25 x 13	0,009	1,44	720	8 000625 912117
91213		8	15,4 x 24 x 3,5	28 x 25 x 19	0,013	2,25	384	8 000625 912131

0-6 L/H IN-LINE DRIPPER

99217

91217





In-line dripper for localized watering. Adjustable from 0 to 6 litres for calibrated irrigation, to plants' different needs and soil type.
Direct connection between two ends of the feeding tube, with easy coupling and watertight seal. Readily inspectable for easy cleaning.
Blister pack containing: 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
99217		6 x 50	14 x 18 x 5	20 x 39 x13	0,010	2,14	432	8 000625 992171
91217		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,80	1440	8 000625 912179

0-10 L/H PLUS END-OF-LINE DRIPPER

91214





End-of-line dripper for localized watering.
0-10 l/h adjustable flow rate, from fully closed to fully open.
Accurate and calibrated flow control.
Direct connection to the end of the feeding tube, with easy coupling and watertight seal.
Readily inspectable for easy cleaning.
Blister pack containing: 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91214		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,92	1440	8 000625 912148

0-10 L/H PLUS IN-LINE DRIPPER

91218





In-line dripper for localized watering. 0-10 l/h adjustable flow rate, from fully closed to fully open. Accurate and calibrated flow control without twisting the tube.
Direct connection between two ends of the feeding tube, with easy coupling and watertight seal. Readily inspectable for easy cleaning. Blister pack containing: 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91218		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,94	1440	8 000625 912186

THE RELEASE OF WATER IS ACCURATE AND STEADY IN EVERY SITUATION







SELF-REGULATING DRIPPER

99222

91222







Constant 4 l/h flow rate at start and end of line.
For direct installation into the 1/2" (13-16 mm) main tube or into the 1/4" (4-6 mm) feeding tube.
Easily disassembled for cleaning.
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99222		10 x 50	14 x 17 x 4	20 x 39 x 13	0,010	2,80	720	8 000625 992225
91222		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,69	1440	8 000625 912223

0-40 L/H ADJUSTABLE DRIPPER

99225

91225







For direct installation into the 1/2" (13-16 mm) main tube or into the 1/4" (4-6 mm) feeding tube.
Flow rate adjustable from 0 to 40 litres per hour.
Easily disassembled for cleaning.
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99225		10 x 50	14 x 22 x 6,5	20 x 39 x 13	0,010	2,55	720	8 000625 992256
91225		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,66	1440	8 000625 912254

ADJUSTABLE SHRUBBLER

99232

91232







0-40 l/h adjustable flow, from fully closed to fully open.
Watering over an area of 360°.
Direct connection into the 1/4" (4-6 mm) feeding tube or into the 1/2" (13-16 mm) main tube.
Readily inspectable for easy cleaning.
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
99232		10 x 50	14 x 22 x 3	20 x 39 x 13	0,010	2,65	720	8 000625 992324
91232		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,71	1440	8 000625 912322

0-40 L/H ADJUSTABLE DRIPPER

91227





Adjustable dripper on spike.
For direct installation into the 1/4" (4-6 mm) feeding tube.
Ensures precise and localised irrigation at plant base.
Flow rate adjustable from 0 to 40 litres per hour.
Easily disassembled for cleaning.
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91227		6	15,4 x 24 x 2,5	20 x 39 x 10	0,007	0,98	576	8 000625 912278

0-40 L/H ADJUSTABLE SHRUBBLER

99228

91228





Adjustable shrubbler on spike.
Flow rate is adjustable from 0 to 40 litres per hour.
Ensures precise and localised irrigation at plant base.
Flow rate is adjustable according to various plant requirements.
For direct installation into the 1/4" (4 - 6 mm) feeding tube.
Easily disassembled for cleaning.
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
99228		6 x 25	13 x 23 x 5	20 x 39 x 13	0,010	1,97	432	8 000625 992287
91228		6	15,4 x 24 x 2,5	20 x 39 x 10	0,007	1,02	576	8 000625 912285

360° MICRO-MIST SPRAYER ON SPIKE

91229





Micro-mist sprayer on spike.
Ensures a soft and even irrigation over an area of 360°.
Connected to the end of a 1/4" (4-6 mm) feeding tube.
Easily anchored to the soil.
Readily inspectable for easy cleaning.
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91229		6	15,4 x 24 x 2,5	20 x 39 x 10	0,007	1,02	576	8 000625 912292

SELF-REGULATING DRIPPER ON SPIKE

91223





Self-regulating dripper on spike.
Constant 4 l/h flow rate at start and end of line.
Ensures precise and localised irrigation at plant base.
Connected to the end of the 1/4" (4-6 mm) feeding tube.
Easily disassembled for cleaning.
Rinse head under running water to clean.
Blister of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
91223		6	15,4 x 24 x 2,5	20 x 39 x 10	0,007	0,98	576	8 000625 912230

RAINJET® KIT

RainJet kits include everything you need to set up a drip-irrigation system for your terrace or vegetable patch by yourself: main and feeding hoses, drippers, couplings and – for the timer kits – a battery-powered water timer. RainJet kits can be used to water between 20 and 60 plants, depending on the chosen solution, and they can be extended at any time with additional RainJet components.
A highly practical solution that guarantees well-balanced irrigation!










ORTO DRIP KIT

90767



This ready-to-use kit is the best solution for watering vegetable gardens, adjusting the flow and adapting it to the different plants needs.
This kit contains all the components for setting up 6 irrigation zones and watering up to 60 plants, with adjustable drippers (40 end-of-line and 20 shrubblers) and 25 m of main hose.

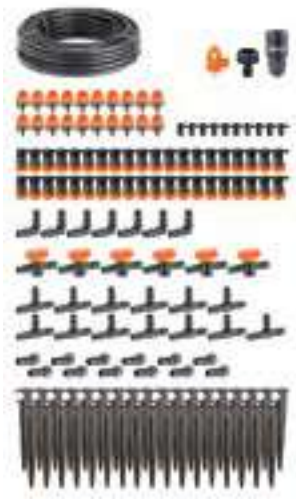

CONTAINS

90365	Main tube 25 m	x 1	**91086**	1/2" End stopper	x 12
8627	3/4" Threaded tap connector	x 1	**91090**	1/2" Support stake	x 35
91009	Automatic coupling	x 1	**91185**	Hole puncher/spanner	x 1
91280	1/2" Shut-off valve	x 6	**91170**	Hole plugs	x 10
91081	1/2" Elbow coupling	x 7	**91214**	0-10 L/h plus end-of-line dripper	x 40
91071	1/2" Tee	x 11	**91232**	Adjustable shrubbler	x 20

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90767		1	40 x 40 x 12	40 x 40 x 12	0,019	3,50	54	8 000625 907670

DRIP STARTER KIT

90764



Fully equipped for a 20-pot system, with adjustable drippers to adapt the water flow to each plant. Includes pressure reducer.
Can be extended with other components from the RainJet range.



CONTAINS

90370	Feeding tube 20 m	x 1	**91217**	0-6 l/h in-line dripper	x 20
91040	Pressure reducer	x 1	**91270**	1/4" shut-off valve	x 3
91141	1/4" tee	x 5	**91345**	1/2" - 1/4" hose threaded adaptor	x 1
91170	Hole plugs	x 10	**91494**	3/4" automatic adaptor	x 1
91190	1/4" support stake	x 20			

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90764		4	30 x 30,5 x 4,4	39 x 39 x 19	0,029	3,50	96

8 000625 907649

DRIP KIT PLUS 25 POTS

90759



Ready-to-use kit for optimum watering of plants on the terrace or in flowerbeds, adjusting the flow and adapting it to what the different plants need.
Contains all the connections to make a drip irrigation system to water up to 25 plants with adjustable in-line Plus drippers and 25 m of feeding hose.



CONTAINS

345073	Feeding tube 25 m	x 1	**91218**	0-10 l/h in-line dripper	x 25
91040	Pressure reducer	x 1	**91270**	1/4" shut-off valve	x 3
91141	1/4" tee	x 5	**91345**	1/2" - 1/4" hose threaded adaptor	x 1
91170	Hole plugs	x 10	**91494**	3/4" automatic adaptor	x 1
91190	1/4" support stake	x 25			

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90759		1	29,5 x 30,5 x 7,5	29,5 x 30,5 x 7,5	0,007	1,00	96

8 000625 907595

TIMER KIT 20 LOGICA

90766



Fully equipped for a 20-pot system, with adjustable drippers to adapt the water flow to each plant. Includes pressure reducer and Aquauno Logica tap timer, to automatically start watering at the best time of the day. Just turn the knob to select one of the 15 preset programmes.
Can be extended with other components from the RainJet range.



CONTAINS

8422	Aquauno Logica	x 1	**91190**	1/4" support stake	x 20
90370	Feeding tube 20 m	x 1	**91217**	0-6 l/h in-line dripper	x 20
91040	Pressure reducer	x 1	**91270**	1/4" shut-off valve	x 3
91141	1/4" tee	x 5	**91345**	1/2" - 1/4" hose threaded adaptor	x 1
91170	Hole plugs	x 10	**91494**	3/4" automatic adaptor	x 1

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90766		1	29,5 x 30,5 x 7,5	29,5 x 30,5 x 7,5	0,007	1,24	96

8 000625 907663

TIMER KIT 20 PRATICO

90763





Fully equipped for a 20-pot system, with adjustable drippers to adapt the flow of water to each plant. Includes pressure reducer and Aquauno Pratico tap timer to set automatic watering with daily frequency and maximum watering run time of 60 minutes.
Can be extended with other components from the RainJet range.

CONTAINS

8425	Aquauno Pratico	x 1	**91190**	1/4" support stake	x 20
90370	1/4" feeding tube 20 m	x 1	**91217**	0-6 l/h in-line dripper	x 20
91040	Pressure reducer	x 1	**91270**	1/4" shut-off valve	x 3
91141	1/4" tee	x 5	**91345**	1/2" - 1/4" hose threaded adaptor	x 1
91170	Hole plugs	x 10	**91494**	3/4" automatic adaptor	x 1

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90763		1	29,5 x 30,5 x 7,5	29,5 x 30,5 x 7,5	0,007	1,23	96

8 000625 907632

TERRAZZO DRIP KIT

90772





Ready-to-use kit to water plants on terraces or flower beds, adjusting the flow according to the different requirements.
This kit contains all the components for setting up an irrigation system to water up to 50 plants, with adjustable drippers (30 in-line and 20 end-of-line), 25 m of main tube and 25 m of feeding tube.

CONTAINS

90365	Main tube 25 m	x 1	**91073**	1/2" - 1/4" 2 - way coupling	x 15
345073	1/4" feeding tube 25 m	x 1	**91086**	1/2" end stopper	x 1
91002	Multi-thread tap connector	x 1	**91090**	1/4" support stake	x 50
91009	Automatic coupling	x 1	**91218**	0-10 l/h plus in-line dripper	x 30
91280	1/2" shut-off valve	x 1	**91214**	0-10 l/h plus end-of-line dripper	x 20
91081	1/2" elbow coupling	x 5			

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90772		1	40 x 40 x 12	40 x 40 x 12	0,019	3,43	54

8 000625 907724









RAINJET® MICRO-SPRINKLERS

Claber micro-irrigation is inspired by soft spring rains: tiny droplets, precisely distributed, fall gently onto leaves, crops and flowers, even the most delicate ones, always delivering the optimum amount of water and preventing any waste.
The micro-sprinklers are easy to install straight onto feeding hoses and main hoses, or onto suitable rods to raise them to the right height. RainJet micro-sprinklers, a gentle caress of water for healthier, more beautiful plants.







180° MICRO-SPRINKLER

Fine rain effect

ECO-COMPATIBLE MATERIALS
MADE TO LAST

CALIBRATED WATERING
WITH NO WASTE

360° MICRO-SPRINKLER

91256





Suitable for watering circular areas.
For installation into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube, or on fitted rigid risers for overhead installation.
Blister of 10 pcs.
Irrigated area max. 16 m².

Bar	0,5	1,0	1,5	2,0	2,5
l/h	22,0	34,0	46,0	52,0	72,0
Øm	3,0	3,5	4,5	4,0	4,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
91256		10	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,38	1440

8 000625 912568

180° MICRO-SPRINKLER

91255





Suitable for watering semi-circular areas.
For installation into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube, or on fitted rigid risers for overhead installation.
Blister of 10 pcs.
Irrigated area max. 10 m².

Bar	0,5	1,0	1,5	2,0	2,5
l/h	17,0	33,0	45,0	59,0	61,0
r(m)	1,2	2,0	2,2	2,2	2,5

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
91255		10	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,38	1440

8 000625 912551

90° MICRO-SPRINKLER

91254





Suitable for watering right-angled corners.
For installation into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube, or on fitted rigid risers for overhead installation.
Blister of 10 pcs.
Irrigated area max. 8 m².

Bar	0,5	1,0	1,5	2,0	2,5
l/h	17,0	33,0	45,0	59,0	61,0
r(m)	1,5	2,2	2,7	3,0	3,2

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
91254		10	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,38	1440

8 000625 912544

MICRO-SPRINKLER STRIP

91257





Used for watering rectangular strips.
Used either into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube or on fitted rigid risers for overhead installation.
Blister of 10 pcs.
Irrigated area max. 6,8 m².

Bar	0,5	1,0	1,5	2,0	2,5
l/h	17,0	33,0	45,0	58,0	61,0
r(m)	3,2	5,5	7,2	8,5	9,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
91257		10	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,38	1440

8 000625 912575

360° MICRO-MIST SPRAYER

91258





For light mist sprinkling.
Used either into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube or on fitted rigid risers for overhead installation.
Blister of 10 pcs.
Irrigated area max. 3 m².

Bar	0,5	1,0	1,5	2,0	2,5
l/h	13,0	19,0	23,0	26,0	29,0
Øm	1,0	1,6	1,8	2,0	2,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
91258		10	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,38	1440

8 000625 912582

360° ADJUSTABLE MICRO-SPRINKLER

91249





Suitable for watering circular areas. Used either directly into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube or on fitted rigid risers for overhead installation. Equipped with adjustment and shut-off valve.
Blister of 5 pcs. Irrigated area max. 16 m².

Bar	0,5	1,0	1,5	2,0	2,5
l/h	22,0	34,0	46,0	52,0	72,0
Øm	3,0	3,5	4,5	4,0	4,0

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
91249		10	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,42	1440

8 000625 912490

180° ADJUSTABLE MICRO-SPRINKLER

91248





Suitable for watering semi-circular areas. Used either into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube or on fitted rigid risers for overhead installation.
Equipped with adjustment and shut-off valve.
Blister of 5 pcs. Irrigated area max. 10 m².

Bar	0,5	1,0	1,5	2,0	2,5
l/h	17,0	33,0	45,0	59,0	61,0
r(m)	1,2	2,0	2,2	2,2	2,5

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
91248		10	7,9 x 15,7 x 3,5	25 x 19 x 10	0,005	0,41	1440

8 000625 912483

360° ADJUSTABLE MICRO-SPRINKLER

91250





Suitable for watering circular areas. For installation into the 1/2" (13-16 mm) main tube, the 1/4" (4-6 mm) feeding tube or on fitted rigid risers for overhead installation.
Equipped with flow adjustment and shut-off valve.
Blister of 5 pcs. Irrigated area max. 57 m².

Bar	0,5	1,0	1,5	2,0	2,5
l/h	48,8	90,0	120,0	142,0	165
Øm	3,0	5,0	6,5	7,5	8,5

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
91250		10	7,9 x 15,7 x 4,5	25 x 19 x 10	0,005	0,48	1440

8 000625 912506

MICRO-SPRINKLER SUPPORT STAKE

91265





Used for overhead installation of micro sprinklers according to various plant heights.
Adjustable height: 30 - 50 cm.
Header bag of 2 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
91265		8	8 x 33 x 1,5	20 x 39 x 10	0,007	0,66	768

8 000625 912650

FITTED RIGID RISERS

91260



Allows to rise the micro-sprinklers and micro-sprayers at 30 cm.
Screwed directly into the 1/2" (13-16 mm) main tube.
Header bag of 10 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
91260		10	8 x 33 x 1	20 x 39 x 10	0,007	0,99	960

8 000625 912605

AQUA-MAGIC® SYSTEM

Plants and flowers enthusiasts do not always have a tap available to water their pots on their terrace or balcony.
Claber has the answer to this frequent problem: Aqua-Magic System. This ready-to-use kit allows you to set up a drip irrigation system without needing to connect to the power or water mains. Everything you need comes in the kit: a special timer with a built-in pump and a photovoltaic panel, drippers and all the accessories for watering up to 20 pots.
Aqua-Magic System can be used together with any standard water recipient or with the Aqua-Magic Tank, a special foldable tank that can hold up to 80 litres of water. It is easy to transport and assemble and takes up minimum space.

AQUA-MAGIC® SYSTEM

The magic of water with no taps
and no electrical power sockets.



PLENTY OF CAREFREE DAYS!
USE WITH AQUA-MAGIC TANK
OR ANY STANDARD WATER RECIPIENT



IDEAL FOR HANGING VEGETABLE
GARDENS AND FLOWERING PLANTS,
EVEN ON DIFFERENT LEVELS



POWERED BY SUNLIGHT THANKS TO
THE PHOTOVOLTAIC PANEL
THAT RECHARGES THE BATTERIES

WEBSITE

QUICK AND EASY TO PROGRAMME
WITH TWO CONVENIENT DIALS

AQUA-MAGIC SYSTEM

8063







Independent ready-to-use drip kit. It includes timer, photovoltaic panel and built-in pump to draw water from a tank, filter and deliver it to 20 drippers.
Inspectable filter for easy cleaning.
The photovoltaic panel absorbs the light energy and turns it into electrical energy which is accumulated in 2 rechargeable AA 1.2V NiMH 1800mAh batteries (not included).
A specific led reports the battery level. 54 possible irrigation solutions, which can be set with just 2 rotating knobs: one with the frequencies (between 1 and 7 days), the other with the amount of water that you wish to deliver with each dripper (between 40ml and 200ml).
Optional manual irrigation: 100ml per dripper (the programme remains stored).
It can be used with any tank.
The kit contains:
- 1 solar timer-pump
- 1 anti-siphon flow blocking valve at the end of irrigation
- 1/4" suction filter
- 1 bracket with screws and plugs for wall-mounting
- 20 self-regulating drippers
- 20m of 1/4" (4-6 mm) feeding tube
- 20 1/4" support stakes
- 5 1/4" 3-way couplings
- 6 hole plugs

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8063		1	29,5 x 30,5 x 7,5	29,5 x 30,5 x 7,5	0,007	1,26	108	8 000625 080632

AQUA-MAGIC TANK

8061





Folding tank with a capacity of 80 litres for Aqua-Magic System (code 8063).
Easy assembly with polypropylene sleeves.
Sturdy and stable thanks to the easy-to-assemble aluminium frame with special anti-scratch covering. Equipped with a special coupling bar to position Aqua-Magic System.
Dimensions when open: 40 x 40 x 85 cm.
At the end of the season, it can be tidely stored, taking up minimum space.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8061		1	47 x 13 x 56	47 x 56 x 13	0,034	3,15	28	8 000625 080618

SPARE DRIPPERS

8064





Spare in-line Aqua-Magic drippers for localised irrigation.
Pack of 5 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8064		10	8 x 10 x 2,5	13 x 19 x 10	0,002	0,32	2880	8 000625 080649

10 m HOSE 1/4" (4-6 mm)

8068





10 m coil of spare feeding tube, 1/4" (4-6 mm) diameter.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8068		4	20 x 4 x 20	23,7 x 17,5 x 16,5	0,007	0,95	504	8 000625 080687

INDOOR PLANTS

House plants make our homes more beautiful but they need the right care: moderate watering that's steady, with no long breaks, and without over-watering.
Claber has designed a range of solutions for house plants, that suit all situations.
Systems that don't need to be connected to a tap and that water plants every day with the right amount of water, guaranteeing up to 28 days of complete autonomy: with Claber it's easy to surround yourself with green delights, even at home.



IDRIS® SPIKE

Individual pot watering that's autonomous and perfectly calibrated

AQUALUX® SYSTEM

The best system for watering up to 20 pots daily without a tap

OASIS® EVOLUTION

The definitive watering solution for when you're out or on holiday

IDRIS® SPIKE

Idris Spike is the exclusive sprinkler designed to water pot plants steadily and with the right amount of water.
It's the ideal solution for when you are away from home for a long period, but it is also useful when you are at home.
It guarantees your plants' well-being, without you needing to water them by hand.
You can use any normal plastic bottle with Idris Spike and you do not need to connect it to the power mains.
It guarantees up to 20 days of autonomous watering.
Made from a tough plastic material that is resistant to knocks and limescale, complete with drippers with different flow rates, and designed to be ultra-sturdy, Idris Spike is ideal for all plants: at home, on the balcony and in the office.






IDRIS SPIKE

8052





Automatic dripper for pot plants.
New conical connector suitable for standard plastic bottles up to 2 litres.
Supplied complete with 2 nozzles, rated 10 and 15 cl.
The spike is anchored into the soil, near the plant roots.
Inspectable and washable under running water.

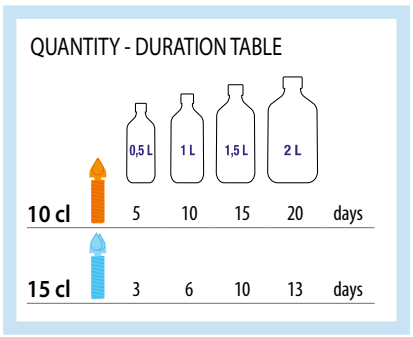

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8052		12	16 x 30 x 4	25 x 59 x 19	0,028	1,60	288	8 000625 080526



OASIS® EVOLUTION

Even more versatile and high-performing, unbeatably practical and reliable: Oasis Evolution is the new version of the Oasis water distributor.
With no need of a tap or an electrical power supply, Oasis Evolution enables you towater up to 20 pots for several days. All you have to do is set up a simple drip-irrigation line using the drippers and accessories provided.
There is a handy dial for viewing and selecting 1 of the 4 different watering programmes displayed on the backlit screen. Delayed starts are also possible.
Perfect for watering house plants when you go on holiday.



OASIS EVOLUTION

8054





Fully independent water-distributor, ready to use in few minutes and extremely compact.
No need of connections to a tap or power mains. Oasis Evolution contains 25 litres of water and provides waste-free drip irrigation for up to 20 pots running on a daily cycle.
Four different programmes (7, 14, 21, 28 days of autonomy), selected with a simple dial.
Start button to start the programme immediately or with a delay of up to 23 hours.
The backlit LCD display shows the selected programme, duration of the irrigation cycle in progress, any programmed delay, and the time remaining until the next irrigation cycle.
Compact, elegant design that overlooks no detail.
Operated by 2 x AA 1.5 V batteries (not included).
Supplied with 10 metres of PVC feeding hose, 20 drippers and 20 hose stakes.

PROGRAMME TABLE

PROGRAMME	ml PER DRIPPER
7 days	145 ml
14 days	70 ml
21 days	45 ml
28 days	35 ml



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8054		1	36,5 x 32 x 36	37 x 37 x 34	0,047	3,50	18	8 000625 080540

SPARE DRIPPERS

8059





Spare in-line Oasis Evolution drippers for localised irrigation.
Pack of 5 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8059		10	8 x 10 x 2,5	13 x 19 x 10	0,002	0,27	2880	8 000625 080595

AQUALUX® SYSTEM

Aqualux System is the new versatile system by Claber, for watering potted plants every day without the need of a connection to a tap.
Aqualux can be assembled in just a few minutes and guarantees up to 4 weeks of autonomy, thanks to its large 30-litre tank.
The integrated electric pump operates an irrigation system with fixed-flow drippers, which can water up to 20 pots.
There are 4 different programmes to choose from with a practical dial, the option to delay the start and a backlit display that makes programming simple and accurate.
The power supply system is innovative, with a USB adapter to connect to the mains, or 2 x AA rechargeable batteries that guarantee operation for the full duration of the programme, even when there is no electrical power supply.
A versatile, reliable and easy-to-use solution to create a true drip irrigation system.



WEBSITE

AQUALUX® SYSTEM

8062







Water distributor with integrated timer and pump to create a drip irrigation system for up to 20 pots. Suitable for house plants as well as for shertered terraces and balconies.
The system can be powered electrically by a USB adaptor (included), or 2 rechargeable AA 1.2V NiMH batteries, min. 2400 mAh (not supplied).
Foldable water tank in thick PVC, 30-litre capacity.
Handy opening at the top for filling. No tools required to assemble the upright supports.
Four different programmes (7, 14, 21, 28 days of autonomy), selected with a simple dial.
Start button to start the programme immediately or with a delay of up to 23 hours.
The backlit LCD display shows the selected programme, the duration of the watering cycle in progress, any programmed delay and the time remaining until the next irrigation cycle.
Contains:
- 20 metres of PVC feeding hose
- 20 drippers
- 20 hose stakes
- 5 tees
- 6 end-of-line plugs.

PROGRAMME TABLE

PROGRAMME	ml PER DRIPPER
7 days	200 ml
14 days	100 ml
21 days	65 ml
28 days	50 ml

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8062		1	40 x 40 x 20	40 x 40 x 20	0,032	3,60	24

8 000625 080625

					
CODE	**8052**	**90764**	**90759**	**90763**	**90766**
DESCRIPTION	Idris Spike	Kit Drip 20 pots	Kit Drip Plus 25 pots	Timer Kit 20 Pratico	Timer Kit 20 Logica
Contents	 1 MAX	 20 MAX	 25 MAX	 20 MAX	 20 MAX
Water supply	 0,5 - 2 l				
Ideal for	Indoor plants	Outdoor pot plants	Outdoor pot plants	Outdoor pot plants	Outdoor pot plants
Extendable	no	yes	no	yes	yes
Electric power supply	-	-	-	1 x 9V ALKALINE	1 x 9V ALKALINE
Timer included	-	no	no	yes, Aquauno Pratico (8425)	yes, Aquauno Logica (8422)
LCD screen	-	-	-	no	no
Method of programming	-	-	-	buttons	rotary knob
Days of autonomy	max 20 (with 2 l bottle)	-	-	-	-
Watering frequency	1 per day	as you wish, depending on the timer used	as you wish, depending on the timer used	1 per day	from 2 per day to 1 per week
Delayed start	no	possible, depending on the timer used	possible, depending on the timer used	no	no
Drippers provided					
Type of dripper	interchangeable, with fixed flow rate	adjustable 0-6 l/hr	adjustable 0-10 l/hr	adjustable 0-6 l/hr	adjustable 0-6 l/hr
Hose supplied					

				
90767	**90772**	**8063**	**8054**	**8062**
Orto drip kit	Terrazzo drip kit	Aqua-Magic System	Oasis Evolution	Aqualux System
 60 MAX	 50 MAX	 20 MAX	 20 MAX	 20 MAX
			25 l 	30 l 
Vegetable patches	Outdoor pot plants	Outdoor pot plants	Indoor plants	Indoor and outdoor plants
no	no	no	no	no
-	-	photovoltaic panel and **2 x** HR6/AA 1,2 V NiMH ALKALINE min. 1800 mAh batteries	**2 x** AA 1,5 V ALKALINE	power supply unit with USB socket or **2 x** HR6/AA 1,2 V NiMH ALKALINE min. 2400 mAh batteries
no	no	yes	yes	yes
-	-	no	yes	yes
-	-	2 rotary knobs	rotary knob	rotary knob
-	-	variable, depending on tank used	max 28	max 28
as you wish, depending on the timer used	as you wish, depending on the timer used	from 1 per day to 1 per week	1 per day	1 per day
possible, depending on the timer used	possible, depending on the timer used	yes, by setting the watering frequency every day +6 hours	yes, up to 23 hours	yes, up to 23 hours
				
adjustable 0-10 l/hr (91214) and 0-40 l/hr (91232)	adjustable 0-10 l/hr	with fixed flow rate	with fixed flow rate	with fixed flow rate
				

UNDERGROUND IRRIGATION

AT THE CUTTING EDGE

Claber research efforts and experience bring all of the benefits of professional underground irrigation into the domestic realm.

With a wide range of products and solutions, you can create a highly efficient made-to-measure system with minimal effort.

Pop-up sprinklers designed for spaces of all sizes, accessories for setting up any type of installation, and practical and versatile programming from anywhere, even where there is no mains electricity.

With Claber it is now even easier to save water, add value to your home and create a thriving garden.



Keep your garden green even during the scorching summer months.

Choose a high-performing automated solution.



MASTERFUL IRRIGATION, AVAILABLE TO ALL

Pop-up sprinklers bring professional quality and performance to any garden.
This wide range of sprinklers with an easy-to-adjust jet allow you to water just where is needed, for a perfectly kept garden with no wasted water.



SMART INNOVATION

More tech, more flexibility, less hassle.
The innovative timers and control units by Claber allow you to manage any garden installation, from the smallest to the largest.



A TECHNOLOGICAL HUB IN YOUR GARDEN

A rich technology hub to help you manage small and large gardens alike, Hydro-4 holds a timer and 4 solenoid valves in a small valve box, serving up to four independent irrigation lines.





THE FRONTIER OF INNOVATION

Claber has made underground irrigation simple. Hi-tech, efficient products designed even for inexperienced hands mean no one has to miss out on the outstanding performance of an automated system. And your garden will always be a beautiful green oasis.

COLIBRÌ® SYSTEM

With the Colibrì System, Claber brings all of the advantages of underground irrigation into small green spaces too! It is easy to use, saves on water, keeps your lawn and plants looking good and healthy, and makes the most of your garden. Colibrì is easy to install, with no need to dig large holes or connect up to the power mains.
All you need is one of Claber's battery-powered timers connected to the tap to make sure your garden has just the right amount of water at the right time, even when you are away or on holiday.
And with the new jet adjustment, you just need two fingers for perfect, targeted irrigation with no waste!





COLIBRÌ SYSTEM

Underground irrigation
for small gardens



EXTERNAL JET ADJUSTMENT
WITH JUST TWO FINGERS

GEAR-DRIVEN TURBINE
WITH JET-INTERCEPTING HEAD

WASHABLE FILTER

BODY AND ROD
IN SHOCKPROOF ABS

STAINLESS STEEL RETURN SPRING

NON-SPILL RUBBER VALVE
WITH FROST-RESISTANT
DEVICE

INFO

360° COLIBRÌ MICRO-SPRINKLER
90210

180° COLIBRÌ MICRO-SPRINKLER
90220

90° COLIBRÌ MICRO-SPRINKLER
90230



Underground micro-sprinkler with low water consumption. Ideal for watering vegetable patches and small gardens, even at low pressure.
Gear-driven device made from acetal resin.
External adjustment of range.

Height from ground: 2" (5 cm).





code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90210		12	4 x 14,3 x 4	23,7 x 17,5 x 16,5	0,007	1,10	1512	8 000625 902101
90220		12	4 x 14,3 x 4	23,7 x 17,5 x 16,5	0,007	1,10	1512	8 000625 902200
90230		12	4 x 14,3 x 4	23,7 x 17,5 x 16,5	0,007	1,10	1512	8 000625 902309

90210

360°			r	
BAR	l/min	m²		
1,5	4,0	38,5	r 3,5 m	5,0 m
2,0	4,5	50,2	r 4,0 m	5,7 m
3,0	5,1	63,6	r 4,5 m	6,4 m

90220

180°			r	
BAR	l/min	m²		
1,5	2,9	25,1	r 4,0 m	5,7 m
2,0	3,3	31,8	r 4,5 m	6,4 m
3,0	3,6	34,7	r 4,7 m	6,7 m

90230

90°			r	
BAR	l/min	m²		
1,5	1,7	9,6	r 3,5 m	5,0 m
2,0	2,0	13,8	r 4,2 m	6,0 m
3,0	2,1	13,8	r 4,2 m	6,0 m


GUARD COLLAR
90250





For optimum installation of Colibrì micro-sprinklers.
Traps sand and pebbles from the soil.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90250		10	8 x 6,5 x 3,5	10 x 39 x 13	0,005	0,30	1200	8 000625 902507

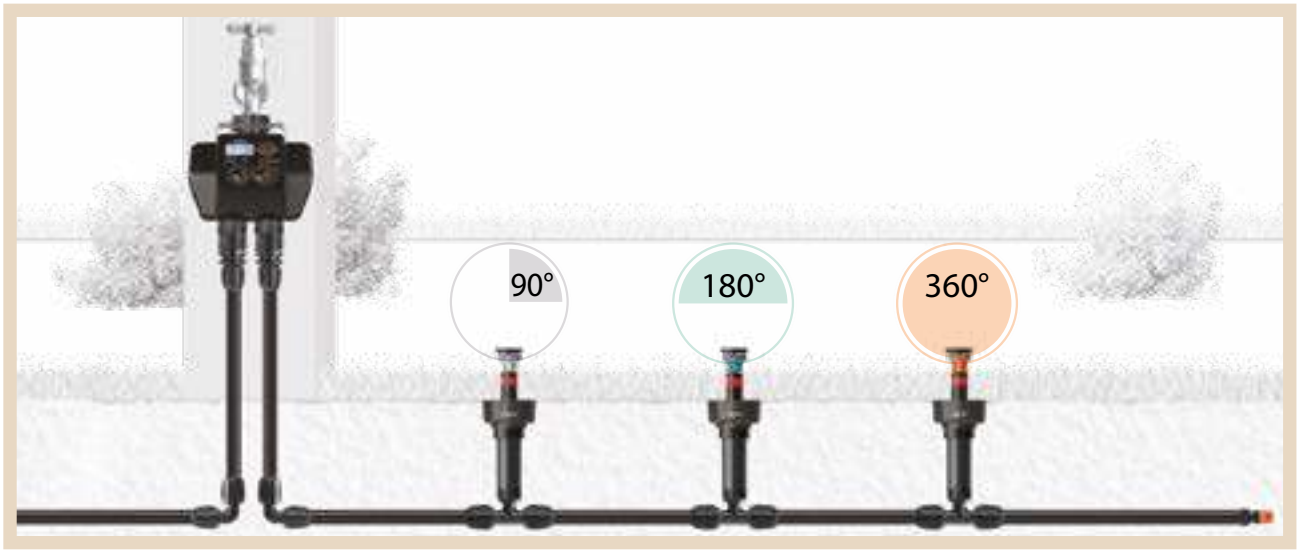

COLIBRI STARTER KIT

90200





Starter kit for an underground watering system for 50 m² garden, complete with Colibrì System micro-sprinklers. Additional micro-sprinklers and Colibrì System accessories are also available as required.
The compact colour packaging features easy assembly instructions of all kit components.


CONTAINS

3291	Main tube 25 m	x 1	**91072**	1/2" (15-21 mm) threaded 3 - way connector	x 3
91347	1/2" hose threaded adaptor	x 1	**90920**	Threaded drainage valve	x 1
91494	3/4" automatic adaptor	x 1	**90210**	360° - 2" micro-sprinkler	x 1
91081	1/2" elbow coupling	x 5	**90220**	180°- 2" micro-sprinkler	x 4
91071	1/2" tee	x 2	**91096**	Tube clamp	x 24
91082	1/2" (15-21 mm) threaded elbow	x 2	**90250**	Guard collars	x 5

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90200		1	40 x 40 x 12	40 x 40 x 12	0,019	2,70	54

8 000625 902002

EXAMPLE OF SYSTEM WITH THE COLIBRÌ STARTER KIT

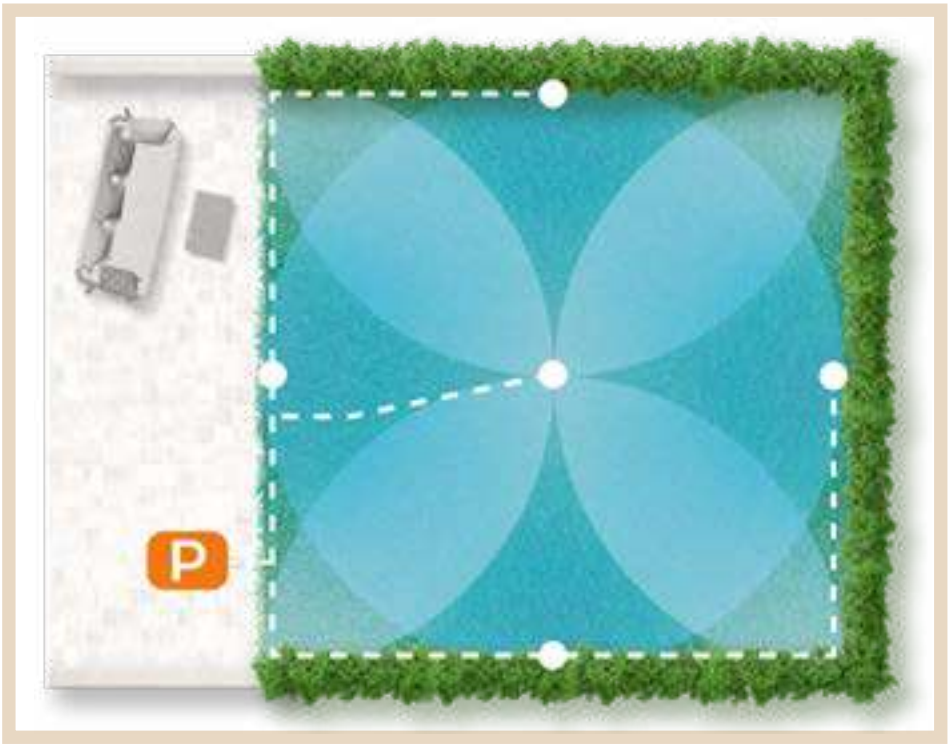

MAIN REQUIREMENTS:

- Pressure: minimum 2.5 bars
- Flow rate: at least 21 l/min
- Garden shape: regular (square or slightly rectangular; e.g. 7 x 7 m, 8 x 7 m, 8 x 8 m)
- Water supply: water mains

FEATURES:

- The kit comes with fixed angle sprinklers (1 x 360°, 4 x 180°)
- Colibrì sprinklers have a jet of min. 3.5 m - max. 4.5 m
- The area behind the sprinklers is also watered for about 30-40 cm.



The underground micro-irrigation system created with the Colibrì Starter Kit can easily be automated by using a Claber one-way tap timer (Aquauno, Aquauno Plus and Tempo, from page 88).



TURBO-JET 80°-360° - 3"

90264



Dynamic pop-up sprinkler featuring low water consumption.
Ideal for small gardens, even with low water pressure.
Special internal gear mechanism rotating at constant speed, guaranteeing balanced watering.
Working arc adjustable from 80° to 360°. Jet range adjustable by turning the ring nut.
Inspectable and washable filter. Standard 1/2" (15-21 mm) threaded base.
Height from ground 3" (cm 7,5).
Packs of 12 pcs.

		90°			180°			360°	
BAR	l/min	r		l/min	r		l/min	r	
1,5	1,48	4,0	4,8 m	2,56	3,5	4,2 m	4,67	3,6	4,3 m
2,0	1,73	4,5	5,4 m	2,85	4,5	5,4 m	5,27	4,25	5,1 m
3,0	2,07	5,25	6,3 m	3,46	5,0	6,0 m	6,41	5,0	6,0 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90264		12	5,1 x 14 x 5,1	10 x 39 x 13	0,005	1,10	1440	8 000625 902644

TURBO-JET 80°-360° - 4"

90266



Dynamic pop-up sprinkler featuring low water consumption.
Ideal for small gardens, even with low water pressure.
Special internal gear mechanism rotating at constant speed, guaranteeing balanced watering.
Working arc adjustable from 80° to 360°. Jet range adjustable by turning the ring nut.
Inspectable and washable filter. Standard 1/2" (15-21 mm) threaded base.
Height from ground 4" (cm 10).
Packs of 12 pcs.

		90°			180°			360°	
BAR	l/min	r		l/min	r		l/min	r	
1,5	1,48	4,0	4,8 m	2,56	3,5	4,2 m	4,67	3,6	4,3 m
2,0	1,73	4,5	5,4 m	2,85	4,5	5,4 m	5,27	4,25	5,1 m
3,0	2,07	5,25	6,3 m	3,46	5,0	6,0 m	6,41	5,0	6,0 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90266		12	5,1 x 14 x 5,1	10 x 39 x 13	0,005	1,16	1440	8 000625 902668



MULTIPLA TIMERS

Multipla timers are the perfect synthesis of technology, design, ease of use and versatility, with the option to choose from different preset programmes on 6 independent lines, simply by turning a dial.
The large LCD display shows how many minutes remain until the next irrigation cycle and the countdown for the irrigation cycle in progress.
Multipla is made of materials resistant to humidity, UV rays and weathering, and comes in two versions: with a 24 V transformer or operated by a 9 V alkaline battery, which lasts for the whole season.
Multipla brings underground irrigation to areas without mains electricity connections.



MULTIPLA AC 230/24 V LCD

8058





Easy-to-program 6-line electronic timer: just turn the 6 dials to set the required irrigation schedule: 5 - 10 - 15 - 20 - 30 - 60 minutes.
There is a frequency control for selecting the repetition of the watering programme at predefined intervals: 8h - 12h - 24h - 2 days - 3 days - 4 days - 7 days.
There is a start button for immediate activation of the programme or the manual function for the system test phase - "start + ... hours" button for a 23-hour delay in activation of the programme.
An intermittent LED system indicates valve opening.
A safety timer delays valve opening by 5 seconds. Pump control. 9 V buffer battery.
External 220 - 24 V transformer included.
Compliant with CE standards.
Designed for direct connection to the Rain Sensor.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8058		1	22 x 22 x 12,5	22 x 22 x 12,5	0,004	1,42	84	8 000625 080588

MULTIPLA DC 9 V LCD

8060





Easy-to-program 6-line electronic timer: just turn the 6 dials to set the required irrigation schedule: 5 - 10 - 15 - 20 - 30 - 60 minutes.
There is a frequency control for selecting the repetition of the watering programme at predefined intervals: 8h - 12h - 24h - 2 days - 3 days - 4 days - 7 days.
There is a start button for immediate activation of the programme or the manual function for the system test phase - "start + ... hours" button for a 23-hour delay in activation of the programme.
An intermittent LED system indicates valve opening.
A safety timer delays valve opening by 5 seconds.
Powered by two 9 V alkaline batteries, sufficient for an entire season.
Compliant with CE standards.
Designed for direct connection to the Rain Sensor.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8060		1	22 x 22 x 7,5	22 x 22 x 7,5	0,004	0,88	144	8 000625 080601

AQUA-HOME 4-6-8

Aqua-Home is the underground irrigation timer designed to guarantee professional performance in any type of garden. With its compact and elegant design, it is easy to install and use; it is equipped with a large LCD display, 4 buttons and a dial to manage watering on up to 8 lines. What's more, it is innovative and ultra reliable! Instead of a traditional buffer battery, it has a super capacitor (SuperCap) with a practically unlimited duration.
SuperCap stores enough energy to keep the timer settings stored if the power supply is temporarily interrupted.



INFO

AQUA-HOME 4-6-8

8022



A timer for up to 8 watering lines that is easy to install and use, with a dial, 4 buttons and a large LCD display which makes the set data easy to read.
The watering duration can be set (from 1 minute to 4 hours and 15 minutes) for each line, with two independent watering cycles and up to 4 daily starts per cycle.
Offering useful functions such as setting the irrigation frequency (weekly, cyclical from 1 to 12 days, even/odd days), Water Budget to change watering from between 0% and 200%, Rain-Stop when it rains. Manual irrigation is also possible and can be customised between 5 minutes and 4 hours and 15 minutes.
Aqua-Home is equipped with an internal capacitor (SuperCap), which stores energy when the timer is operating normally.
This means it retains the timer settings, should the electrical power supply temporarily fail (saved in the memory for up to 2 days).
Irrigation can also be set to semi-automatic. 230 V AC external transformer included.
Designed for direct connection to the Rain Sensor (90915).



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
8022		1	22 x 22 x 7,5	22 x 22 x 7,5	0,004	0,93	144	8 000625 080229

RAIN SENSOR

90915



Suitable for all watering systems, the rain sensor avoids unnecessary wastage of water by turning the sprinklers off when it is raining. When the internal flow reaches a level of 5 mm of rain per square metre, the system shuts down.
Programmed watering automatically resumes when the water in the sensor evaporates.
The rain sensor should be installed in an outdoor
area exposed to rain using the stainless steel bracket provided.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90915		2	8,5 x 11 x 20,5	25 x 19 x 10	0,005	0,64	288	8 000625 909155

HYDRO-4®

WEBSITE

Modern lifestyles and ways of living are reflected in a steady move towards small- and medium-sized gardens.
When it comes to watering these green spaces, Claber has come up with the answer: Hydro-4.
A single watertight valve box with built-in battery-powered timer and 4 solenoid valves, ready for quick DIY installation.
HYDRO-4 can be installed above-ground or underground and controls up to 4 underground, drip or above-ground irrigation lines for your lawn, flowerbed or vegetable patch. Unparalleled versatility!
Hydro-4 is IP68 certified and set up for a cableless connection with the RF Rain Sensor.





HYDRO-4

Irrigation made to measure



SIMPLE PROGRAMMING
JUST 3 BUTTONS



NO ELECTRICAL CONNECTIONS,
IDEAL AS A DIY PROJECT



A SINGLE SOLUTION
4 IRRIGATION LINES



PRACTICAL AND VERSATILE
FOR GARDENS UP TO 700 m²

COMPATIBLE WITH UNDERGROUND,
ABOVE-GROUND AND DRIP IRRIGATION

HYDRO-4

90829





Preassembled valve box incorporating 4 solenoid and a timer.
Power provided by two 1.5 V AAA batteries, enough to last an entire season.
On/off control for up to 4 independent underground or drip irrigation lines.
Easy programming procedure, using just 3 buttons and a large size display.
Watering time 1 to 60 minutes. 2 programs for each outlet, up to 8 watering cycles per day.
Weekly setting, allowing exclusion of single days.
Manual test of 5 minutes duration, variable in the same way as for watering times.
A perfectly sealed IP 68 unit.
Protective cover and buttons in bi-material rubber.
Facility of viewing and deleting programs entered for each line.
3/4" M (20-27 mm) connections on both inlet and outlet sides.
Wireless connection to radio frequency Rain Sensor.
5 threaded caps provided for unused outlets.
4 solenoids valves.

Watering line flow rates: max 25 l/min at 2,5 bar.
Operating pressure: min 1 - max 6 bar.
Operating temperature: 3 - 60 °C.
Dimensions: diameter 200 - height 153 mm.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90829		1	25 x 23 x 17	25 x 23 x 17	0,010	2,50	60	8 000625 908295

RF RAIN SENSOR

90831





Rain sensor operating on radio frequency. Suspends watering in case of rainfall.
Dialogues with Tempo and Dual timers, the radio frequency system and Hydro-4.
The RF Rain Sensor is designed for open air installation, exposed to rainfall, using a special stainless steel bracket supplied with the product. No electrical connections are required: RF coverage up to 30 m. Powered by 2 x 1.5 V AA alkaline batteries.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90831		1	8,5 x 11 x 20,5	8,5 x 11 x 20,5	0,002	0,23	288	8 000625 908318

PROGRAMMABLE UNITS

The "Elettra" programmable solenoid valve is a practical and reliable solution for programming irrigation systems without an electrical power supply.
As an alternative to valve box installation, there is a control unit powered by a 9 V alkaline battery, which allows you to open and close individual solenoid valves from the outside.
The new removable control units are also designed to guarantee IP 68 grade protection, the highest rating against water, solids and dust.



CONTROL UNIT

90821





From a field station, the unit will pilot the opening and closing movements of one or two 9 V bistable solenoid valves installed in valve boxes.
Protected by 100% sealed cover operates also in total submersion.
Easy to program with three keys only. Irrigation time from 1 min to 23 h. 59 min.
With option of up to 6 irrigation cycles per day.
Manual and weekly programming with exclusion of specific weekdays as required.
Connected to a rain sensor (code 90915), the unit will suspend watering operations in the event of rainfall greater than 5mm per square metre.
Operates with a 9 V battery, sufficient for an entire season.
The control unit can be wall-mounted, using a special bracket, for ease of programming and practical maintenance.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90821		1	11 x 11,5 x 19,5	11 x 19,5 x 11,5	0,002	0,58	240	8 000625 908219

1" (26-34 mm) F. PROGRAMMABLE SOLENOID VALVE

90826





Can be installed directly on the tap or water well outlet. Protected by 100% sealed cover operates also in total submersion.
Easy to program with three keys only.
Irrigation time from 1 min to 23 h. 59 min.
With option of up to 6 irrigation cycles per day.
Manual and weekly programming with exclusion of specific weekdays as required.
Bistable 9 V solenoid with low power consumption.
Operates with a 9 V battery, sufficient for an entire season.
Electronic section separable from hydraulic section for easy programming or storage during winter.
Operating pressure from 0,5 to 12 bar. 1" (26-34 mm) female inlet and outlet thread.
Flow rate from 4,6 to 96 l/min. Operating temperature range +5° to +70°.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90826		1	18,7 x 19,5 x 11	18 x 10,5 x 19	0,003	0,88	144	8 000625 908264

SOLENOID VALVES

This range of solenoid valves is reliable and long-lasting, thanks to the materials they are made of: metal parts are made of stainless steel and the body of nylon reinforced with glass fibre. 100% tried and tested, even at high pressure, they feature a manual opening/shut-off and solenoid rotation control. With a slow shut-off device to prevent pressure shock, solenoid valves have an operating pressure of 0.5-12 bar. Thanks to the new solenoid fitted with an anti-sand filter, which collects the impurities in the water and filters them from the irrigation circuit, Claber solenoid valves are top of the range.

9 V - 1" (26-34 mm) FEMALE SOLENOID VALVE

90812





Solenoid valve equipped with solenoid with anti-sand filter. Works with the Multipla 9 V timer (cod. 8060) or with the 9 V control unit (cod. 90821). With 1" (26-34 mm) female inlet and outlet thread. Body in fibre glass reinforced nylon, stainless steel metal components. Low speed shut-off device to prevent pressure shock. Optional manual opening/shut-off control. Operating pressure from 0,5 to 12 bar.
Flow rate from 4,6 to 96 l/min. Operating temperature range +5° to +70°.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90812		1	16 x 13 x 8,2	16 x 13 x 8,2	0,002	0,38	288

8 000625 908127

9 V - 1" (26-34 mm) MALE SOLENOID VALVE

90813





Solenoid valve equipped with solenoid with anti-sand filter. Works with the Multipla 9 V timer (cod. 8060) or with the 9 V control unit (cod. 90821). With 1" (26-34 mm) male inlet and outlet thread. Body in fibre glass reinforced nylon, stainless steel metal components. Low speed shut-off device to prevent pressure shock. Optional manual opening/shut-off control.
Operating pressure from 0,5 to 12 bar. Flow rate from 4,6 to 96 l/min.
Operating temperature range +5° to +70°.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90813		1	16 x 13 x 8,2	16 x 13 x 8,2	0,002	0,37	288

8 000625 908134

24 V - 1" (26-34 mm) FEMALE SOLENOID VALVE

90814





Solenoid valve equipped with solenoid with anti-sand filter. Reinforced structure to withstand mechanical and thermal stresses. Operates with all types of multi-line timers at 24 V AC. With 1" (26-34 mm) female inlet and outlet thread. Body in fibre glass reinforced nylon, stainless steel metal components. Low speed shut-off device to prevent pressure shock. Optional manual opening/shut-off control. Operating pressure from 0,5 to 12 bar. Flow rate from 4,6 to 96 l/min. Operating temperature range +5° to +70°.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90814		1	16 x 13 x 8,2	16 x 13 x 8,2	0,002	0,38	288

8 000625 908141

24 V - 1" (26-34 mm) MALE SOLENOID VALVE

90815





Solenoid valve equipped with solenoid with anti-sand filter. Reinforced structure to withstand mechanical and thermal stresses. Operates with all types of multi-line timers at 24 V AC. With 1" (26-34 mm) male inlet and outlet thread. Body in fibre glass reinforced nylon, stainless steel metal components. Low speed shut-off device to prevent pressure shock. Optional manual opening/shut-off control. Operating pressure from 0,5 to 12 bar. Flow rate from 4,6 to 96 l/min. Operating temperature range +5° to +70°.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90815		1	16 x 13 x 8,2	16 x 13 x 8,2	0,002	0,37	288

8 000625 908158

UNDERGROUND IRRIGATION				
CODE		**8058**	**8060**	**8022**
DESCRIPTION		**MULTIPLA AC 230/24 V LCD**	**MULTIPLA DC 9 V LCD**	**AQUA-HOME 4-6-8**
				
Power supply	battery	buffer - **1 x** 9V ALKALINE	**2 x** 9V ALKALINE	
	transformer	external 230-24V		external 230-24V
Protection rating				
No. of lines				
No. of programmable solenoid valves		1 to 6	1 to 6	1 to 8
Display		✓	✓	✓
Operating temperature		3 - 50 °C	3 - 50 °C	3 - 50 °C
Controls		7 rotary knobs and 2 buttons	7 rotary knobs and 2 buttons	1 rotary knob and 4 buttons
No. of programmes		1	1	2
Irrigation duration		5 - 60 mins	5 - 60 mins	1 min - 4 h 15 mins
Watering frequency		from 3 per day to 1 per week	from 3 per day to 1 per week	from 8 per day (per line) to 1 every 12 days
Weekly programming		—	—	✓
Manual mode		✓	✓	✓
Duration of manual irrigation		5 mins (early stop possible)	5 mins (early stop possible)	min. 5 mins - max. 4 h 15 mins (early stop possible)
Delayed start		Yes, up to 23 hours	Yes, up to 23 hours	You set the start time
Watering in progress indicator		YES (sprinkler icon and line number)	YES (sprinkler icon and line number)	YES (dial above set programme number flashes)
Flat battery indicator		✓	✓	—
Rain Sensor connection		YES, with wired rain sensor (90915)	YES, with wired rain sensor (90915)	YES, with wired rain sensor (90915)
Wall bracket		✓	✓	✓
Warranty		3 years	3 years	3 years

		
90829	**90821**	**90826**
HYDRO-4	**CONTROL UNIT**	**F. PROGRAMMABLE SOLENOID VALVE**
		
2 x AAA 1,5V ALKALINE	**1 x** 9V 9V ALKALINE	**1 x** 9V 9V ALKALINE
IP68	IP68	IP68
4		1
	1 to 2	
✓	✓	✓
3 - 60 °C	5 - 70 °C	5 - 70 °C
3 buttons	3 buttons	3 buttons
2	3 per line	6
1 - 60 mins	1 min - 23 h 59 mins	1 min - 23 h 59 mins
from 8 per day (per line) to 1 per week	from 3 per day (per line) to 1 per week	from 6 per day to 1 per week
✓	✓	✓
✓	✓	✓
min. 1 min - max. 60 mins (early stop possible)	5 mins (early stop possible)	5 mins (early stop possible)
You set the start time	You set the start time	You set the start time
YES (set programme number flash)	YES (set programme number flash)	YES (set programme number flash)
✓	✓	✓
YES, with radio frequency rain sensor (90831)	YES, with wired rain sensor (90915)	NO
—	✓	—
3 years	3 years	3 years

POP-UP SPRINKLERS

From Claber years of professional experience comes the pop-up sprinkler range. Designed and created to solve all your watering needs, these sprinklers are simple to use, while offering exclusive functional features.
Claber pop-up come with 90°, 180° or 360° jets, or adjustable 0-350° jets. For long, narrow spaces there are square or rectangular area pop-up sprinklers.
The jet can be easily adjusted at any time, using any standard hex key.





STAINLESS STEEL JET RANGE ADJUSTMENT SCREW WITH HEXAGONAL INSERT

WASHABLE FILTER TO ENSURE HIGH FILTERING POWER

STAINLESS STEEL RETURN SPRING

SELF-LUBRICATING CLUTCH (DELRIN) FOR ORIENTATION OF THE JET



SPECIAL PROFILE NOZZLE FOR UNIFORM, BALANCED JET DISTRIBUTION

HEAD ADJUSTABLE FROM 0° TO 350° WITH RING NUT SELF-LOCKING MECHANISM

BODY AND ROD MADE OF SHOCK-RESISTANT PLASTIC (ABS)

NON-SPILL RUBBER CHECK VALVE WITH FROST-RESISTANT DEVICE

SEALING GASKETS FOR LEAKAGE-FREE INSTALLATION

0° - 350° - 2" ADJUSTABLE POP-UP (5 cm)

90004

0° - 350° - 3" ADJUSTABLE POP-UP (7,5 cm)

90005

0° - 350° - 4" ADJUSTABLE POP-UP (10 cm)

90006

Professional static sprinkler with 0-350° adjustable head. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation. The nozzle has a specially designed profile to ensure uniform and balanced water distribution. Stainless steel jet range adjustment screw.
The standard 1/2" (15-21 mm)female connector allows it to be mounted on existing systems.
Comes in pack of 24 pcs. Irrigated area max. 78 m².

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90004		24	3,7 x 10,9 x 3,7	20 x 39 x 13	0,010	1,45	1728	8 000625 900046
90005		24	3,7 x 13,4 x 3,7	20 x 39 x 13	0,010	1,60	1728	8 000625 900053
90006		24	3,7 x 16 x 3,7	20 x 39 x 13	0,010	1,80	1728	8 000625 900060

0°-350°



0°-350°	90°	180°	270°	350°	r	
BAR	l/min	l/min	l/min	l/min		
1,5	2,8	5,3	7,7	9,2	r 4,0 m	5,7 m
2,0	3,3	5,8	9,0	10,8	r 4,5 m	6,4 m
3,0	4,0	6,9	10,8	13,0	r 5,0 m	7,1 m

ADJUSTABLE POP-UP 0° - 350° 6 L/MIN - 2" (5 cm)

90020

ADJUSTABLE POP-UP 0° - 350° 6 L/MIN - 4" (10 cm)

90019

A professional-quality static pop-up sprinkler with an adjustable head from 0° to 350°, that guarantees even irrigation and minimal water consumption (6 l/min).
It is equipped with a screw to adjust the jet with a hexagonal insert, stainless steel return spring, filter, self-lubricating clutch and non-spill rubber valve with an anti-freeze device. The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems.
Comes in pack of 24 pcs. Irrigated area max. 55 m².

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90020		24	3,7 x 10,9 x 3,7	20 x 39 x 13	0,010	1,42	1728	8 000625 900206
90019		24	3,7 x 16 x 3,7	20 x 39 x 13	0,010	1,80	1728	8 000625 900190

0°-350°



0°-350°	90°	180°	270°	350°	r	
BAR	l/min	l/min	l/min	l/min		
1,5	2,0	3,3	4,5	6,0	r 3,7 m	5,3 m
2,0	2,2	3,6	5,2	6,8	r 4,0 m	5,7 m
3,0	2,5	4,4	6,4	8,2	r 4,2 m	6,0 m

0° - 350° ADJUSTABLE HEAD

90007



Made of shock-resistant ABS plastic.
Filter with support provided.
Stainless steel jet range adjustment screw.
Compatible with other brand sprinklers.
Blister of 1 pc.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90007		12	7,9 x 15,7 x 2,8	25 x 19 x 10	0,005	0,30	1728	8 000625 900077

360° JET POP-UP - 2" (5 cm)

90041

360° JET POP-UP - 4" (10 cm)

90043

Professional static sprinkler with 360° head. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation. The nozzle has a specially designed profile to ensure uniform and balanced water distribution. Stainless steel jet range adjustment screw.
The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems.
Comes in pack of 12 pcs. Irrigated area max. 58 m².

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90041		12	3,7 x 11 x 3,7	10 x 39 x 13	0,005	0,78	1440	8 000625 900411
90043		12	3,7 x 16 x 3,7	10 x 39 x 13	0,005	0,93	1440	8 000625 900435



360°			r	
BAR	l/min	m²		
1,5	8,2	43,0	r 3,7 m	5,3 m
2,0	9,5	50,3	r 4,0 m	5,7 m
3,0	11,5	56,7	r 4,3 m	6,0 m

360°

360° HEAD

90044





Made of shock-resistant ABS plastic.
Filter with support provided.
Stainless steel jet range adjustment screw.
Compatible with other brand sprinklers.
Blister of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90044		12	7,9 x 15,7 x 2,8	25 x 19 x 10	0,005	0,30	1728	8 000625 900442

180° JET POP-UP - 2" (5 cm)

90053

180° JET POP-UP - 4" (10 cm)

90055

Professional static sprinkler with 180° head. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation.
The nozzle has a specially designed profile to ensure uniform and balanced water distribution. Stainless steel jet range adjustment screw. The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems. Comes in pack of 12 pcs. Irrigated area max. 31,8 m².

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90053		12	3,7 x 11 x 3,7	10 x 39 x 13	0,005	0,78	1440	8 000625 900534
90055		12	3,7 x 16 x 3,7	10 x 39 x 13	0,005	0,95	1440	8 000625 900558



180°			r	
BAR	l/min	m²		
1,5	5,1	25,1	r 4,0 m	5,7 m
2,0	6,0	29,0	r 4,3 m	6,0 m
3,0	7,1	31,8	r 4,5 m	6,4 m

180°

180° HEAD

90056





Made of shock-resistant ABS plastic.
Filter with support provided.
Stainless steel jet range adjustment screw.
Compatible with other brand sprinklers.
Blister of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90056		12	7,9 x 15,7 x 2,8	25 x 19 x 10	0,005	0,30	1728	8 000625 900565

90° JET POP-UP - 2" (5 cm)

90095

90° JET POP-UP - 4" (10 cm)

90097

Professional static sprinkler with 90° head. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation. The nozzle has a specially designed profile to ensure uniform and balanced water distribution.
Stainless steel jet range adjustment screw.
The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems.
Comes in pack of 12 pcs. Irrigated area max. 12,6 m².

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90095		12	3,7 x 11 x 3,7	10 x 39 x 13	0,005	0,78	1440	8 000625 900954
90097		12	3,7 x 16 x 3,7	10 x 39 x 13	0,005	0,93	1440	8 000625 900978



90°			r	
BAR	l/min	m²		
1,5	2,8	8,6	r 3,3 m	4,6 m
2,0	3,2	9,6	r 3,5 m	4,9 m
3,0	3,9	12,6	r 4,0 m	5,7 m

90°

90° HEAD

90098





Made of shock-resistant ABS plastic.
Filter with support provided.
Stainless steel jet range adjustment screw.
Compatible with other brand sprinklers.
Blister of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90098		12	7,9 x 15,7 x 2,8	25 x 19 x 10	0,025	0,30	1728	8 000625 900985



SQUARE AREA POP-UP - 4" (10 cm)

90133



Professional static sprinkler with square area. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation. The nozzle has a specially designed profile to ensure uniform and balanced water distribution. Stainless steel jet range adjustment screw.
The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems.
Height from ground 4" (10 cm). Comes in pack of 12 pcs.
Irrigated area max. 64 m².

BAR	l/min	m²	A B	
1,5	8,9	36,0	6 x 6 m	5,5 m
2,0	10,3	49,0	7 x 7 m	6,3 m
3,0	12,6	64,0	8 x 8 m	7,3 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90133		12	3,7 x 16 x 3,7	10 x 39 x 13	0,005	0,95	1440

8 000625 901333

SQUARE AREA HEAD

90134





Square area head: made of shock-resistant ABS plastic. Filter with support provided. Stainless steel jet range adjustment screw. Compatible with other brand sprinklers. Blister of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90134		12	7,9 x 15,7 x 2,8	25 x 19 x 10	0,005	0,30	1728

8 000625 901340

CENTRE-STRIP POP-UP - 4" (10 cm)

90109



Professional static sprinkler with centre-strip. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation. The nozzle has a specially designed profile to ensure uniform and balanced water distribution. Stainless steel jet range adjustment screw.
The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems.
Height from ground 4" (10 cm). Comes in pack of 12 pcs.
Irrigated area max. 20,3 m².

BAR	l/min	m²	A B	
1,5	6,8	13,2	12,0 x 1,1 m	
2,0	8,3	17,2	13,2 x 1,3 m	
3,0	10,2	20,3	13,5 x 1,5 m	1,2 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90109		12	3,7 x 16 x 3,7	10 x 39 x 13	0,005	0,97	1440

8 000625 901098

CENTRE-STRIP HEAD

90110





Centre-strip head: made of shock-resistant ABS plastic.
Filter with support provided. Stainless steel jet range adjustment screw.
Compatible with other brand sprinklers. Blister of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90110		12	7,9 x 15,7 x 2,8	25 x 19 x 10	0,005	0,30	1728


8 000625 901104

END-STRIP POP-UP - 4" (10 cm)

90121



Professional static sprinkler with end-strip. The choice of materials and quality of the production process are the guarantee of total reliability in any type of installation.
The nozzle has a specially designed profile to ensure uniform and balanced water distribution. Stainless steel jet range adjustment screw. The standard 1/2" (15-21 mm) female connector allows it to be mounted on existing systems.
Height from ground 4" (10 cm). Comes in pack of 12 pcs.
Irrigated area max. 11,2 m².



BAR	l/min	m²	A B	
1,5	3,8	8,0	8,0 x 1,0 m	
2,0	4,4	9,1	8,3 x 1,1 m	
3,0	5,4	11,2	9,3 x 1,2 m	1,1 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90121		12	3,7 x 16 x 3,7	10 x 39 x 13	0,005	0,95	1440

8 000625 901210

END-STRIP HEAD

90122





End-strip head: made of shock-resistant ABS plastic. Filter with support provided.
Stainless steel jet range adjustment screw.
Compatible with other brand sprinklers.
Blister of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90122		12	7,9 x 15,7 x 2,8	25 x 19 x 10	0,005	0,31	1728

8 000625 901227

SET OF POP-UP SPARE PARTS

90124





Set of spare parts comprising:
- 2 pop-up ring nuts
- 4 pop-up sealing gaskets for Pop-up, Colibrì and Turbo-Jet.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90124		12	7,9 x 15,7 x 2,8	25 x 19 x 10	0,005	0,46	1728

8 000625 901241

SET OF SPARE POP-UP AND COLIBRÌ FILTERS

90123





5 replacement filters for Pop-up and Colibrì sprinklers.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90123		12	7,9 x 15,7 x 2	25 x 19 x 10	0,005	0,33	1728

8 000625 901234




TURBINES

Claber's range of turbine sprinklers is carefully designed to best meet the irrigation needs of medium-sized and large gardens. Total reliability, versatility of use and silence during operation make the Claber turbines the ideal solution for professional quality DIY systems. The many regulation options, from the angle of rotation to the range of the jet, ensure the best irrigation efficiency.





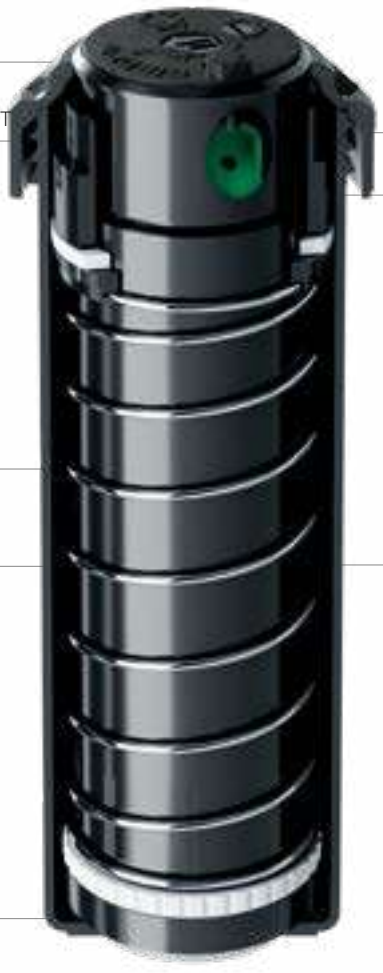

MEDIUM-JET TURBINE SPRINKLER

90474







Medium-jet turbine sprinklers with interchangeable nozzles. A working range that can be adjusted from 40° to 360°, with just a simple flat head screwdriver, a pointer on the lid showing the selected work arc. The sprinkler can be regulated before installation, after installation in a static position, or during operation. A special mechanism avoids damage to the gears during regulation. Internal removable filter. Running pressure from 1.5 to 4 bars. Radius from 4 to 9 m. 1/2" (15-21 mm) screw base. Height from ground 4" (10 cm). Packs of 12 pcs. Irrigated area max. 254 m².

40°-360°			r	
BAR		l/min		
1	0,75	2,7	r 4,8 m	6,8 m
	1	4,4	r 5,8 m	8,2 m
	1,5	4,5	r 6,7 m	9,5 m
	2	6,0	r 7,2 m	10,2 m
	3	9,4	r 8,0 m	11,3 m

40°-360°			r	
BAR		l/min		
2	0,75	2,8	r 5,0 m	7,1 m
	1	4,8	r 5,9 m	8,3 m
	1,5	5,1	r 6,9 m	9,8 m
	2	6,6	r 7,5 m	10,6 m
	3	10,0	r 8,4 m	11,9 m

40°-360°			r	
BAR		l/min		
3	0,75	3,1	r 5,2 m	7,4 m
	1	5,8	r 6,3 m	8,9 m
	1,5	6,7	r 7,2 m	10,2 m
	2	8,3	r 8,1 m	11,5 m
	3	11,8	r 9,0 m	12,7 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90474		12	7 x 15,5 x 6,5	18 x 40 x 18	0,012	2,21	840

8 000625 904747

LONG-JET TURBINE SPRINKLER

90478







Large jet turbine sprinkler with 9 interchangeable nozzles. Adjustable between 40° and 360° with continuous rotation. Adjustable jet with proportional reduction of the flow rate to ensure optimal uniformity of distribution and reduce consumption by up to 30%. Slits to remove any sand contained in the water. Pull-out internal filter. Silent thanks to internal lubrication. Protrudes 5" (12.5 cm) from earth. 3/4" (20-27 mm) F threaded base. Rubber cover to ensure a long product life by preventing any impurities from getting in. Provided with adjustment key. Maximum watering area 670 m².

40°-360°			r	
BAR		l/min		
2	1	4,5	r 10,1 m	14,3 m
	1,5	5,7	r 11,0 m	15,5 m
	2	6,8	r 10,7 m	15,1 m
	2,5	9,5	r 11,3 m	15,9 m
	3	11,4	r 11,0 m	15,5 m
	4	15,1	r 11,3 m	15,9 m
	5	18,2	r 11,3 m	15,9 m
	6	22,7	r 12,2 m	17,2 m
	8	29,9	r 11,6 m	16,4 m

40°-360°			r	
BAR		l/min		
3	1	5,1	r 10,1 m	14,2 m
	1,5	7,0	r 11,3 m	15,9 m
	2	8,7	r 10,7 m	15,1 m
	2,5	11,8	r 11,6 m	16,4 m
	3	13,5	r 11,3 m	15,9 m
	4	17,8	r 11,9 m	16,8 m
	5	22,2	r 11,6 m	16,4 m
	6	26,2	r 12,5 m	17,6 m
	8	35,9	r 13,4 m	18,9 m

40°-360°			r	
BAR		l/min		
4	1	6,8	r 10,1 m	14,2 m
	1,5	8,3	r 11,6 m	16,4 m
	2	11,0	r 11,6 m	16,4 m
	2,5	14,4	r 12,2 m	17,2 m
	3	16,7	r 12,5 m	17,6 m
	4	21,2	r 12,2 m	17,2 m
	5	27,3	r 13,1 m	18,5 m
	6	31,8	r 13,4 m	18,9 m
	8	42,0	r 14,0 m	19,8 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90478		8	9 x 19,5 x 8,5	20 x 39 x 23	0,017	3,30	384

8 000625 904785

MULTI-JET TURBINE WITH LONG JET RANGE

90480







Turbine sprinkler with 4 built-in nozzles to ensure uniform irrigation at any operating angle (adjustable between 40°-360°). Use a common screwdriver to select which nozzle to use, set the working angle and adjust the flow.
Special nozzles to ensure maximum efficiency and water savings.
Excellent performance, even at low pressure. Internal filter.
Recommended operating pressure between 2 and 5 bar.
Radius between 9.8 and 11.0 m. 3/4" (20-27 mm) female threaded base, height from ground 5" (12,5 cm). Irrigated area max. 580 m².

40°-360°			r	
BAR		l/min		
1	1	3,5	r 7,5 m	10,7 m
	2	5,6	r 8,4 m	11,9 m
	3	9,3	r 7,8 m	11,1 m
	4	12,6	r 6,5 m	9,2 m


40°-360°			r	
BAR		l/min		
2	1	4,8	r 10,0 m	14,2 m
	2	7,9	r 11,0 m	15,5 m
	3	13,3	r 11,8 m	16,7 m
	4	18,5	r 11,4 m	16,2 m

40°-360°			r	
BAR		l/min		
3	1	5,9	r 10,5 m	14,9 m
	2	9,8	r 12,0 m	17,0 m
	3	16,5	r 13,0 m	18,5 m
	4	22,4	r 13,6 m	19,3 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90480		8	9 x 19 x 7,2	20 x 39 x 23	0,017	3,10	384

8 000625 904808

									
CODE		**90004**	**90005**	**90006**	**90020**	**90019**	**90041**	**90043**	**90053**	**90055**
DESCRIPTION						**STATIC SPRINKLERS**				
Type	Static	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Dynamic									
Height from ground		2" (5 cm)	3" (7,5 cm)	4" (10 cm)	2" (5 cm)	4" (10 cm)	2" (5 cm)	4" (10 cm)	2" (5 cm)	4" (10 cm)
Main material		ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS
Connector		1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F
Operating pressure		1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar
Head										
	Fixed						✓	✓	✓	✓
	Adjustable	✓	✓	✓	✓	✓				
No. of nozzles		1	1	1	1	1	1	1	1	1
Shape of irrigation area										
		0°-350°	0°-350°	0°-350°	0°-350°	0°-350°	360°	360°	180°	180°
Irrigated area max. (m^2)		78 m^2	78 m^2	78 m^2	55 m^2	55 m^2	58 m^2	58 m^2	31,8 m^2	31,8 m^2
at the pressure of		3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar
Diameter max. (m)		10	10	10	8,5	8,5	8	8	8	8
Flow rate (l/min)	Min.	9,2	9,2	9,2	6	6	7,6	7,6	4,1	4,1
	Max.	13	13	13	8,2	8,2	10,4	10,4	5,8	5,8
Removable internal filter		✓	✓	✓	✓	✓	✓	✓	✓	✓

												
90095	**90097**	**90133**	**90109**	**90121**	**90210**	**90220**	**90230**	**90264**	**90266**	**90474**	**90478**	**90480**
					TURBINE SPRINKLERS							
✓	✓	✓	✓	✓								
					✓	✓	✓	✓	✓	✓	✓	✓
2" (5 cm)	4" (10 cm)	4" (10 cm)	4" (10 cm)	4" (10 cm)	2" (5 cm)	2" (5 cm)	2" (5 cm)	3" (7,5 cm)	4" (10 cm)	4" (10 cm)	5" (12,5 cm)	5" (12,5 cm)
ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS
1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	1/2" F	3/4" F	3/4" F
1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar	1 to 3 bar
												
✓	✓	✓	✓	✓	✓	✓	✓					
								✓	✓	✓	✓	✓
1	1	1	1	1	1	1	1	1	1	5 interchangeable	9 interchangeable	4 built-in
												
90°	90°				360°	180°	90°	80°-360°	80°-360°	40°-360°	40°-360°	40°-360°
12,6 m²	12,6 m²	64 m²	20,3 m²	11,2 m²	60 m²	35 m²	18 m²	95 m²	95 m²	254 m²	670 m²	580 m²
3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	3 bar	4 bar	3 bar
9	9	7 x 7	14 x 1	17 x 1	9	9,8	9,8	9	11	18	28	27,2
3,1	3,1	8,2	6,6	3,3	3,7	2,9	2	4,4	4,4	2,7	4,5	3,5
4	4	11,8	9	4,7	5	4	2,3	7,2	7,2	11,8	42	22,4
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

UNDERGROUND ACCESSORIES

Valve boxes, pipes, connectors and accessories: there are the different components that make up an underground system. Claber means quality, durability and reliability in every detail, to ensure that your plants and lawn are always watered efficiently, at the right time and without wasting water. The Claber range also includes a sensor that stops the irrigation programme when it rains and then resumes it when the good weather returns, saving precious water.



ACCESSORIES

Everything you need

T 1" (26-34 mm) F. x 1" (26-34 mm) F. x 1" (26-34 mm) M.

90808





For connecting solenoid valves in series; o-ring seal.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90808		10	15 x 4,5 x 13	10 x 39 x 13	0,005	1,21	1200	8 000625 908080

1" (26-34 mm) F. x 1" (26-34 mm) M. ELBOW

90807





For connecting a solenoid valve; o-ring seal.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90807		10	15 x 5 x 16	10 x 39 x 13	0,005	0,94	1200	8 000625 908073

1"(26-34 mm) F. x 1" (26-34 mm) M. COUPLING

90803





Coupling for connection to solenoid valves; o-ring seal.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90803		10	15 x 4,4 x 13	10 x 39 x 13	0,005	0,72	1200	8 000625 908035

DRAINAGE VALVE

90910





For automatic circuit draining. Especially useful in areas with cold winters.
Bronze with 1/2" (15-21 mm) male thread and 3/4" (20-27 mm) adaptor.
Header bag of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90910		15 x 1	8 x 13 x 2	10 x 39 x 13	0,005	1,10	1800	8 000625 909100



3/4" F (20-27 mm)
x 3/4" F (20-27 mm) ELBOW
90709

1" F (26-34 mm)
x 1" F (26-34 mm) ELBOW
90710

3/4" F (20-27 mm)
x 3/4" F (20-27 mm)



90709

1" F (26-34 mm)
x 1" F (26-34 mm)



90710

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90709		20	Ø 5,2 x 5,2 x 3,6	10 x 39 x 13	0,005	0,75	2400	8 000625 907090
90710		20	Ø 6,2 x 6,2 x 4,4	10 x 39 x 13	0,005	1,07	2400	8 000625 907106

1/2" F (15-21 mm) x
1/2" F (15-21 mm) COUPLING
90707

3/4" F (20-27 mm) x
3/4" F (20-27 mm) COUPLING
90706

1" F (26-34 mm)
x 1" F (26-34 mm) COUPLING
90708

1/2" F (15-21 mm)
x 1/2" F (15-21 mm)



90707

3/4" F (20-27 mm)
x 3/4" F (20-27 mm)



90706

1" F (26-34 mm)
x 1" F (26-34 mm)



90708

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90707		40	Ø 3,9 x 3,9 x 3,1	10 x 39 x 13	0,005	0,73	4800	8 000625 907076
90706		40	Ø 4,1 x 3,6 x 3,6	10 x 39 x 13	0,005	0,86	4800	8 000625 907069
90708		20	Ø 4,9 x 4,5 x 4,5	10 x 39 x 13	0,005	0,85	2400	8 000625 907083

3/4" F (20-27 mm) x
1/2" F (15-21 mm) COUPLING
90704

1" F (26-34 mm) x
3/4" F (20-27 mm) COUPLING
90705

3/4" F (20-27 mm)
x 1/2" F (15-21 mm)



90704

1" F (26-34 mm)
x 3/4" F (20-27 mm)



90705

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90704		40	Ø 4,5 x 4,5 x 4,5	10 x 39 x 13	0,005	0,93	4800	8 000625 907045
90705		20	Ø 4,0 x 3,6 x 3,6	10 x 39 x 13	0,005	0,77	2400	8 000625 907052

3/4" F (20-27 mm) T
CONNECTOR
90712

1" F (26-34 mm) T
CONNECTOR
90711

3/4" F (20-27 mm)
x 3/4" F (20-27 mm)



90712

1" F (26-34 mm)
x 1" F (26-34 mm)



90711

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90712		20	Ø 6,7 x 5,2 x 3,6	10 x 39 x 13	0,005	0,94	2400	8 000625 907120
90711		20	Ø 8,1 x 6,3 x 4,4	20 x 39 x 13	0,010	1,57	1440	8 000625 907113

3/4" M (20-27 mm)
x 1/2" M (15-21 mm) NIPPLE
90703

3/4" M (20-27 mm)
x 3/4" M (20-27 mm) NIPPLE
90702

1" M (26-34 mm)
x 3/4" M (20-27 mm) NIPPLE
90701

1" (26-34 mm) M
x 1" (26-34 mm) M NIPPLE
90805

1/2" M (15-21 mm)
x 3/4" M (20-27 mm)


90703

3/4" M (20-27 mm)
x 3/4" M (20-27 mm)


90702

3/4" M (20-27 mm)
x 1" M (26-34 mm)


90701

1" M (26-34 mm)
x 1" M (26-34 mm)


90805

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90703		40	Ø 4,3 x 2,6 x 2,6	10 x 39 x 13	0,005	0,58	4800	8 000625 907038
90702		40	Ø 4,4 x 2,6 x 2,6	10 x 39 x 13	0,005	0,63	4800	8 000625 907021
90701		40	Ø 4,7 x 3,5 x 3,5	10 x 39 x 13	0,005	0,86	4800	8 000625 907014
90805		40	Ø 5 x 3,5 x 3,5	10 x 39 x 13	0,005	0,94	4800	8 000625 908059

NEW FOR 2024

1" (26-34 mm) M
3/4" (20-27 mm) F REDUCER
90809

1" M (26-34 mm)
x 3/4" F (20-27 mm)



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90809		30	3,6 x 3,0 x 3,6	10 x 39 x 13	0,005	0,48	3600	8 000625 908097

1/2" (15-21 mm) M
THREADED CAP
90714

3/4" (20-27 mm) M
THREADED CAP
90713

1" (26-34 mm) M
THREADED CAP
90715

1/2" (15-21 mm)


90714

3/4" (20-27 mm)


90713

1" M (26-34 mm)


90715

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90714		20	Ø 2,8 x 2,1 x 2,1	10 x 39 x 13	0,005	0,42	2400	8 000625 907144
90713		40	Ø 3 x 2,7 x 2,7	10 x 39 x 13	0,005	0,53	4800	8 000625 907137
90715		40	Ø 3,5 x 3,5 x 3,5	10 x 39 x 13	0,005	0,76	4800	8 000625 907151

1/2" FEMALE THREADED CAP
90801

3/4" FEMALE THREADED CAP
90802

1/2" F (15-21 mm)


90801

3/4" F (20-27 mm)


90802

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90801		20x2	1,9 x 2,7 x 2,7	10 x 39 x 13	0,005	0,40	4800	8 000625 908011
90802		20x2	2,3 x 3,3 x 3,3	10 x 39 x 13	0,005	0,52	4800	8 000625 908028

NEW FOR 2024

Ø 3/4" (20-27 mm) - 1/2" (15-21 mm) THREADED EXTENSION

90721



For fitting sprinklers to the polyethylene tubes (with compression connectors).
Can be cut to the height desired.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90721		50	11,3 x 15 x 3	20 x 39 x 13	0,010	1,46	3600

8 000625 907212

NEW FOR 2024

Ø 3/4" (20-27 mm) - 3/4" (20-27 mm) THREADED EXTENSION

90722



For fitting sprinklers to the polyethylene tubes (with compression connectors).
Can be cut to the height desired.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90722		50	14,6 x 15 x 3	20 x 39 x 13	0,010	1,74	3600

8 000625 907229

NEW FOR 2024

Ø 1/2" (15-21 mm) - 1/2" (15-21 mm) THREADED EXTENSION

90720



For fitting sprinklers to the polyethylene tubes (with compression connectors).
Can be cut to the height desired.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90720		50	10,5 x 15 x 25	20 x 39 x 13	0,010	1,37	3600

8 000625 907205

FLEXIBLE EXTENSION Ø 3/4" (20-27 mm) - 3/4" (20-27 mm)

90747





For installation of pop-up sprinklers and turbines with bracket couplings, T-connectors, elbow connectors with female elbows.
Handy when soil settles or for reaching restricted points like corners of a garden or pavement edges. Length: 35 cm. Header bag of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90747		8	8 x 33 x 2,5	10 x 39 x 13	0,005	0,75	960

8 000625 907472

FLEXIBLE EXTENSION Ø 3/4" (20-27 mm) - 1/2" (15-21 mm)

90746





For installation of pop-up sprinklers and turbines with bracket couplings, T-connectors, elbow connectors with female elbows.
Handy when soil settles or for reaching restricted points like corners of a garden or pavement edges. Length: 35 cm. Header bag of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90746		8	8 x 33 x 2,5	10 x 39 x 13	0,005	0,75	960

8 000625 907465

BRACKET COUPLING FOR Ø 32 mm HOSE

90276



For installing a sprinkler on the main line without cutting the tube.
Header bag of 2 pcs.



BRACKET COUPLING FOR Ø 25 mm HOSE

90450

BRACKET COUPLING FOR Ø 20 mm HOSE

90858

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90276		7 x 2	21 x 5 x 19	20 x 39 x 13	0,010	1,70	504	8 000625 902767
90450		8 x 2	20 x 4 x 16,5	20 x 39 x 13	0,010	1,24	576	8 000625 904501
90858		10 x 2	15 x 13 x 3,5	20 x 39 x 13	0,010	1,20	720	8 000625 908585

Ø 1" (26-34 mm) F MANUAL VALVE

90917



Single-ring female/female Ø 1" (26-34 mm) manual valve for closing water line before the solenoid valves for inspection and maintenance.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90917		5	14,5 x 7 x 17	10 x 39 x 13	0,005	0,99	600	8 000625 909179

Ø 3/4" (20-27 mm) F MANUAL VALVE

90918



Single-ring female/female Ø 3/4" (20-27 mm) manual valve for closing water line before the solenoid valves for inspection and maintenance.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90918		5	19 x 7 x 15	10 x 39 x 13	0,005	0,97	600	8 000625 909186

CIRCUIT FILTER

90919



Polypropylene filter with 1" (26-34 mm) double male thread filter cartridge made from 120 mesh stainless steel wire netting.
Maximum flow 5 m^3/h. Operating pressure from 0,5 to 8 bar.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90919		3	15 x 8 x 26	20 x 39 x 13	0,010	0,79	216	8 000625 909193

NEW FOR 2024

HYDRANT VALVE BOX

90520



Circular valve box with hinged cover, shaped to allow the hose to pass through. Connects to underground system with one of the two 3/4" F threaded outlets located underneath and to the side. Plug with OR provided to lock the unused outlet. Inside there is a metal 3/4" M metal ball valve, for easy connection of a flexible hose. Holes on the base to allow water to drain.



A mm Ø 210	B mm	H mm 140



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90520		3	21 x 14 x 21	39 x 19 x 39	0,028	2,93	72

8 000625 905201

CIRCULAR VALVE BOX


90500



Circular valve box with snap closure lid.
Lateral openings at the base.
It contains 1 valve.



A mm Ø 290	B mm	H mm 250



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90500		1	29 x 25 x 32	29 x 25 x 31	0,023	1,20	

8 000625 905003

RECTANGULAR VALVE BOX


90515



Rectangular valve box with tamper-proof lid.
Resistant to high and low temperatures and UV radiation.
It contains 4 valves.



A mm 400	B mm 510	H mm 310



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90515		1	40 x 51 x 31	40 x 50 x 31	0,062	3,30	

8 000625 905157

RECTANGULAR VALVE BOX


90510



Rectangular valve box with tamper-proof lid.
Resistant to high and low temperatures and UV radiation.
It contains 5 valves.



A mm 500	B mm 640	H mm 310



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90510		1	50 x 64 x 31	50 x 64 x 31	0,099	7,42	

8 000625 905102

QUICK-CLICK STANDPIPE

90930





Complete with bayonet rod featuring male Quick-Click connector for connecting the hoses in all garden corners.
Automatic opening and shut-off valve. 3/4" (20-27 mm) male threaded for connection to bracket.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90930		4	15 x 8 x 22	20 x 39 x 13	0,010	1,39	288

8 000625 909308

SPARE ROD FOR QUICK COUPLING VALVE INLET

90929





Bayonet rod featuring male Quick-Click connector for connecting hoses to every corner of the garden.
Header bag of 1 pc.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90929		5	14 x 24 x 4	20 x 39 x 13	0,010	0,80	360

8 000625 909292

COMPRESSION CONNECTORS AND PIPES

Available in 20, 25 and 32 mm version, the range of pipes and connectors adapts to the size of your garden for made-to-measure solutions.
These compression fittings guarantee a perfect, watertight connection, and the extensive range means you can connect up to any water outlet, branch off from the irrigation line and install any pop-up sprinklers.



Ø 20 mm PE TUBE

90372

90373





Coils of PFA6 polyethylene tube for compression connectors.
Flexible. Resistant to algae formation and low temperatures.

90372 - 15 m
90373 - 25 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90372		1	Ø 46 x 7	Ø 46 x 7	0,001	1,60		8 000625 903726
90373		1	Ø 46 x 13	Ø 46 x 13	0,016	2,70		8 000625 903733

Ø 25 mm PE TUBE

90380

90385





Coils of PFA6 polyethylene tube for compression connectors.
Flexible. Resistant to algae formation and low temperatures.

90380 - 25 m
90385 - 50 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90380		1	Ø 58 x 17,5	Ø 58 x 17,5	0,060	4,2		8 000625 903801
90385		1	Ø 58 x 25	Ø 58 x 25	0,084	8,6		8 000625 903856

Ø 32 mm PE TUBE

90390

90395





Coils of PFA6 polyethylene tube for compression connectors.
Flexible. Resistant to algae formation and low temperatures.

90390 - 25 m
90395 - 50 m

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90390		1	Ø 73 x 15	Ø 73 x 15	0,063	6,60		8 000625 903900
90395		1	Ø 86 x 19	Ø 86 x 19	0,110	13,20		8 000625 903955

1" (26-34 mm) M. THREADED CONNECTOR Ø 20 mm

90318

For connecting a polyethylene tube to a female 1" (26-34 mm) threaded water supply or solenoid valve (cod. 90812-90814).



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90318		20	4,4 x 6,7 x 4,4	10 x 39 x 13	0,005	0,88	2400	8 000625 903184

1" (26-34 mm) F. THREADED CONNECTOR Ø 20 mm

90319

For connecting a polyethylene tube to a 1" (26-34 mm) male threaded water supply or the connectors to the solenoid valves (cod. 90813 - 90815).



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90319		20	4,4 x 6,9 x 4,4	10 x 39 x 13	0,005	0,93	2400	8 000625 903191

F. 3/4" (20-27 mm) - 1/2" THREADED CONNECTOR (15-21 mm) Ø 20 mm

90320

For connecting a polyethylene tube to a 3/4" (20-27 mm) threaded tap or solenoid valve with male 3/4" (20-27 mm) or 1/2" (15-21 mm) thread.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90320		20	4,4 x 8,3 x 4,4	10 x 39 x 13	0,005	0,95	2400	8 000625 903207

COUPLING Ø 20 mm

90321

For connecting two polyethylene tubes or repairing a punctured tube.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90321		15	4,4 x 8,9 x 4,4	10 x 39 x 13	0,005	0,87	1800	8 000625 903214

ELBOW CONNECTOR Ø 20 mm

90322

For joining two polyethylene tubes at right angle.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90322		15	8 x 4,4 x 8	10 x 39 x 13	0,005	0,91	1800	8 000625 903221

T Ø 20 mm

90323

For connecting three polyethylene tubes to create a branch off.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90323		10	11,7 x 8,2 x 4,4	10 x 39 x 13	0,005	0,88	1200	8 000625 903238

1/2" (15-21 mm) M. THREADED ELBOW Ø 20 mm

90324

For connecting Colibrì micro-sprinklers, Turbo-Jet, Pop-up sprinklers at the end of 20 mm main tube.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90324		20	7,15 x 6,3 x 4,4	10 x 39 x 13	0,005	0,78	2400	8 000625 903245

1/2" (15-21 mm) M. THREADED T CONNECTOR Ø 20 mm

90325

For connecting Colibrì micro-sprinklers, Turbo-Jet, Pop-up sprinklers in series to 20 mm main tube.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90325		15	11,7 x 6,4 x 4,4	10 x 39 x 13	0,005	0,98	1800	8 000625 903252

3/4" (20-27 mm) F. THREADED ELBOW Ø 20 mm

90326

For connecting a threaded coupling or drainage valve to the end of the line.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90326		20	7,8 x 6,7 x 4,4	10 x 39 x 13	0,005	0,94	2400	8 000625 903269

END-OF-LINE PLUG Ø 20 mm

90327

For closing off one end of the polyethylene tube.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90327		20	4,4 x 4,9 x 4,4	10 x 39 x 13	0,005	0,68	2400	8 000625 903276

Ø 16 mm - Ø 20 mm COUPLING

90328

To connect two polyethylene hoses of different diameters, Ø 16 and 20 mm.



90328		20	8,3 x 4,4 x 4,4	10 x 39 x 13	0,005	0,75	2400	8 000625 903283

Ø 20 mm WALL PLATE ELBOW

90329

Wall plate elbow to connect a 20 mm polyethylene hose and a tap with 1/2" M fitting, creating a new water intake connected to the system. Attachment to wall with screws and plugs (not included).



90329		10	6 x 8,8 x 7,1	10 x 39 x 13	0,005	0,72	1200	8 000625 903290

NEW FOR 2024

CONNECTOR Ø 25 mm

90424

90524



90424 F. 3/4" (20-27 mm) THREAD For connecting a 3/4" polyethylene tube to a 3/4" (20-27 mm) male threaded tap or solenoid valve with male 3/4" (20-27 mm) thread.

90524 F. 1" (26-34 mm) THREAD For connecting a polyethylene tube to a 1" (26-34 mm) male threaded water supply or the connectors to the solenoid valve (cod. 90813-90815).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90424		15	5,2 x 8,15 x 5,2	10 x 39 x 13	0,005	0,90	1800	8 000625 904242
90524		10	5,2 x 7,7 x 5,2	10 x 39 x 13	0,005	0,68	1200	8 000625 905249

COUPLING Ø 25 mm 1" (26-34 mm) THREAD

90420



For connecting a polyethylene tube to a female 1" (26-34 mm) threaded water supply or solenoid valve (cod. 90812-90814).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90420		15	5,2 x 7,5 x 5,2	10 x 39 x 13	0,005	0,84	1800	8 000625 904204

COUPLING Ø 25 mm 3/4" (20-27 mm) THREAD

90421



For connecting a polyethylene tube to a female 3/4" (20-27 mm) threaded water supply or solenoid valve.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90421		15	5,2 x 7,05 x 5,2	10 x 39 x 13	0,005	0,81	1800	8 000625 904211

COUPLING Ø 25 mm

90419



For connecting two polyethylene tubes or repairing a punctured tube.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90419		9	5,2 x 10,2 x 5,2	10 x 39 x 13	0,005	0,82	1080	8 000625 904198

ELBOW CONNECTOR Ø 25 mm

90417



For joining two polyethylene tubes at right angle.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90417		7	5,2 x 10 x 5,2	10 x 39 x 13	0,005	0,73	840	8 000625 904174

T Ø 25 mm CONNECTOR

90422



For connecting three polyethylene tubes to create a branch off.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90422		4	5,2 x 7,5 x 5,2	10 x 39 x 13	0,005	0,64	480	8 000625 904228

ELBOW Ø 25 mm F. 3/4" (20-27 mm) THREAD

90423

For connecting a threaded coupling or drainage valve to the end of the line.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90423		12	8,9 x 7,5 x 5,2	10 x 39 x 13	0,005	0,83	1440

8 000625 904235

T Ø 25 mm 3/4" (20-27 mm) THREAD

90418

For installation on main polyethylene tube after cutting and joining two tube sections.
With 3/4" (20-27 mm) female thread.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90418		6	16,5 x 8,3 x 6,2	10 x 39 x 13	0,005	0,75	720

8 000625 904181

ELBOW CONNECTOR Ø 25 mm F. 1/2" (15-21 mm) THREAD

90427

For installation on main polyethylene tube after cutting and joining two tube sections.
Used with 1/2" (15-21 mm) threaded extension.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90427		7	5,2 x 11,5 x 5,2	10 x 39 x 13	0,005	0,75	840

8 000625 904273

END-OF-LINE PLUG Ø 25 mm

90425

For closing off one end of the polyethylene tube.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90425		15	5,2 x 5,9 x 5,2	10 x 39 x 13	0,005	0,77	1800

8 000625 904259

Ø 20 mm - Ø 25 mm COUPLING

90428

To connect two polyethylene hoses of different diameters, Ø 20 and 25 mm.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet
90428		12	5,1 x 9,5 x 5,1	10 x 39 x 13	0,005	0,73	1440

8 000625 904280

Ø 25 mm WALL PLATE ELBOW

90429



Wall plate elbow to connect a 25 mm polyethylene hose and a tap with 3/4" M fitting, creating a new water intake connected to the system.
Attachment to wall with screws and plugs (not included).

90429		10	7,5 x 11 x 8,6	20 x 39 x 13	0,010	1,13	720

8 000625 904297

NEW FOR 2024

CONNECTOR Ø 32 mm F. 3/4" (20-27 mm) THREAD

90274

For connecting a polyethylene tube to a 3/4" (20-27 mm) threaded tap or solenoid valve with male 3/4" (20-27 mm) thread.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90274		10	6,2 x 7,7 x 6,2	10 x 39 x 13	0,005	0,90	1200	8 000625 902743

CONNECTOR Ø 32 mm F. 1" (26-34 mm) THREAD

90374

For connecting a polyethylene tube to a 1" (26-34 mm) male threaded water supply or the connectors to the solenoid valves (cod. 90813-90815).



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90374		12	6,2 x 8,15 x 6,2	20 x 39 x 13	0,010	1,16	864	8 000625 903740

COUPLING Ø 32 mm 1" (26-34 mm) THREAD

90271

For connecting a polyethylene tube to a female threaded water supply or solenoid valve (cod. 90812-90814).



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90271		20	6,2 x 8,2 x 6,2	20 x 39 x 13	0,010	1,70	1440	8 000625 902712

COUPLING Ø 32 mm

90275

For connecting two polyethylene tubes or repairing a punctured tube.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90275		12	6,2 x 12 x 6,2	20 x 39 x 13	0,010	1,70	864	8 000625 902750

ELBOW CONNECTOR Ø 32 mm

90270

For joining two polyethylene tubes at right angle.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90270		8	12 x 12 x 6,2	20 x 39 x 13	0,010	1,70	576	8 000625 902705

T Ø 32 mm CONNECTORS

90272

For connecting three polyethylene tubes to create a branch off.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90272		5	16,5 x 11 x 6,2	20 x 39 x 13	0,010	1,20	360	8 000625 902729

ELBOW Ø 32 mm F. 3/4" (20-27 mm) THREAD

90273

For connecting a threaded coupling or drainage valve to the end of the line.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90273		12	10,5 x 8,1 x 6,2	20 x 39 x 13	0,010	1,30	864

8 000625 902736

T Ø 32 mm 3/4" (20-27 mm) THREAD

90416

For installation on main polyethylene tube after cutting and joining two tube sections.
With 3/4" (20-27 mm) female thread.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90416		5	16,5 x 8,5 x 6,2	20 x 39 x 13	0,010	0,96	360

8 000625 904167

ELBOW CONNECTOR Ø 32 mm F. 3/4" (20-27 mm) THREAD

90426

For installation on main polyethylene tube after cutting and joining two tube sections.
Used with 3/4" (20-27 mm) threaded extension.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90426		8	11,5 x 6 x 6,2	20 x 39 x 13	0,010	1,36	576

8 000625 904266

END-OF-LINE PLUG Ø 32 mm

90277

For closing off one end of the polyethylene tube.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90277		12	6,2 x 6,4 x 6,2	10 x 39 x 13	0,005	0,94	1440

8 000625 902774

Ø 25 mm - Ø 32 mm COUPLING

90279

To connect two polyethylene hoses of different diameters, Ø 25 and 32 mm.



code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90279		12	6,2 x 11 x 6,2	20 x 39 x 13	0,010	1,43	864

8 000625 902798

A PROFESSIONAL RANGE

The quality and simplicity of Claber products are what make them the ideal solution for professionals too. Turbine sprinklers, solenoid valves, timers take underground irrigation anywhere.



24 V - 1" FEMALE SOLENOID VALVE

90938



Solenoid with silt filter. Reinforced structure to withstand mechanical and thermal stresses.
Operates with all types of multi-line timers at 24 V AC. With 1" female inlet and outlet thread.
Body in fibre glass reinforced nylon, stainless steel metal components. Low speed shut-off device to prevent pressure shock. Optional manual opening/shut-off control.
Operating pressure from 0,5 to 12 bar. Flow rate from 4,6 to 96 l/min.
Operating temperature range +5° to +70°.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90938		12		28 x 19 x 25	0,013	4,54	

8 000625 909384

24 V - 1" MALE SOLENOID VALVE

90939



Solenoid with silt filter. Reinforced structure to withstand mechanical and thermal stresses.
Operates with all types of multi-line timers at 24 V AC. With 1" male inlet and outlet thread. Body in fibre glass reinforced nylon, stainless steel metal components. Low speed shut-off device to prevent pressure shock. Optional manual opening/shut-off control. Operating pressure from 0,5 to 12 bar. Flow rate from 4,6 to 96 l/min. Operating temperature range +5° to +70°.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90939		12		28 x 19 x 25	0,013	4,36	

8 000625 909391

CONTROL UNIT

8188



From a field station, the unit will pilot the opening and closing movements of one or two 9V bistable solenoid valves installed in valve boxes.
Connected to a RAIN SENSOR (CODE 90915), the unit will suspend watering operations in the event of rainfall greater than 5 mm per square metre.
The control unit can be wall-mounted, using a special bracket, for ease of programming and practical maintenance.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8188		6		30 x 14 x 25	0,01	2,84	

8 000625 081882

FARM CONTROL UNIT

8191



This unit manages remote opening/closing of a 9V bistable solenoid valve located in a valve box.
A special bracket enables the wall-mounting of the control unit, for ease of programming and maintenance.
It is powered by a 9V battery.
Annual programming (365 days). Duration of irrigation: from 1 minute to 23 hours and 59 minutes, one irrigation cycle per day. Manual opening/closing function which can be modified, as can the irrigation time.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
8191		6		30 x 14 x 25	0,01	2,69	

8 000625 081912

1" F. PROGRAMMABLE SOLENOID VALVE

90928



Can be installed directly on the tap or water well outlet.
Protected by 100% sealed cover operates also in total submersion.
Easy to program with three keys only.
Irrigation time from 1 min to 23 h. 59 min.
With option of up to 6 irrigation cycles per day.
Manual and weekly programming with exclusion of specific weekdays as required.
Bistable 9 V solenoid with low power consumption.
Operates with a 9 V battery, sufficient for an entire season.
Electronic section separable from hydraulic section for easy programming or storage during winter.
Operating pressure from 0,5 to 12 bar.
1" female inlet and outlet thread.
Flow rate from 4,6 to 96 l/min. Operating temperature range +5° to +70°.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90928		6		30 x 16 x 25	0,012	4,42	

8 000625 909285

ADJUSTABLE POP-UP 0°-350° 6 L/MIN - 2"

90000



A professional-quality static pop-up sprinkler with an adjustable head from 0° to 350°, that guarantees even irrigation and minimal water consumption (6 l/min). It is equipped with a screw to adjust the jet with a hexagonal insert, stainless steel return spring, filter, self-lubricating clutch and non-spill rubber valve with an anti-freeze device. Height from ground 2" (5 cm).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90000		100		27 x 25 x 24	0,016	5,02		8 000625 900008

ADJUSTABLE POP-UP 0°-350° 10 L/MIN - 2"

90001



A professional-quality static pop-up sprinkler with an adjustable head from 0° to 350°, that guarantees even irrigation and minimal water consumption (10 l/min). It is equipped with a screw to adjust the jet with a hexagonal insert, stainless steel return spring, filter, self-lubricating clutch and non-spill rubber valve with an anti-freeze device. Height from ground 2" (5 cm).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90001		100		27 x 25 x 24	0,016	4,98		8 000625 900015

ADJUSTABLE POP-UP 0°-350° 6 L/MIN - 4"

90015



A professional-quality static pop-up sprinkler with an adjustable head from 0° to 350°, that guarantees even irrigation and minimal water consumption (6 l/min). It is equipped with a screw to adjust the jet with a hexagonal insert, stainless steel return spring, filter, self-lubricating clutch and non-spill rubber valve with an anti-freeze device. Ground height of 4" (10 cm).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90015		50		27 x 19 x 24	0,012	3,30		8 000625 900152

ADJUSTABLE POP-UP 0°-350° 10 L/MIN - 4"

90016



A professional-quality static pop-up sprinkler with an adjustable head from 0° to 350°, that guarantees even irrigation and minimal water consumption (10 l/min). It is equipped with a screw to adjust the jet with a hexagonal insert, stainless steel return spring, filter, self-lubricating clutch and non-spill rubber valve with an anti-freeze device. Ground height of 4" (10 cm).

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90016		50		27 x 19 x 24	0,012	3,30		8 000625 900169

SPRINKLER BODY

90142

90143

90144



90142 2" - 5 cm
90143 3" - 7,5 cm
90144 4" - 10 cm

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet	
90142		100		27 x 25 x 24	0,016	4,53		8 000625 901425
90143		50		27 x 16 x 24	0,010	2,70		8 000625 901432
90144		50		27 x 19 x 24	0,012	3,07		8 000625 901449

0°-350° ADJUSTABLE HEAD

90003 - 6 L/MIN



90145 - 10 L/MIN



Made of shock-resistant ABS plastic.
Filter with support provided.
Stainless steel jet range adjustment screw.
Compatible with other brand sprinklers.
Bag of 25 pcs.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90003		1 x 25		18,5 x 9,5 x 12,5	0,002	0,25	
90145		1 x 25		18,5 x 9,5 x 12,5	0,002	0,25	

LONG-JET TURBINE SPRINKLER

90154

Large jet turbine sprinkler with 9 interchangeable nozzles. Adjustable between 40° and 360° with continuous rotation. Adjustable jet with proportional reduction of the flow rate to ensure optimal uniformity of distribution and reduce consumption by up to 30%. Slits to remove any sand contained in the water. Pull-out internal filter. Silent thanks to internal lubrication. Protrudes 5" (12.5 cm) from earth. 3/4" (20-27 mm) F threaded base. Rubber cover to ensure a long product life by preventing any impurities from getting in. Provided with adjustment key. Packs of 20 pcs. Maximum watering area 670 m^2.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90154		20		34 x 20 x 34	0,023	7,09	



40°-360° BAR		l/min	r	
2	1	4,5	r 10,1 m	14,3 m
	1,5	5,7	r 11,0 m	15,5 m
	2	6,8	r 10,7 m	15,1 m
	2,5	9,5	r 11,3 m	15,9 m
	3	11,4	r 11,0 m	15,5 m
	4	15,1	r 11,3 m	15,9 m
	5	18,2	r 11,3 m	15,9 m
	6	22,7	r 12,2 m	17,2 m
	8	29,9	r 11,6 m	16,4 m

40°-360° BAR		l/min	r	
3	1	5,1	r 10,1 m	14,2 m
	1,5	7,0	r 11,3 m	15,9 m
	2	8,7	r 10,7 m	15,1 m
	2,5	11,8	r 11,6 m	16,4 m
	3	13,5	r 11,3 m	15,9 m
	4	17,8	r 11,9 m	16,8 m
	5	22,2	r 11,6 m	16,4 m
	6	26,2	r 12,5 m	17,6 m
	8	35,9	r 13,4 m	18,9 m

40°-360° BAR		l/min	r	
4	1	6,8	r 10,1 m	14,2 m
	1,5	8,3	r 11,6 m	16,4 m
	2	11,0	r 11,6 m	16,4 m
	2,5	14,4	r 12,2 m	17,2 m
	3	16,7	r 12,5 m	17,6 m
	4	21,2	r 12,2 m	17,2 m
	5	27,3	r 13,1 m	18,5 m
	6	31,8	r 13,4 m	18,9 m
	8	42,0	r 14,0 m	19,8 m

MEDIUM-JET TURBINE SPRINKLER

90152

Medium-jet turbine sprinklers with interchangeable nozzles.
A working range that can be adjusted from 40° to 360°, with just a simple cross-head screwdriver, a pointer on the lid showing the selected work arc.
The sprinkler can be regulated before installation, after installation in a static position, or during operation.
A special mechanism avoids damage to the gears during regulation. Internal removable filter.
Running pressure from 1.5 to 4 bars. Radius from 4 to 9 m. 1/2" screw base.
Height from ground 4" (10 cm).
Packs of 25 pcs.
Irrigated area max 254 m^2.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)	pcs/pallet
90152		25		28 x 19 x 25	0,013	3,93	



40°-360° BAR		l/min	r	
1	0,75	2,7	r 4,8 m	6,8 m
	1	4,4	r 5,8 m	8,2 m
	1,5	4,5	r 6,7 m	9,5 m
	2	6,0	r 7,2 m	10,2 m
	3	9,4	r 8,0 m	11,3 m

40°-360° BAR		l/min	r	
2	0,75	2,8	r 5,0 m	7,1 m
	1	4,8	r 5,9 m	8,3 m
	1,5	5,1	r 6,9 m	9,8 m
	2	6,6	r 7,5 m	10,6 m
	3	10,0	r 8,4 m	11,9 m

40°-360° BAR		l/min	r	
3	0,75	3,1	r 5,2 m	7,4 m
	1	5,8	r 6,3 m	8,9 m
	1,5	6,7	r 7,2 m	10,2 m
	2	8,3	r 8,1 m	11,5 m
	3	11,8	r 9,0 m	12,7 m

MERCHANDISING

With Claber, it is easy to turn any shop into a specialist irrigation centre.
Claber enlarges its range of display boxes with the the new targeted display solutions for Claber water timers as well as for drip irrigation kits and the new Happy Fresh cooling systems.



MULTI BOX

9447



Multi Box is the most versatile and immediate solution for "out of gondola unit" display use. Made of tough 70% recycled cardboard, contained in a compact package, very easy to assemble, it is made up of a base and three shelves, to display Claber products and dispenser.

Measurements of assembled stand:
55 x 40 x 140 cm

code	packaging	qty	pack size (cm)
9447		1	40 x 100 x 9

box size (cm)	volume (m^3)	weight (kg)
40 x 100 x 9	0,036	4,80

VISUAL BOX

9449



The new Visual Box tall stand is made of 70% recycled cardboard. It has three large drawers in transparent PVC, each one divided into two compartments, to double your options when it comes to displaying Claber products effectively: from connectors to couplings, and spray nozzles to pistols and sprinklers.
The stand is pre-assembled and ready to use right away.

Measurements of assembled stand:
40 x 39 x 150 cm

code	packaging	qty	pack size (cm)
9449		1	40 x 39 x 120

box size (cm)	volume (m^3)	weight (kg)
40 x 39 x 120	0,190	5,40

ESPO PROMO MONOFACE

9454



70% recycled cardboard stand specifically for off-shelf promotion of blister pack products, even small ones.
High visibility of product.
Hook positioning flexible and customizable.
Equipped with 30 hooks and a removable shelf 25 cm from the base.
Easy to assemble.
Small pack size.

Measurements of assembled stand:
57 x 38 x 184 cm

code	packaging	qty	pack size (cm)
9454		1	59 x 39 x 98

box size (cm)	volume (m^3)	weight (kg)
59 x 39 x 98	0,225	7,00

ESPO AQUAUNO

9548



This is a specific "off-gondola" stand for displaying the water timers of the Aquauno, Aquauno Plus and Aquadue Duplo Evolution range.
Supplied empty and unassembled in a compact package, Espo Aquauno is very easy to put up and ready to use immediately. Fully made of 70% recycled cardboard, it is provided with two interchangeable crowners: one for the new Aquauno Mist (8496) timer, the other a general one for Claber tap timers.

Three different filling options:
• Aquauno timers: 30 pcs (3 x 10 pcs)
• Aquauno Plus timers: 24 pcs (3 x 8 pcs)
• Aquadue Duplo timer: 24 pcs (3 x 8 pcs)

Measurements of assembled stand: 32 x 38,5 x 133 cm

code	packaging	qty	pack size (cm)
9548		1	87 x 76 x 5

box size (cm)	volume (m^3)	weight (kg)
87 x 76 x 5	0,030	3,80

ESPO KIT

9549



One "off-gondola" stand suitable for displaying Claber drip irrigation kits, Aqua- Magic Systems and the new Happy Fresh cooling system kits.
Supplied empty and unassembled in a compact package, Espo Kit is very easy to put up and ready to use immediately. Fully made of 70% recycled cardboard, it is provided with three interchangeable crowners: one for the drip irrigation kits, one for the Aqua-Magic System, and the other for the kits in the Happy Fresh range.

Different filling options:
• 8063: 10 pcs (2 x 5 pcs)
• 90751: 16 pcs (2 x 8 pcs)
• 90752: 10 pcs (2 x 5 pcs)
• 90753: 10 pcs (2 x 5 pcs)
• 90763: 10 pcs (2 x 5 pcs)
• 90766: 10 pcs (2 x 5 pcs)
• 90759: 10 pcs (2 x 5 pcs)
• 90764: 16 pcs (2 x 8 pcs)

Measurements of assembled stand: 32 x 38,5 x 133 cm

code	packaging	qty	pack size (cm)
9549		1	87 x 76 x 5

box size (cm)	volume (m^3)	weight (kg)
87 x 76 x 5	0,030	3,60

DISPLAY BOX (3 PCS.)

8849



Claber's new display unit-dispensers for loose products allow a tidy, linear presentation of store shelf and rack references.

Stand measurements: 37 x 20 x 35 cm

code	packaging	qty	pack size (cm)	box size (cm)	volume (m^3)	weight (kg)
8849		1	60 x 55 x 2,5	60 x 55 x 2,5	0,008	1,50

CLABER GUIDE
PUB1094850000



LEAFLET DISPLAY BOX
PUB1094110000



SHOPPER
PUB1091060000





SALES POINTS: THE CLABER AISLE NEVER GOES UNNOTICED



In stores, on the aisles devoted to gardening, Claber products catch the attention and are easy to recognise at a glance.
Pleasing colours and graphics full of impact distinguish between the three ranges dedicated to drip, above-ground and underground irrigation. The arrangement of the products and the design of the packaging direct the consumer to choose the correct product and help create a system that's a perfect size for their requirements.
An additional bonus that starts in store is a space that's beautiful to look at and easy to manage.

ABOVE-GROUND IRRIGATION



DRIP IRRIGATION




UNDERGROUND IRRIGATION



ABOVE-GROUND, DRIP, UNDERGROUND, CLABER PANELS

Dimensions: 100x40 cm

PUB1090940000
ABOVE-GROUND INFORMATIVE PANEL

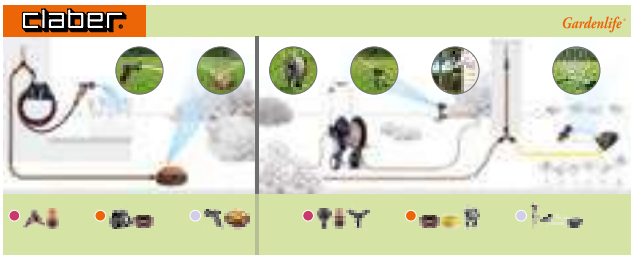

PUB1092020000
ABOVE-GROUND PANEL




PUB1092000000
DRIP INFORMATIVE PANEL



PUB1092030000
DRIP PANEL



PUB1092010000
UNDERGROUND INFORMATIVE PANEL

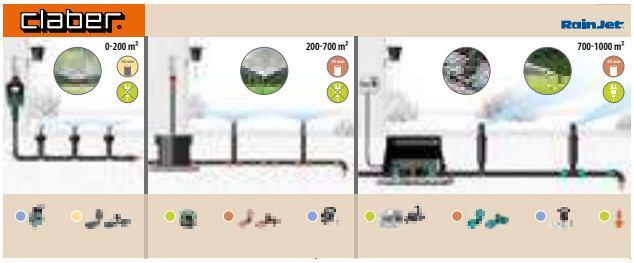

PUB1092040000
UNDERGROUND PANEL



PUB1095470000
CLABER PANEL

Code	Description	Page	Qty
8022	AQUA-HOME 4-6-8	**139**	1
8052	IDRIS SPIKE	**125**	12
8054	OASIS EVOLUTION	**126**	1
8058	MULTIPLA AC 230/24 V LCD	**138**	1
8059	SPARE DRIPPERS	**126**	10
8060	MULTIPLA DC 9 V LCD	**138**	1
8061	AQUA-MAGIC TANK	**123**	1
8062	AQUALUX SYSTEM	**127**	1
8063	AQUA-MAGIC SYSTEM	**123**	1
8064	SPARE DRIPPERS	**123**	10
8068	10 m HOSE 1/4" (4-6 mm)	**123**	4
8410	AQUADUE DUPLO EVOLUTION	**89**	2
8412	AQUAUNO VIDEO-2 PLUS	**88**	2
8413	AQUAUNO VIDEO-6 PLUS	**88**	2
8419	AQUAUNO LOGICA PLUS	**88**	2
8422	AQUAUNO LOGICA	**86**	2
8423	AQUAUNO SELECT	**87**	2
8425	AQUAUNO PRATICO	**86**	2
8428	AQUAUNO VIDEO-2	**87**	2
8480	RF RAIN SENSOR INTERFACE	**91**	2
8483	TEMPO LOGIC	**90**	2
8485	DUAL LOGIC	**91**	2
8486	TEMPO SELECT	**90**	2
8487	TEMPO HYBRID	**90**	2
8488	DUAL SELECT	**91**	2
8496	AQUAUNO MIST	**67/87**	2
8497	TEMPO MYAQUASOLAR NEW	**93**	2
8498	DUAL MYAQUASOLAR NEW	**93**	2
8509	1" F (26-34 mm) - 3/4" M (20-27 mm) ADAPTER	**15**	12
8525	SMOOTH TAP CONNECTOR	**17**	10
8534	PRO SPRAY NOZZLE	**29**	15
8535	PRO SPRAY NOZZLE	**29**	5
8536	PLUS SPRAY NOZZLE	**29**	15
8537	PLUS SPRAY NOZZLE	**29**	5
8538	ERGO SPRAY PISTOL	**26**	15
8539	ERGO SPRAY PISTOL	**26**	10
8541	ERGO SHOWER PISTOL	**27**	4
8542	COUPLING 1/2"-5/8"	**23**	50
8543	COUPLING 1/2"-5/8"	**23**	12
8544	COUPLING 1/2"-5/8" W/AQUASTOP	**23**	25
8545	COUPLING 1/2"-5/8" W/AQUASTOP	**23**	12
8546	UNIVERSAL COUPLING 1/2"-5/8"-3/4"	**23**	40
8547	UNIVERSAL COUPLING 1/2"-5/8"-3/4"	**23**	10
8548	UNIVERSAL COUPLING 1/2"-5/8"-3/4" W/AQUASTOP	**23**	20
8549	UNIVERSAL COUPLING 1/2"-5/8"-3/4" W/AQUASTOP	**23**	10
8551	STARTER SET 1/2"	**26**	6
8556	TAP CONNECTOR 1/2" (15-21 mm) - 3/4" (20-27 mm)	**22**	50
8557	TAP CONNECTOR 1/2" (15-21 mm) - 3/4" (20-27 mm)	**22**	12
8558	TAP CONNECTOR 3/4" (20-27 mm) - 1" (26-34 mm)	**22**	40
8559	TAP CONNECTOR 3/4" (20-27 mm) - 1" (26-34 mm)	**22**	10
8560	MENDER 1/2"	**22**	30
8561	MENDER 1/2"	**22**	12
8562	MENDER 5/8" HOSE	**18**	30
8563	MENDER 5/8" HOSE	**18**	10
8564	UNIVERSAL MENDER 1/2"-5/8"-3/4"	**22**	40
8565	UNIVERSAL MENDER 1/2"-5/8"-3/4"	**22**	10
8566	5/8" AUTOMATIC COUPLING W / AQUASTOP	**21**	50
8567	5/8" AUTOMATIC COUPLING W / AQUASTOP	**21**	12
8568	5/8" AUTOMATIC COUPLING	**20**	50
8569	5/8" AUTOMATIC COUPLING	**20**	12
8580	4 OUTLETS DISTRIBUTOR	**15**	8
8581	4 OUTLETS DISTRIBUTOR	**15**	5
8583	KOALA QUICK-CLICK	**17**	8
8587	3/4" (20-27 mm) QUICK-FIT TAP CONNECTOR	**17**	10
8589	3/4" (20-27 mm) MALE THREADED TWO-WAY ADAPTER	**15**	5
8590	3/4" (20-27 mm) MALE THREADED TWO-WAY ADAPTER	**15**	8
8591	MULTI THREADED TAP CONNECTOR 1/2" (15-21 mm) - 3/4" (20-27 mm)	**14**	100
8592	1"-3/4" ANGLED TAP CONNECTOR	**17**	8
8595	MULTI THREADED TAP CONNECTOR 1" (26-34 mm) - 3/4" (20-27 mm)	**15**	40
8597	3/4" (20-27 mm) TAP CONNECTOR METAL	**17**	14
8598	DOUBLE TAP CONNECTOR	**15**	25
8599	DOUBLE TAP CONNECTOR	**15**	8
8601	COUPLING WITH SHUT-OFF VALVE	**20**	8
8602	1/2" AUTOMATIC COUPLING W / AQUASTOP	**21**	50
8603	1/2" AUTOMATIC COUPLING W / AQUASTOP	**21**	14
8604	3/4" AUTOMATIC COUPLING W / AQUASTOP	**21**	50
8605	3/4" AUTOMATIC COUPLING W / AQUASTOP	**21**	12
8606	1/2" AUTOMATIC COUPLING	**20**	50
8607	1/2" AUTOMATIC COUPLING	**20**	14
8608	3/4" AUTOMATIC COUPLING	**20**	50
8609	3/4" AUTOMATIC COUPLING	**20**	12
8611	CONNECTOR WITH SHUT-OFF VALVE	**19**	8
8612	TWO-WAY CONNECTOR	**19**	100
8613	TWO-WAY CONNECTOR	**19**	14
8614	THREE-WAY CONNECTOR	**19**	40
8615	THREE-WAY CONNECTOR	**19**	12
8616	JET SPRAY NOZZLE	**29**	50
8617	JET SPRAY NOZZLE	**29**	8
8618	MENDER 1/2" HOSE	**18**	50
8619	MENDER 1/2" HOSE	**18**	14
8620	MENDER 3/4" HOSE	**18**	50
8621	MENDER 3/4" HOSE	**18**	10
8622	1/2" (15-21mm) THREADED TAP CONNECTOR	**14**	50
8623	1/2" (15-21mm) THREADED TAP CONNECTOR	**14**	14
8626	3/4" (20-27 mm) THREADED TAP CONNECTOR	**14**	100
8627	3/4" (20-27 mm) THREADED TAP CONNECTOR	**14**	14
8628	1" (26-34 mm) THREADED TAP CONNECTOR	**14**	100
8629	1" (26-34 mm) THREADED TAP CONNECTOR	**14**	12
8636	SPRINKLER CONNECTOR 3/4" M.	**19**	50
8637	SPRINKLER CONNECTOR 3/4" M.	**19**	14
8654	MULTIFUNCTION SPRINKLER	**44**	3
8656	ROLLINA	**44**	5

Code	Description	Page	Qty
8658	TURBOSPRUZZO	**44**	6
8660	TURBOSPIKE	**44**	12
8661	SPIKE-JET	**46**	5
8662	VARIO-JET	**46**	5
8663	SPRAY-JET	**46**	5
8675	IDROSPRAY 2000	**45**	2
8685	AQUALUX 2000	**45**	4
8690	ROTOROLL EVOLUTION FLOOR STAND	**61**	1
8692	ROTOROLL EVOLUTION 10 m	**61**	1
8694	IDROJET 2000	**45**	4
8696	ROTOROLL EVOLUTION 20 m	**61**	1
8697	ROTOROLL EVOLUTION 30 m	**61**	1
8705	3/4" (20-27 mm) IMPACT FEMALE HEAD	**46**	5
8707	IMPACT ON STAKE	**47**	5
8708	IMPACT PLASTIC SPIKE	**47**	5
8709	IMPACT TRIPOD	**47**	4
8711	WALL BRACKETS	**51**	10
8713	BAG CLAMPS	**64**	10
8715	IMPACT TRIPOD KIT	**47**	2
8740	COMPACT-160 PROMO	**43**	4
8743	COMPACT-16 SUPER METAL	**43**	3
8748	COMPACT-12	**43**	3
8753	COMPACT-20 AQUA CONTROL	**43**	3
8756	SPRAY PISTOL	**26**	5
8757	WASHING PISTOL	**65**	12
8774	WIPPY CAR	**65**	4
8800	NOZZLE AND COUPLING SET	**29**	10
8802	STARTER SET Ø 1/2"	**29**	8
8803	MULTI THREADED TAP CONNECTOR 1" (26-34 mm) - 3/4" (20-27 mm)	**15**	12
8804	MULTI THREADED TAP CONNECTOR 1/2" (15-21 mm) - 3/4" (20-27 mm)	**14**	14
8811	O-RING AND WASHER SET	**19**	15
8813	TAP CONNECTOR AND 1/2" COUPLING SET	**21**	10
8818	1/2" HOSE CONNECTION SET	**21**	8
8827	STARTER SET Ø 3/4"	**29**	8
8843	WIPPY AUTO	**65**	2
8845	1/2" (12,5 mm) SILVER ELEGANT PLUS HOSE KIT 15 m	**72**	1
8849	DISPLAY BOX (3 PCS.)	**177**	1
8856	5/8" (15 mm) SILVER ELEGANT PLUS HOSE KIT 15 m	**72**	1
8858	GENIUS COMPACT PRONTO 25	**57**	12
8862	GENIUS 60	**55**	1
8864	KIT PRONTO 30	**55**	1
8865	METAL JUNIOR PRONTO AQUAVIVA 25	**57**	12
8866	ECO 0	**50**	8
8872	GENIUS 100	**55**	1
8884	AQUAPONY KIT	**51**	1
8887	AQUAPONY	**51**	1
8890	METAL 40	**58**	1
8891	METAL 60	**58**	1
8894	METAL GEMINI	**59**	1
8895	METAL PROFY	**59**	1
8900	JUMBO	**59**	1

Code	Description	Page	Qty
8904	SET OF 10 CLABER BAGS	**64**	10
8917	FAN SPRAY	**27**	4
8921	KIROS	**51**	1
8922	LONG FAN SPRAY	**27**	2
8933	QUBO PRONTO AQUAVIVA 20	**56**	8
8934	CARRY CART ECO	**64**	1
8945	KIROS KIT	**51**	1
8956	MALIBÙ	**65**	3
8962	EXTENSION	**53**	12
8966	SPRAY PISTOL	**26**	16
8974	SET AQUAPASS	**51**	1
8977	SILVER-AL	**53**	1
8980	ECOSEI	**52**	1
8981	ECOSEI KIT	**52**	1
8985	GENIUS COMPACT PRONTO AQUAVIVA 20	**57**	12
9003	AQUAVIVA PLUS Ø 1/2" (12,5 mm) m 15	**73**	1
9004	AQUAVIVA PLUS Ø 1/2" (12,5 mm) m 25	**73**	1
9005	AQUAVIVA PLUS Ø 5/8" (15 mm) m 15	**73**	1
9006	AQUAVIVA PLUS Ø 5/8" (15 mm) m 25	**73**	1
9008	AQUAVIVA PLUS Ø 3/4" (19 mm) m 25	**73**	1
9025	9 - 13 mm COUPLING	**20/81**	10
9026	9 - 13 mm COUPLING W / AQUASTOP	**21/81**	10
9028	MINI-SET UTILITY	**50**	1
9031	MINI-SET BALCONY	**50**	1
9034	SPIRAL KIT BASIC 10 m	**81**	6
9036	TOP-BLACK Ø 1/2" (12,5 mm) m 50	**69**	1
9037	TOP-BLACK Ø 1/2" (12,5 mm) m 15	**69**	1
9040	TOP-BLACK Ø 5/8" (15 mm) m 15	**69**	1
9043	TOP-BLACK Ø 5/8" (15 mm) m 50	**69**	1
9045	TOP-BLACK Ø 3/4" (19 mm) m 50	**69**	1
9048	TOP-BLACK Ø 3/4" (19 mm) m 25	**69**	1
9053	STARTER GARDEN-SET	**81**	1
9064	TOP-BLACK Ø 1/2" (12,5 mm) m 25	**69**	1
9065	TOP-BLACK Ø 5/8" (15 mm) m 25	**69**	1
9081	ELEGANT DUAL JET PISTOL	**28**	4
9083	ELEGANT MULTIFUNCTION PISTOL	**28**	4
9086	ELEGANT TELESCOPIC MULTIFUNCTION LANCE	**28**	2
9088	ELEGANT MULTIFUNCTION PISTOL 5 JETS	**28**	4
9089	ELEGANT MULTIFUNCTION NOZZLE 5 JETS	**28**	6
9120	AQUAVIVA PLUS Ø 1/2" (12,5 mm) m 10	**73**	1
9123	SILVER ELEGANT PLUS Ø 1/2" (12,5 mm) m 15	**71**	1
9124	SILVER ELEGANT PLUS Ø 1/2" (12,5 mm) m 25	**71**	1
9125	SILVER ELEGANT PLUS Ø 5/8" (15 mm) m 15	**71**	1
9126	SILVER ELEGANT PLUS Ø 5/8" (15 mm) m 25	**71**	1
9127	SILVER ELEGANT PLUS Ø 5/8" (15 mm) m 50	**71**	1
9128	SILVER ELEGANT PLUS Ø 3/4" (19 mm) m 25	**71**	1
9129	SILVER ELEGANT PLUS Ø 3/4" (19 mm) m 50	**71**	1
9131	FLEXYFORT GREEN Ø 1/2" (12,5 mm) m 15	**70**	1
9133	FLEXYFORT GREEN Ø 1/2" (12,5 mm) m 50	**70**	1
9136	FLEXYFORT GREEN Ø 5/8" (15 mm) m 50	**70**	1
9138	FLEXYFORT GREEN Ø 3/4" (19 mm) m 50	**70**	1

Code	Description	Page	Qty
9140	FLEXYFORT GREEN Ø 1" (25 mm) m 50	70	1
9141	FLEXYFORT GREEN Ø 1/2" (12,5 mm) m 25	70	1
9142	FLEXYFORT GREEN Ø 5/8" (15 mm) m 15	70	1
9145	FLEXYFORT GREEN Ø 5/8" (15 mm) m 25	70	1
9149	FLEXYFORT GREEN Ø 3/4" (19 mm) m 25	70	1
9336	TWIDDY 15 m NEW	77	6
9337	TWIDDY 25 m NEW	77	4
9338	SPIRAL KIT PLUS 15 m	81	3
9340	TOP-LIGHT Ø 1/2" 10 m	79	1
9341	TOP-LIGHT Ø 1/2" 15 m	79	1
9342	TOP-LIGHT Ø 1/2" 25 m	79	1
9357	TOP-LIGHT Ø 3/4" 15 m	79	1
9358	TOP-LIGHT Ø 3/4" 25 m	79	1
9373	GARDEN SPRAY PISTOL	27	5
9391	ERGO-GARDEN SPRAY PISTOL	27	8
9447	MULTI BOX	175	1
9449	VISUAL BOX	175	1
9454	ESPO PROMO MONOFACE	175	1
9548	ESPO AQUAUNO	176	1
9549	ESPO KIT	176	1
9561	PRECISION CONFORT	25	3
9563	MULTI - JET CONFORT	25	3
9565	BALCONY CONFORT	25	3
9567	METAL - JET CONFORT	25	3
9601	3/4" M (20-27 mm) THREADED ADJUSTABLE TWO-WAY ADAPTER	37	4
9602	ADJUSTABLE TWO-WAY TAP CONNECTOR	37	4
9603	1" (26-34 mm) TAP CONNECTOR WITH 3/4" (20-27 mm) ADAPTER	37	10
9604	3/4" (20-27 mm) TAP CONNECTOR	37	10
9605	1/2" (15 - 21 mm) TAP CONNECTOR	37	10
9606	TWO-WAY CONNECTOR	38	10
9607	THREE-WAY CONNECTOR	38	8
9608	1/2" M (15 - 21 mm) CONNECTOR	38	10
9609	3/4" M (20 - 27 mm) CONNECTOR	38	10
9610	1/2"-5/8" AUTOMATIC COUPLING	39	8
9611	1/2"-5/8" AUTOMATIC COUPLING W/STOP	39	8
9612	1/2"-5/8" MENDER	39	8
9613	3/4" AUTOMATIC COUPLING	39	8
9614	3/4" AUTOMATIC COUPLING W/STOP	39	8
9615	3/4" MENDER	39	8
9618	BASIC METAL MULTIFUNCTION PISTOL NEW	40	4
9619	BASIC METAL PISTOL	40	5
9620	SPRAY NOZZLE WITH ADJUSTABLE JET	40	8
9621	SPRAY PISTOL	40	4
9622	8 PATTERNS MULTIFUNCTION PISTOL	40	4
9623	IMPACT METAL-JET SPIKE	41	3
9624	1/2" METAL OUTDOOR TAP NEW	36	5
9625	1/2" METAL OUTDOOR TAP WITH DOUBLE OUTLET NEW	36	5
9626	METAL-JET TELESCOPIC MULTIFUNCTION LANCE NEW	41	2
9641	1" - 3/4" MAX-FLOW TAP CONNECTOR	31	8
9642	3/4" M THREADED MAX-FLOW ADAPTOR	31	10
9643	2-WAY MAX-FLOW CONNECTOR	32	10
9644	2-WAY CONNECTOR MAX-FLOW TO STANDARD	32	10
9645	3-WAY MAX-FLOW CONNECTOR	32	10
9646	3-WAY CONNECTOR MAX-FLOW TO STANDARD	32	10
9647	3/4" MAX-FLOW COUPLING	33	8
9648	3/4" MAX-FLOW MENDER	33	8
9649	3/4" - 1" MAX-FLOW MENDER	33	6
9650	1" MAX-FLOW COUPLING	33	6
9651	1" MAX-FLOW MENDER	33	6
9652	MAX-FLOW ADJUSTABLE NOZZLE	34	6
9654	1" M THREADED MAX-FLOW ADAPTOR	31	10
9655	1"1/4 - 1" MAX-FLOW TAP CONNECTOR	31	6
9656	MAX-FLOW STARTER KIT 3/4" (19 mm) NEW	34	5
9657	MAX-FLOW O-RING AND WASHERS SET	32	10
9658	MASTER PRO NOZZLE NEW	35	3
90004	0° - 350° - 2" ADJUSTABLE POP-UP (5 cm)	147	24
90005	0° - 350° - 3" ADJUSTABLE POP-UP (7,5 cm)	147	24
90006	0° - 350° - 4" ADJUSTABLE POP-UP (10 cm)	147	24
90007	0° - 350° ADJUSTABLE HEAD	147	12
90019	ADJUSTABLE POP-UP 0° - 350° 6 L/MIN - 4" (10 cm)	147	24
90020	ADJUSTABLE POP-UP 0° - 350° 6 L/MIN - 2" (5 cm)	147	24
90041	360° JET POP-UP - 2" (5 cm)	148	12
90043	360° JET POP-UP - 4" (10 cm)	148	12
90044	360° HEAD	148	12
90053	180° JET POP-UP - 2" (5 cm)	148	12
90055	180° JET POP-UP - 4" (10 cm)	148	12
90056	180° HEAD	148	12
90095	90° JET POP-UP - 2" (5 cm)	149	12
90097	90° JET POP-UP - 4" (10 cm)	149	12
90098	90° HEAD	149	12
90109	CENTRE-STRIP POP-UP - 4" (10 cm)	150	12
90110	CENTRE-STRIP HEAD	150	12
90121	END-STRIP POP-UP - 4" (10 cm)	151	12
90122	END-STRIP HEAD	151	12
90123	SET OF SPARE POP-UP AND COLIBRÌ FILTERS	151	12
90124	SET OF POP-UP SPARE PARTS	151	12
90133	SQUARE AREA POP-UP- 4" (10 cm)	150	12
90134	SQUARE AREA HEAD	150	12
90200	COLIBRÌ STARTER KIT	136	1
90210	360° COLIBRI MICRO-SPRINKLER	135	12
90220	180° COLIBRI MICRO-SPRINKLER	135	12
90230	90° COLIBRI MICRO-SPRINKLER	135	12
90250	GUARD COLLAR	135	10
90264	TURBO-JET 80°-360° - 3"	137	12
90266	TURBO-JET 80°-360° - 4"	137	12
90270	ELBOW CONNECTOR Ø 32 mm	168	8
90271	COUPLING Ø 32 mm 1" (26-34 mm) THREAD	168	20
90272	T Ø 32 mm CONNECTORS	168	5
90273	ELBOW Ø 32 mm F. 3/4" (20-27 mm) THREAD	169	12
90274	CONNECTOR Ø 32 mm F. 3/4" (20-27 mm) THREAD	168	10
90275	COUPLING Ø 32 mm	168	12
90276	BRACKET COUPLING FOR Ø 32 mm HOSE	161	7×2

Code	Description	Page	Qty
90277	END-OF-LINE PLUG Ø 32 mm	**169**	12
90279	Ø 25 mm - Ø 32 mm COUPLING	**169**	12
90318	1" (26-34 mm) M. THREADED CONNECTOR Ø 20 mm	**164**	20
90319	1" (26-34 mm) F. THREADED CONNECTOR Ø 20 mm	**164**	20
90320	F. 3/4" (20-27 mm) - 1/2" THREADED CONNECTOR (15-21 mm) Ø 20 mm	**164**	20
90321	COUPLING Ø 20 mm	**164**	15
90322	ELBOW CONNECTOR Ø 20 mm	**164**	15
90323	T Ø 20 mm	**164**	10
90324	1/2" (15-21 mm) M. THREADED ELBOW Ø 20 mm	**165**	20
90325	1/2" (15-21 mm) M. THREADED T CONNECTOR Ø 20 mm	**165**	15
90326	3/4" (20-27 mm) F. THREADED ELBOW Ø 20 mm	**165**	20
90327	END-OF-LINE PLUG Ø 20 mm	**165**	20
90328	Ø 16 mm - Ø 20 mm COUPLING	**165**	20
90329	Ø 20 mm WALL PLATE ELBOW NEW	**165**	10
90350	1/2" SOAKER HOSE 15 m	**100**	1
90351	1/2" SOAKER HOSE 25 m	**100**	1
90353	1/4" DRIPPER TUBE 15 m	**98**	5
90354	2,1 L/H SELF-REGULATING DRIPPER TUBE 25 m	**98**	1
90355	DRIPPER TUBE 25 m	**98**	1
90356	DRIPPER TUBE 25 m BROWN	**98**	1
90357	DRIPPER TUBE 50 m	**98**	1
90362	MAIN TUBE 15 m	**97**	1
90365	MAIN TUBE 25 m	**97**	1
90366	MAIN TUBE 50 m	**97**	1
90368	MAIN TUBE 25 m WHITE	**97**	1
90370	FEEDING TUBE 20 m	**96**	5
90371	FEEDING TUBE 5 m	**96**	14
90372	PE TUBE Ø 20 mm 15 m	**163**	1
90373	PE TUBE Ø 20 mm 25 m	**163**	1
90374	CONNECTOR Ø 32 mm F. 1" (26-34 mm) THREAD	**168**	12
90375	FEEDING TUBE 20 m GREEN	**96**	5
90376	TRIPLY 7,5 m	**101**	3
90377	TRIPLY 15 m	**101**	3
90380	PE TUBE Ø 25 mm 25 m	**163**	1
90385	PE TUBE Ø 25 mm 50 m	**163**	1
90390	PE TUBE Ø 32 mm 25 m	**163**	1
90395	PE TUBE Ø 32 mm 50 m	**163**	1
90416	T Ø 32 mm 3/4" (20-27 mm) THREAD	**169**	5
90417	ELBOW CONNECTOR Ø 25 mm	**166**	7
90418	T Ø 25 mm 3/4" (20-27 mm) THREAD	**167**	6
90419	COUPLING Ø 25 mm	**166**	9
90420	COUPLING Ø 25 mm 1" (26-34 mm) THREAD	**166**	15
90421	COUPLING Ø 25 mm 3/4" (20-27 mm) THREAD	**166**	15
90422	T Ø 25 mm CONNECTORS	**166**	4
90423	ELBOW Ø 25 mm F. 3/4" (20-27 mm) THREAD	**167**	12
90424	CONNECTOR Ø 25 mm - F. 3/4" (20-27 mm) THREAD	**166**	15
90425	END-OF-LINE PLUG Ø 25 mm	**167**	15
90426	ELBOW CONNECTOR Ø 32 mm F. 3/4" (20-27 mm) THREAD	**169**	8
90427	ELBOW CONNECTOR Ø 25 mm F. 1/2" (15-21 mm) THREAD	**167**	7
90428	Ø 20 mm - Ø 25 mm COUPLING	**167**	12
90429	Ø 25 mm WALL PLATE ELBOW NEW	**167**	10

Code	Description	Page	Qty
90450	BRACKET COUPLING FOR Ø 25 mm HOSE	**161**	8×2
90474	MEDIUM-JET TURBINE SPRINKLER	**153**	12
90478	LONG-JET TURBINE SPRINKLER	**153**	8
90480	MULTI-JET TURBINE WITH LONG JET RANGE	**153**	8
90500	CIRCULAR VALVE BOX	**162**	1
90510	RECTANGULAR VALVE BOX	**162**	1
90515	RECTANGULAR VALVE BOX	**162**	1
90520	HYDRANT VALVE BOX NEW	**162**	3
90524	CONNECTOR Ø 25 mm - F. 1" (26-34 mm) THREAD	**166**	10
90701	1" M (26-34 mm) x 3/4" M (20-27 mm) NIPPLE	**159**	40
90702	3/4" M (20-27 mm) x 3/4" M (20-27 mm) NIPPLE	**159**	40
90703	3/4" M (20-27 mm) x 1/2" M (15-21 mm) NIPPLE	**159**	40
90704	3/4" F (20-27 mm) x 1/2" F (15-21 mm) COUPLING	**158**	40
90705	1" F (26-34 mm) x 3/4" F (20-27 mm) COUPLING	**158**	20
90706	3/4" F (20-27 mm) x 3/4" F (20-27 mm) COUPLING	**158**	40
90707	1/2" F (15-21 mm) x 1/2" F (15-21 mm) COUPLING	**158**	40
90708	1" F (26-34 mm) x 1" F (26-34 mm) COUPLING	**158**	20
90709	3/4" F (20-27 mm) x 3/4" F (20-27 mm) ELBOW	**158**	20
90710	1" F (26-34 mm) x 1" F (26-34 mm) ELBOW	**158**	20
90711	1" F (26-34 mm) T CONNECTOR	**158**	20
90712	3/4" F (20-27 mm) T CONNECTOR	**158**	20
90713	3/4" (20-27 mm) M THREADED CAP	**159**	40
90714	1/2" (15-21 mm) M THREADED CAP	**159**	20
90715	1" (26-34 mm) M THREADED CAP	**159**	40
90720	Ø 1/2" (15-21 mm) - 1/2" (15-21 mm) THREADED EXTENSION NEW	**160**	50
90721	Ø 3/4" (20-27 mm) - 1/2" (15-21 mm) THREADED EXTENSION NEW	**160**	50
90722	Ø 3/4" (20-27 mm) - 3/4" (20-27 mm) THREADED EXTENSION NEW	**160**	50
90746	FLEXIBLE EXTENSION Ø 3/4" (20-27 mm) - 1/2" (15-21 mm)	**160**	8
90747	FLEXIBLE EXTENSION Ø 3/4" (20-27 mm) - 3/4" (20-27 mm)	**160**	8
90751	HAPPY FRESH EVOLUTION KIT 7,5 M	**67**	4
90752	HAPPY FRESH EVOLUTION KIT 12 M	**67**	1
90753	KIT HAPPY FRESH EVOLUTION KIT 12 M W/TIMER	**67**	1
90759	DRIP KIT PLUS 25 POTS	**117**	1
90763	TIMER KIT 20 PRATICO	**118**	1
90764	DRIP STARTER KIT	**117**	4
90766	TIMER KIT 20 LOGICA	**117**	1
90767	ORTO DRIP KIT	**116**	1
90772	TERRAZZO DRIP KIT	**118**	1
90801	1/2" FEMALE THREADED CAP	**159**	20x2
90802	3/4" FEMALE THREADED CAP	**159**	20x2
90803	1"(26-34 mm) F. x 1" (26-34 mm) M. COUPLING	**157**	10
90805	1" (26-34 mm) M. x 1" (26-34 mm) M. NIPPLE	**159**	40
90807	1" (26-34 mm) F. x 1" (26-34 mm) M. ELBOW	**156**	10
90808	T 1" (26-34 mm) F. x 1" (26-34 mm) F. x 1" (26-34 mm) M.	**156**	10
90809	1" (26-34 mm) M. 3/4" (20-27 mm) F. REDUCER NEW	**159**	30
90812	9 V - 1" (26-34 mm) FEMALE SOLENOID VALVE	**143**	1
90813	9 V - 1" (26-34 mm) MALE SOLENOID VALVE	**143**	1
90814	24 V - 1" (26-34 mm) FEMALE SOLENOID VALVE	**143**	1
90815	24 V - 1" (26-34 mm) MALE SOLENOID VALVE	**143**	1
90821	CONTROL UNIT	**142**	1
90826	1" (26-34 mm) F. PROGRAMMABLE SOLENOID VALVE	**142**	1

Code	Description	Page	Qty
90829	HYDRO-4	**141**	1
90831	RF RAIN SENSOR	**91/141**	1
90858	BRACKET COUPLING FOR TUBE Ø 20 mm HOSE	**161**	10×2
90910	DRAINAGE VALVE	**157**	15×1
90915	RAIN SENSOR	**89/139**	2
90917	Ø 1" (26-34 mm) F MANUAL VALVE	**161**	5
90918	Ø 3/4" (20-27 mm) F MANUAL VALVE	**161**	5
90919	CIRCUIT FILTER	**161**	3
90920	THREADED DRAINAGE VALVE	**109**	4
90929	SPARE ROD FOR QUICK COUPLING VALVE INLET	**162**	5
90930	QUICK-CLICK STANDPIPE	**162**	4
91002	3/4" (20-27 mm) - 1/2" (15-21 mm) MULTI-THREAD TAP CONNECTOR	**102**	14
91006	SPARE 3/4" (20-27 mm) F CONNECTOR	**89**	10
91009	AUTOMATIC COUPLING	**103**	10
91011	IN-LINE FILTER FOR 1/2" (13-16 mm) HOSE	**103**	4
91013	1/2" (13-16 mm) HOSE THREADED ADAPTOR	**103**	14
91015	3/4" (20-27 mm) 1" (26-34 mm) THREADED COUPLING FOR 1/2" (13-16 mm) HOSE	**103**	10
91017	1/2" (15-21 mm) THREADED 3-WAY CONNECTOR	**104**	10
91019	1/2" (15-21 mm) THREADED ELBOW	**104**	12
91021	1/2" (15-21 mm) THREAD ELBOW CONNECTOR	**104**	6
91023	1/2" (13-16 mm) COUPLING	**104**	12
91025	1/2" (13-16 mm) ELBOW COUPLING	**104**	12
91027	1/2" (13-16 mm) CONNECTOR WITH 4 1/4" (4-6 mm) OUTLETS	**105**	4
91029	1/2" (13-16 mm) TEE	**105**	10
91031	IN-LINE FILTER FOR 1/2" (13-16 mm) HOSE	**106**	5
91033	SHUT-OFF VALVE	**105**	10
91035	END STOPPER	**105**	12
91037	THREADED DRAINAGE VALVE	**105**	5
91040	PRESSURE REDUCER	**102**	4
91045	DOUBLE TAP CONNECTOR	**102**	8
91066	3/4" (20-27 mm) 1" (26-34 mm) THREADED COUPLING FOR 1/2" (13-16 mm) HOSE	**107**	10
91070	QUICK-CLICK CONNECTOR FOR 1/2"(13-16 mm) HOSE NEW	**107**	15
91071	1/2" (13-16 mm) TEE	**108**	15
91072	1/2" (15 - 21 mm) THREADED 3-WAY CONNECTOR	**107**	10
91073	1/2" (13-16 mm) - 1/4" (4-6 mm) 2 - WAY COUPLING	**108**	10
91076	1/2" (13-16 mm) COUPLING	**108**	15
91081	1/2" (13-16 mm) ELBOW COUPLING	**108**	15
91082	1/2" (15-21 mm) THREADED ELBOW	**107**	10
91086	1/2" (13-16 mm) END STOPPER	**108**	15
91090	1/2" (13-16 mm) SUPPORT STAKE	**109**	10
91096	TUBE CLAMP	**109**	10
91097	WALL HOSE CLAMPS	**109**	10
91141	1/4" 3-WAY COUPLING	**110**	13
91143	1/4" ELBOW	**110**	13
91145	1/4" 4-WAY COUPLING	**110**	13
91155	1/4" 2-WAY COUPLING	**110**	13
91170	HOLE PLUGS	**110**	13
91185	HOLE PUNCHER/SPANNER	**111**	10
91190	1/4" SUPPORT STAKE	**111**	10
91209	0-6 L/H END-OF-LINE DRIPPER	**113**	10
91211	0-6 L/H END-OF-LINE DRIPPER	**113**	10
91213	0-6 L/H END-OF-LINE DRIPPER	**113**	8
91214	0-10 L/H PLUS END-OF-LINE DRIPPER	**113**	10
91217	0-6 L/H IN-LINE DRIPPER	**113**	10
91218	0-10 L/H PLUS IN-LINE DRIPPER	**113**	10
91222	SELF-REGULATING DRIPPER	**114**	10
91223	SELF-REGULATING DRIPPER ON SPIKE	**115**	6
91225	0-40 L/H ADJUSTABLE DRIPPER	**114**	10
91227	0-40 L/H ADJUSTABLE DRIPPER	**115**	6
91228	0-40 L/H ADJUSTABLE SHRUBBLER	**115**	6
91229	360° MICRO MIST SPRAYER ON SPIKE	**115**	6
91232	ADJUSTABLE SHRUBBLER	**114**	10
91248	180° ADJUSTABLE MICRO-SPRINKLER	**121**	10
91249	360° ADJUSTABLE MICRO-SPRINKLER	**121**	10
91250	360° ADJUSTABLE MICRO-SPRINKLER	**121**	10
91254	90° MICRO-SPRINKLER	**120**	10
91255	180° MICRO-SPRINKLER	**120**	10
91256	360° MICRO-SPRINKLER	**120**	10
91257	MICRO-SPRINKLER STRIP	**120**	10
91258	360° MICRO-MIST SPRAYER	**120**	10
91260	FITTED RIGID RISERS	**121**	10
91265	MICRO-SPRINKLER SUPPORT STAKE	**121**	8
91270	1/4" SHUT-OFF VALVE	**111**	10
91280	1/2" (13-16 mm) SHUT-OFF VALVE	**109**	10
91345	1/2" (13-16 mm) - 1/4" (4-6 mm) HOSE THREADED ADAPTOR	**107**	10
91347	1/2" (13-16 mm) HOSE THREADED ADAPTOR	**107**	10
91494	3/4" (20-27 mm) AUTOMATIC ADAPTOR	**103**	10
91589	3/4" (20-27 mm) MALE THREADED TWO-WAY ADAPTER	**102**	5
99009	AUTOMATIC COUPLING	**103**	25
99013	1/2" (13-16 mm) HOSE THREADED ADAPTOR	**103**	25
99015	3/4" (20-27 mm) 1" (26-34 mm) THREADED COUPLING FOR 1/2" (13-16 mm) HOSE	**103**	25
99017	1/2" (15-21 mm) THREADED 3-WAY CONNECTOR	**104**	25
99019	1/2" (15-21 mm) THREADED ELBOW	**104**	25
99021	1/2" (15-21 mm) THREADED ELBOW CONNECTOR	**104**	25
99023	1/2" (13-16 mm) COUPLING	**104**	25
99025	1/2" (13-16 mm) ELBOW COUPLING	**104**	25
99027	1/2" (13-16 mm) CONNECTOR WITH 4 1/4" (4-6 mm) OUTLETS	**105**	25
99029	1/2" (13-16 mm) TEE	**105**	25
99033	SHUT-OFF VALVE	**105**	25
99035	END STOPPER	**105**	25
99071	1/2" (13-16 mm) TEE	**108**	4×20
99076	1/2" (13-16 mm) COUPLING	**108**	6×20
99081	1/2" (13-16 mm) ELBOW COUPLING	**108**	6×20
99090	1/2" (13-16 mm) SUPPORT STAKE	**109**	4×20
99155	1/4" 2-WAY COUPLING	**110**	20×20
99190	1/4" SUPPORT STAKE	**111**	10×40
99209	0-6 L/H END-OF-LINE DRIPPER	**113**	6×50
99217	0-6 L/H IN-LINE DRIPPER	**113**	6×50
99222	SELF-REGULATING DRIPPER	**114**	10×50
99225	0-40 L/H ADJUSTABLE DRIPPER	**114**	10×50
99228	0-40 L/H ADJUSTABLE SHRUBBLER	**115**	6×25
99232	ADJUSTABLE SHRUBBLER	**114**	10×50

Code	Description	Page	Qty
PUB1090940000	ABOVE-GROUND INFORMATIVE PANEL	**179**	
PUB1091060000	SHOPPER	**177**	
PUB1092000000	DRIP INFORMATIVE PANEL	**179**	
PUB1092010000	UNDERGROUND INFORMATIVE PANEL	**179**	
PUB1092020000	ABOVE-GROUND PANEL	**179**	
PUB1092030000	DRIP PANEL	**179**	
PUB1092040000	UNDERGROUND PANEL	**179**	
PUB1094110000	LEAFLET DISPLAY BOX	**177**	
PUB1094850000	CLABER GUIDE	**177**	
PUB1095470000	CLABER PANEL	**179**	

Code	Description	Page	Qty
8188	CONTROL UNIT	**171**	6
8191	FARM CONTROL UNIT	**171**	6
90000	ADJUSTABLE POP-UP 0°-350° 6 L/MIN - 2"	**172**	100
90001	ADJUSTABLE POP-UP 0°-350° 10 L/MIN - 2"	**172**	100
90003	0°-350° ADJUSTABLE HEAD 6 L/MIN	**173**	1x25
90015	ADJUSTABLE POP-UP 0°-350° 6 L/MIN - 4"	**172**	50
90016	ADJUSTABLE POP-UP 0°-350° 10 L/MIN - 4"	**172**	50
90142	SPRINKLER BODY 2" - 5 cm	**172**	100
90143	SPRINKLER BODY 3" - 7,5 cm	**172**	50
90144	SPRINKLER BODY 4" - 10 cm	**172**	50
90145	0°-350° ADJUSTABLE HEAD 10 L/MIN	**173**	1x25
90152	MEDIUM-JET TURBINE SPRINKLER	**173**	25
90154	LONG-JET TURBINE SPRINKLER	**173**	20
90928	1" F. PROGRAMMABLE SOLENOID VALVE	**171**	6
90938	24 V - 1" FEMALE SOLENOID VALVE	**170**	12
90939	24 V - 1" MALE SOLENOID VALVE	**170**	12

The Bluetooth® brand and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of these trademarks by CLABER is granted under licence.
Other brands and commercial names belong to the respective owners.

PRINTED: SEPTEMBER 2023

claber
I Maestri dell'Acqua

CLABER SPA
Via Pontebbana 22
33080 Fiume Veneto (PN) - Italy

Tel. +39 0434 958836
Fax +39 0434 957193
info@claber.com
www.claber.com

FSC
www.fsc.org
MIX
Paper from responsible sources
FSC® C139514